



- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

BARREL TYPES




N类 N Type
Non-insulated Butted Seam Terminal
端头(裸)尾部未焊缝




D类 D Type
Vinyl Insulated Double Crimp Terminal
(With Easy Entry Copper Sleeve)
端头尾部镶铜套再套PVC绝缘套




NB类 NB Type
Non-insulated Brazed Seam Terminal
端头(裸)尾部焊缝




NYD类 NYD Type
Nylon Insulated Double Crimp Terminal
(With Easy Entry Copper Sleeve)
端头尾部镶铜套再套尼龙绝缘套



V类 V Type
Vinyl Insulated Single Crimp Terminal
端头尾部套PVC绝缘套



NY类 NY Type
Nylon Insulated Single Crimp Terminal
端头尾部套尼龙绝缘套




FD类 FD Type
PC Insulated Double Crimp Terminal
(With Easy Entry Copper Sleeve)
端头尾部镶铜套再套PC绝缘套




EASCO Number Constitution

EASCO 数字选区

端子 Terminals

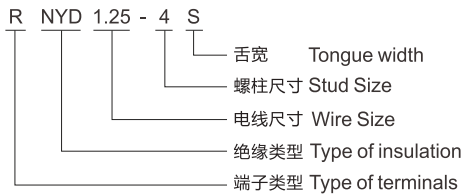

连接器 Connectors

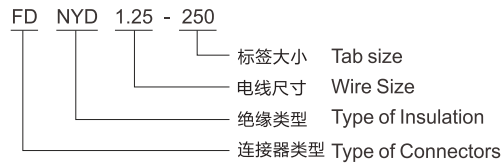

描述 Description 1

类型 Type	端子类型 Type of Terminals	绝缘类型 Type of Insulation	电线尺寸 Wire Size	尺寸 Size	舌宽 Tongue Width
Ring Terminals	圆形端头 R	NYD	1.25 - 3.7		S
Spade Terminals	叉形端头 S	D	2 - 4		M
Locking Spade Terminals	锁扣叉形端头 LS				
Flange Spade terminals	凸形叉形端头 FS				
Hook Terminals	钩形端头 H	NY	5.5 - 5		
Blade Terminals	片形端头 DB				
Lipped Blade Terminals	凹片形端头 LB				
Pin Terminals	针形端头 PT	V	1.25 - 10		
Flag Terminals	FG				
DIN-Ring Terminals	DR				
DIN-Spade Terminals	DS				

Female Disconnects	母接头 FD	NYD	5.5 - 250		
Male Disconnects	公接头 MD				
Female Disconnects--Fully Insulated	母全绝缘接头 FDF	NYD	2 - 250		
Flag Female Disconnects	旗形母接头 FLD	NYD	1.25 - 250		
Piggy Back Disconnects	肩背形公、母接头 PBD				
Female Receptacle Disconnects	子弹形母接头 FR				
Male Bullet Disconnects	子弹形公接头 MP				

Closed End Connectors	尼龙压线帽 CE		1.25		
Butt connectors	长形全绝缘接头 B	V	2		
Cord End Terminals	管形预绝缘端头 E		75 - 12		

描述 Description 2

绝缘类型

Type of insulation

压接型 Crimp Type	绝缘类型 Type of Insulation	绝缘材料 Insulation Material	温度额定值 Temperature Rating
Nylon Insulated-Single Crimp	NY	Nylon	105°C
Vinyl Insulated-Double Crimp	D	Vinyl	75°C
Vinyl Insulated-Single Crimp	V	Vinyl	75°C
Non-Insulated with Brazed seam	NB		

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier


















描述 Description 3

适用端子 APPLICABLE TERMINALS	绝缘颜色代码 INSULATED COLOR CODE			电线尺寸 WIRE SIZE				抗拉强度 TENSILE STRENGTH		MAX CURRENT (A)							
	AREA mm ²			mm ²	AWG	DIAMETER (mm)	AREA (mm ²)	JIS-2805 (kgf)	UL-486A (kgf)								
A1. Wiring Ducts	0.5	0.10-0.4	Yellow														
											0.12	26	0.4050	0.129		1.37	
A2. Cable Ties	0.5	0.10-0.4	Yellow														
A3. Din Rails											0.2	24	0.5110	0.205		2.27	
											A4. Cable Markers	0.3	22	0.6440	0.326		3.63
A5. Cable Clamps	1.25	0.25-1.65															
A6. Wrapping Bands											0.5	20	0.8120	0.518		5.90	12
	A7. Nylon Cable Gland	2		Red	1.04-2.63	Blue	2.63-4.6										
0.75												18	1.0240	0.823		9.07	17
A8. Metal Cable Gland	5.5																
											1.25	16	1.2910	1.309	20.400	13.61	19
A9. Plastic Flexible Conduit	8																
											2	14	1.6280	2.081	29.580	22.68	27
A10. Metal Flexible Conduit	14																
											3.5	12	2.0530	3.310	55.080	31.75	37
A11. Terminal	60																
											5.5	10	2.5880	5.260	79.560	36.29	48
A12. Copper Tube Terminals	80																
											8	8	3.2640	8.368	99.968	40.82	62
A13. Heat Shrinkable Tubings	100																
											14	6	4.1150	13.300	142.800	45.36	88
A14. Bus Bar Insulators	150																
											22	4	5.1890	21.150	183.600	63.50	115
A15. Tool	200																
											38	2	6.540	33.600	255.000	81.65	160
A16. Cable Clip	325																
											60	1/0	8.400	55.500	326.400	113.40	215
A17. Insulating Nut	80																
											80	3/0	10.400	84.950	357.000	158.75	255
A18. Nylon Cable Carrier	100																
											100	4/0	11.680	107.150	397.800	204.11	300
A19. Heat Shrinkable Tubings	150																
											150	300	19.910	151.950	418.200	249.47	395
A20. Heat Shrinkable Tubings	200																
											200	400	16.060	202.600	448.800	294.83	470
A21. Heat Shrinkable Tubings	325																
											325	600	19.670	303.900	489.600	408.22	650

*Note: Advise to use standard electrical wires or which have attestation to work together with KSR products.













*注意: 建议使用标准电线或证明与KSR产品配合使用


Stud Size 螺柱尺寸

标准尺寸 STANDARD SIZE	螺柱尺寸 STUD SIZE		孔尺寸 HOLE SIZE	
	(Inch)	(mm)	(mm)	(Inch)
	#2	2.0	2.2	.087 "
	#3	2.5	2.7	.106 "
	#4	3.0	3.2	.126 "
	#6	3.5	3.7	.146 "
	#8	4.0	4.3	.169 "
	#10	5.0	5.3	.209 "
	1/4 "	6.0	6.4	.252 "
	5/16 "	8.0	8.4	.331 "
	3/8 "	10.0	10.5	.413 "
	7/16 "	11.0	11.5	.453 "
	1/2 "	12.0	13.0	.512 "
	9/16 "	14.0	15.0	.591 "
	5/8 "	16.0	17.0	.669 "
	11/16 "	18.0	19.0	.748 "
	3/4 "	20.0	21.0	.827 "
	7/8 "	22.0	23.0	.906 "
	15/16 "	24.0	25.0	.984 "


Tab Size 标签大小

描述 Description

系列 SERIES	标签大小 TAB SIZE(w)	
	(Inch)	(mm)
110		.110 × .020 "
		.110 × .032 "
187		.187 × .020 "
		.187 × .032 "
205		.205 × .020 "
		.205 × .032 "
250		.250 × .032 "
		.250 × .032 "
312		.312 × .032 "
		.312 × .032 "
375		.375 × .047 "
		.375 × .047 "



螺柱尺寸图 stud size chart

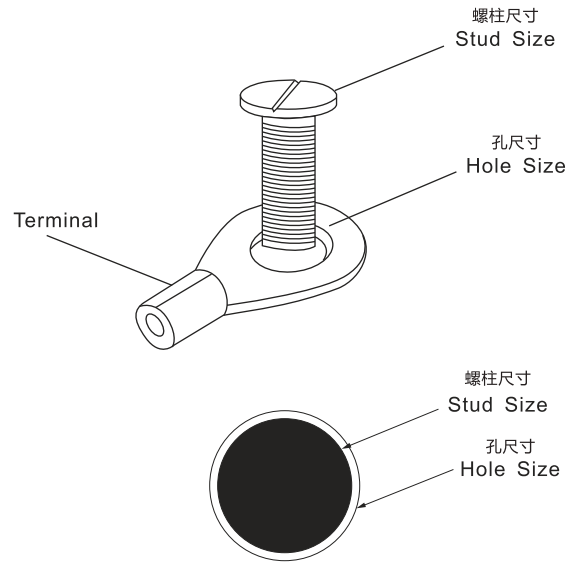


*Note: The charts show standard size just for consulting, specified dimensions subject to stud size and hole size.

*注意: 图表显示标准尺寸只是咨询, 指定的尺寸根据螺柱尺寸和孔尺寸。

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier


CE RoHS EASCO® EN Type Non Insulated Cord End Terminal Lugs (管形裸端子)

Material: Red Copper. (材质:紫铜)
 Plating Material: Tin plating. (表面镀层:镀锡)
 Max Working Temperature: 75°C(最大耐温:75°C)
 Max Voltage: 600V.(最大电压:600V)



Article No.	Part No.	L	W	D	C	Pkg Qty (pcs)
货号	型号					包装数 (个)
A0111.000.0001	EN0206	6.0	1.5	1.1	0.8	2000
A0111.000.0002	EN0208	8.0	1.5	1.1	0.8	2000
A0111.000.0003	EN0306	6.0	1.5	1.1	0.8	2000
A0111.000.0004	EN0308	8.0	1.5	1.1	0.8	2000
A0111.000.0005	EN0506	6.0	1.7	1.3	1.0	2000
A0111.000.0006	EN0508	8.0	1.7	1.3	1.0	2000
A0111.000.0007	EN0510	10.0	1.7	1.3	1.0	2000
A0111.000.0008	EN0512	12.0	1.7	1.3	1.0	2000
A0111.000.0009	EN7506	6.0	1.9	1.5	1.2	2000
A0111.000.0010	EN7508	8.0	1.9	1.5	1.2	2000
A0111.000.0011	EN7510	10.0	1.9	1.5	1.2	2000
A0111.000.0012	EN7512	12.0	1.9	1.5	1.2	2000
A0111.000.0013	EN1006	6.0	2.2	1.7	1.4	2000
A0111.000.0014	EN1008	8.0	2.2	1.7	1.4	2000
A0111.000.0015	EN1010	10.0	2.2	1.7	1.4	2000
A0111.000.0016	EN1012	12.0	2.2	1.7	1.4	2000
A0111.000.0017	EN1018	18.0	2.2	1.7	1.4	2000
A0111.000.0018	EN1508	8.0	2.5	2.0	1.7	2000
A0111.000.0019	EN1510	10.0	2.5	2.0	1.7	2000
A0111.000.0020	EN1512	12.0	2.5	2.0	1.7	2000
A0111.000.0021	EN1518	18.0	2.5	2.0	1.7	2000
A0111.000.0022	EN2506	6.0	3.3	2.6	2.3	2000
A0111.000.0023	EN2508	8.0	3.3	2.6	2.3	2000
A0111.000.0024	EN2510	10.0	3.3	2.6	2.3	2000
A0111.000.0025	EN2512	12.0	3.3	2.6	2.3	2000
A0111.000.0026	EN2518	18.0	3.3	2.6	2.3	2000
A0111.000.0027	EN4009	9.0	3.9	3.2	2.8	1000
A0111.000.0028	EN4012	12.0	3.9	3.2	2.8	1000
A0111.000.0029	EN4018	18.0	3.9	3.2	2.8	1000
A0111.000.0030	EN6010	10.0	4.7	3.9	3.5	1000
A0111.000.0031	EN6012	12.0	4.7	3.9	3.5	1000
A0111.000.0032	EN6018	18.0	4.7	3.9	3.5	1000
A0111.000.0033	EN10-12	12.0	5.8	4.9	4.5	1000
A0111.000.0034	EN10-16	16.0	5.8	4.9	4.5	1000
A0111.000.0035	EN10-18	18.0	5.8	4.9	4.5	1000
A0111.000.0036	EN10-20	20.0	5.8	4.9	4.5	1000
A0111.000.0037	EN10-25	25.0	5.8	4.9	4.5	1000
A0111.000.0038	EN16-12	12.0	7.2	6.2	5.8	1000
A0111.000.0039	EN16-16	16.0	7.2	6.2	5.8	1000
A0111.000.0040	EN16-18	18.0	7.2	6.2	5.8	1000
A0111.000.0041	EN16-20	20.0	7.2	6.2	5.8	1000
A0111.000.0042	EN16-22	22.0	7.2	6.2	5.8	1000
A0111.000.0043	EN16-25	25.0	7.2	6.2	5.8	1000
A0111.000.0044	EN25-12	12.0	9.1	7.9	7.5	500
A0111.000.0045	EN25-16	16.0	9.1	7.9	7.5	500
A0111.000.0046	EN25-18	18.0	9.1	7.9	7.5	500
A0111.000.0047	EN25-22	22.0	9.1	7.9	7.5	500
A0111.000.0048	EN25-25	25.0	9.1	7.9	7.5	500
A0111.000.0049	EN35-16	16.0	10.2	8.7	8.3	500
A0111.000.0050	EN35-20	20.0	10.2	8.7	8.3	500



CE RoHS EASCO® EN Type Non Insulated Cord End Terminal Lugs (管形裸端子)



Article No.	Part No.	L	W	D	C	Pkg Qty (pcs)
货号	型号					包装数 (个)
A0111.000.0051	EN35-25	25.0	10.2	8.7	8.3	500
A0111.000.0052	EN50-12	12.0	12.7	10.9	10.3	500
A0111.000.0053	EN50-18	18.0	12.7	10.9	10.3	500
A0111.000.0054	EN50-22	22.0	12.7	10.9	10.3	500
A0111.000.0055	EN50-25	25.0	12.7	10.9	10.3	500
A0111.000.0056	EN70-22	22.0	15.8	14.3	13.5	200
A0111.000.0057	EN70-25	25.0	15.8	14.3	13.5	200
A0111.000.0058	EN70-32	32.0	15.8	14.3	13.5	200
A0111.000.0059	EN95-25	25.0	17.3	15.6	14.8	100

CE RoHS EASCO® E Type Cord End Terminal Lugs (管形单线端子)


Material: Red Copper with PE insulation. (材质: 紫铜, 聚乙烯)
 Plating Material: Tin plating. (表面镀层: 镀锡)
 Max Working Temperature: 75°C (最大耐温: 75°C)
 Max Voltage: 600V. (最大电压: 600V)



Article No.	Part No.	F	L	W	H	D	C	Pkg Qty (pcs)	Color
货号	型号							包装数 (个)	颜色
A0111.001.0001	E0306	6	10.4	1.9	4.4	1.1	0.8	1000	Pink, Sky Blue (粉红色, 天蓝色)
A0111.001.0002	E0308	8	12.4	1.9	4.4	1.1	0.8	1000	Pink, Sky Blue (粉红色, 天蓝色)
A0111.001.0003	E0506	6	12	2.6	6	1.3	1	1000	Orange, White (橙色, 白色)
A0111.001.0004	E0508	8	14	2.6	6	1.3	1	1000	Orange, White (橙色, 白色)
A0111.001.0005	E0510	10	16	2.6	6	1.3	1	1000	Orange, White (橙色, 白色)
A0111.001.0006	E0512	12	18	2.6	6	1.3	1	1000	Orange, White (橙色, 白色)
A0111.001.0007	E7506	6	12.3	2.8	6.3	1.5	1.2	1000	White, Blue (白色, 蓝色)
A0111.001.0008	E7508	8	14.3	2.8	6.3	1.5	1.2	1000	White, Blue (白色, 蓝色)
A0111.001.0009	E7508L	8	14.5	3	6.5	1.5	1.2	1000	White, Blue (白色, 蓝色)
A0111.001.0010	E7510	10	16.3	2.8	6.3	1.5	1.2	1000	White, Blue (白色, 蓝色)
A0111.001.0011	E7512	12	18.3	2.8	6.3	1.5	1.2	1000	White, Blue (白色, 蓝色)
A0111.001.0012	E7518	18	24.3	2.8	6.3	1.5	1.2	1000	White, Blue (白色, 蓝色)
A0111.001.0013	E1006	6	12.3	3	6.3	1.7	1.4	1000	Yellow, Red (黄色, 红色)
A0111.001.0014	E1008	8	14.6	3	6.3	1.7	1.4	1000	Yellow, Red (黄色, 红色)
A0111.001.0015	E1008L	8	14.5	3.3	6.5	1.7	1.4	1000	Yellow, Red (黄色, 红色)


- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS EASCO® E Type Cord End Terminal Lugs (管形单线端子)



Article No.	Part No.	F	L	W	H	D	C	Pkg Qty (pcs)	Color
货号	型号							包装数 (个)	颜色
A0111.001.0016	E1010	10	16.3	3	6.3	1.7	1.4	1000	Yellow,Red (黄色, 红色)
A0111.001.0017	E1012	12	18.3	3	6.3	1.7	1.4	1000	Yellow,Red (黄色, 红色)
A0111.001.0018	E1012L	8	18.5	3.3	6.5	1.7	1.4	1000	Yellow,Red (黄色, 红色)
A0111.001.0019	E1018	18	24.3	3	6.3	1.7	1.4	1000	Yellow,Red (黄色, 红色)
A0111.001.0020	E1508	8	14.3	3.5	6.5	2	1.7	1000	Red,Black (红色, 黑色)
A0111.001.0021	E1508L	8	14.5	3.8	6.5	2	1.7	1000	Red,Black (红色, 黑色)
A0111.001.0022	E1510	10	16.36	3.5	6.5	2	1.7	1000	Red,Black (红色, 黑色)
A0111.001.0023	E1512	12	18.3	3.5	6.5	2	1.7	1000	Red,Black (红色, 黑色)
A0111.001.0024	E1518	18	24.3	3.5	6.5	2	1.7	1000	Red,Black (红色, 黑色)
A0111.001.0025	E2508	8	15.4	4	7.4	2.6	2.3	1000	Blue,Grey (蓝色, 灰色)
A0111.001.0026	E2510	10	17.4	4	7.4	2.6	2.3	1000	Blue,Grey (蓝色, 灰色)
A0111.001.0027	E2512	12	19.4	4	7.4	2.6	2.3	1000	Blue,Grey (蓝色, 灰色)
A0111.001.0028	E2518	18	25.4	4	7.4	2.6	2.3	1000	Blue,Grey (蓝色, 灰色)
A0111.001.0029	E4009	9	16.4	4.8	7.4	3.2	2.8	1000	Grey,Orange (灰色, 橙色)
A0111.001.0030	E4010	10	17.4	4.8	7.4	3.2	2.8	1000	Grey,Orange (灰色, 橙色)
A0111.001.0031	E4012	12	19.4	4.8	7.4	3.2	2.8	1000	Grey,Orange (灰色, 橙色)
A0111.001.0032	E4015	15	22.4	4.8	7.4	3.2	2.8	1000	Grey,Orange (灰色, 橙色)
A0111.001.0033	E4018	18	25.4	4.8	7.4	3.2	2.8	1000	Grey,Orange (灰色, 橙色)
A0111.001.0034	E6012	12	20.5	6	8.5	3.9	3.5	1000	Black,Green (黑色, 绿色)
A0111.001.0035	E6018	18	26.5	6	8.5	3.9	3.5	1000	Black,Green (黑色, 绿色)
A0111.001.0036	E10-12	12	20.8	7.5	8.8	4.9	4.5	500	Beige,Brown (乳白色, 褐棕色)
A0111.001.0037	E10-18	18	26.8	7.5	8.8	4.9	4.5	500	Beige,Brown (乳白色, 褐棕色)
A0111.001.0038	E16-12	12	22	8.7	10	6.2	5.8	500	Green,Beige (绿色, 乳白色)
A0111.001.0039	E16-18	18	28	8.7	10	6.2	5.8	500	Green,Beige (绿色, 乳白色)
A0111.001.0040	E25-12	12	24	11	12	7.9	7.5	250	Brown,Black (褐棕色, 黑色)
A0111.001.0041	E25-16	16	28	11	12	7.9	7.5	250	Brown,Black (褐棕色, 黑色)

CE RoHS EASCO® E Type Cord End Terminal Lugs (管形单线端子)



Article No.	Part No.	F	L	W	H	D	C	Pkg Qty (pcs)	Color
货号	型号							包装数 (个)	颜色
A0111.001.0042	E25-18	18	30	11	12	7.9	7.5	250	Brown,Black (褐棕色, 黑色)
A0111.001.0043	E25-22	22	34	11	12	7.9	7.5	250	Brown,Black (褐棕色, 黑色)
A0111.001.0044	E35-16	16	30	12.5	14	8.7	8.3	250	Grey (灰色)
A0111.001.0045	E35-18	18	32	12.5	14	8.7	8.3	250	Grey (灰色)
A0111.001.0046	E35-22	22	36	12.5	14	8.7	8.3	250	Grey (灰色)
A0111.001.0047	E35-25	25	39	12.5	14	8.7	8.3	250	Grey (灰色)
A0111.001.0048	E50-12	12	28	15	16	10.9	10.3	250	Olive Green (橄榄绿)
A0111.001.0049	E50-20	20	36	15	16	10.9	10.3	250	Olive Green (橄榄绿)
A0111.001.0050	E50-25	25	41	15	16	10.9	10.3	250	Olive Green (橄榄绿)
A0111.001.0051	E70-20	20	37	16	17	14.3	13.5	100	Yellow (黄色)
A0111.001.0052	E70-25	25	42	16	17	14.3	13.5	100	Yellow (黄色)
A0111.001.0053	E95-25	25	44	18.5	19	15.6	14.8	100	Red(红色)
A0111.001.0054	E120-27	27	47.6	20.3	20.6	17.7	16.7	50	Blue (蓝色)
A0111.001.0055	E120-32	32	52.6	20.3	20.6	17.7	16.7	50	Blue (蓝色)
A0111.001.0056	E150-25	25	50.6	23.4	25.6	20.6	19.6	50	Yellow (黄色)
A0111.001.0057	E150-27	27	52.6	23.4	25.6	20.6	19.6	50	Yellow (黄色)
A0111.001.0058	E150-32	32	57.6	23.4	25.6	20.6	19.6	50	Yellow (黄色)

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

A1.
Wiring
Ducts

A2.
Cable
Ties

A3.
Din
Rails

A4.
Cable
Markers

A5.
Cable
Clamps

A6.
Wrapping
Bands

A7.
Nylon
Cable Gland

A8.
Metal
Cable Gland

A9.
Plastic
Flexible
Conduit

A10.
Metal
Flexible
Conduit

A11.
Terminal

A12.
Copper
Tube
Terminals

A13.
Heat
Shrinkable
Tubings

A14.
Bus Bar
Insulators

A15.
Tool



A16.
Cable
Clip

A17.
Insulating
Nut

A18.
Nylon Cable
Carrier

CE RoHS EASCO® TE Type Dual Entry Cord End Terminal Lugs (管形双线端子)

Material: Red Copper with PE insulation. (材质: 紫铜, 聚乙烯)
 Plating Material: Tin plating. (表面镀层: 镀锡)
 Max Working Temperature: 75°C (最大耐温: 75°C)
 Max Voltage: 600V. (最大电压: 600V)




Article No.	Part No.	F	L	W	H	D	C	Pkg Qty (pcs)	Color
货号	型号							包装数 (个)	颜色
A0111.002.0001	TE0508	8.0	14.5	5.0	6.5	1.8	1.5	1000	White (白色)
A0111.002.0002	TE0510	10.0	16.5	5.0	6.5	1.8	1.5	1000	Orange (橙色)
A0111.002.0003	TE7508	8.0	14.7	5.5	6.7	2.1	1.8	1000	Blue,Grey (蓝色, 灰色)
A0111.002.0004	TE7510	10.0	16.7	5.5	6.7	2.1	1.8	1000	Blue,Grey (蓝色, 灰色)
A0111.002.0005	TE7512	12.0	18.9	5.5	6.7	2.1	1.8	1000	Blue,Grey (蓝色, 灰色)
A0111.002.0006	TE1008	8.0	15.1	5.5	7.1	2.3	2.0	1000	Red (红色)
A0111.002.0007	TE1010	10.0	17.1	5.5	7.1	2.3	2.0	1000	Red (红色)
A0111.002.0008	TE1508	8.0	15.5	6.4	7.5	2.6	2.3	1000	Black (黑色)
A0111.002.0009	TE1512	12.0	19.5	6.4	7.5	2.6	2.3	1000	Yellow (黄色)
A0111.002.0010	TE2510	10.0	18.5	8.0	8.5	3.3	2.9	1000	Grey (灰色)
A0111.002.0011	TE2513	13.0	21.5	8.0	8.5	3.3	2.9	1000	Blue (蓝色)
A0111.002.0012	TE4012	12.0	23.1	8.8	11.1	4.2	3.8	1000	Grey,Orange (灰色, 橙色)
A0111.002.0013	TE6014	14.0	26.1	9.5	12.1	5.3	4.9	500	Grey,Yellow (灰色, 黄色)
A0111.002.0014	TE10-14	14.0	26.6	12.6	12.6	6.9	6.5	500	Brown,Red (棕色, 红色)
A0111.002.0015	TE16-14	14.0	31.3	19.0	17.3	8.7	8.3	250	Beige,Blue (乳白色, 蓝色)

CE RoHS EASCO® RNB Type Non Insulated Ring Terminal Lugs (圆形裸端头)



Material: Red Copper
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)
		螺柱口直径	美制螺旋号	d2	W	F	L	H	d1	D	T	
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数 (个)
A0111.003.0001	RNB0.5-2S	2	#2	2.2	3.7	4.15	12.35	4.3	1.2	2.2	0.5	1000
A0111.003.0002	RNB0.5-2	2	#2	2.2	5.0	6.0	12.8	4.3	1.2	2.2	0.5	1000
A0111.003.0003	RNB0.5-2.5	2.5	#3	2.7	5.0	6.0	12.8	4.3	1.2	2.2	0.5	1000
A0111.003.0004	RNB0.5-3	3	#4	3.2	5.0	6.0	12.8	4.3	1.2	2.2	0.5	1000
A0111.003.0005	RNB0.5-4	4	#8	4.3	6.5	7.75	15	4.3	1.2	2.2	0.5	1000
A0111.003.0006	RNB0.5-5	5	#10	5.3	8.0	8.0	16.0	4.3	1.2	2.2	0.5	1000
A0111.003.0007	RNB1.25-3.2	3	#4	3.2	5.7	4.95	12.6	4.8	1.7	3.4	0.7	1000
A0111.003.0008	RNB1.25-3.5S	3.5	#6	3.7	5.7	4.95	12.6	4.8	1.7	3.4	0.7	1000
A0111.003.0009	RNB1.25-3.5M	3.5	#6	3.7	6.6	6.3	14.4	4.8	1.7	3.4	0.7	1000
A0111.003.0010	RNB1.25-3.5L	3.5	#6	3.7	8.0	7.0	15.8	4.8	1.7	3.4	0.7	1000
A0111.003.0011	RNB1.25-4S	4	#8	4.3	6.6	6.3	14.4	4.8	1.7	3.4	0.7	1000
A0111.003.0012	RNB1.25-4L	4	#8	4.3	8.0	7.0	15.8	4.8	1.7	3.4	0.7	1000
A0111.003.0013	RNB1.25-5	5	#10	5.3	8.0	7.0	15.8	4.8	1.7	3.4	0.7	1000
A0111.003.0014	RNB1.25-5L	5	#10	5.3	9.8	8.3	17.8	4.8	1.7	3.4	0.7	1000
A0111.003.0015	RNB1.25-5XL	5	#10	5.3	11.6	11.2	21.8	4.8	1.7	3.4	0.7	1000
A0111.003.0016	RNB1.25-6S	6	1/4"	6.4	9.8	8.3	17.8	4.8	1.7	3.4	0.7	1000
A0111.003.0017	RNB1.25-6	6	1/4"	6.4	11.6	11.2	21.8	4.8	1.7	3.4	0.7	1000
A0111.003.0018	RNB1.25-8	a	5/16"	8.4	11.6	11.2	21.8	4.8	1.7	3.4	0.7	1000
A0111.003.0019	RNB1.25-8L	8	5/16"	8.4	13.6	13.9	25.5	4.8	1.7	3.4	0.7	1000
A0111.003.0020	RNB1.25-10	10	3/8"	10.5	13.6	13.9	25.5	4.8	1.7	3.4	0.7	1000
A0111.003.0021	RNB1.25-10L	10	3/8"	10.5	19.2	16.6	30.9	4.8	1.7	3.4	0.7	1000
A0111.003.0022	RNB1.25-12	12	1/2"	13.0	19.2	16.6	30.9	4.8	1.7	3.4	0.7	1000
A0111.003.0023	RNB1.25-14	14	9/16"	15.0	27.0	21.0	39.3	4.8	1.7	3.4	0.7	500
A0111.003.0024	RNB1.25-16	16	5/8"	17.0	27.0	21.0	39.3	4.8	1.7	3.4	0.7	500
A0111.003.0025	RNB1.25-18	18	11/16"	19.0	27.0	21.0	39.3	4.8	1.7	3.4	0.7	500
A0111.003.0026	RNB1.25-20	20	3/4"	21.0	27.0	21.0	39.3	4.8	1.7	3.4	0.7	500
A0111.003.0027	RNB2-3.2S	3	#4	3.2	5.5	4.2	12.3	4.8	2.3	4.0	0.8	1000
A0111.003.0028	RNB2-3.2	3	#4	3.2	6.6	4.2	12.3	4.8	2.3	4.0	0.8	1000
A0111.003.0029	RNB2-3.5	3.5	#6	3.7	6.6	4.2	12.3	4.8	2.3	4.0	0.8	1000
A0111.003.0030	RNB2-3.5M	3.5	#6	3.7	6.6	6.3	14.5	4.8	2.3	4.0	0.8	1000
A0111.003.0031	RNB2-3.5L	3.5	#6	3.7	8.5	7.75	16.8	4.8	2.3	4.0	0.8	1000
A0111.003.0032	RNB2-4S	4	#8	4.3	6.6	6.3	14.5	4.8	2.3	4.0	0.8	1000
A0111.003.0033	RNB2-4L	4	#8	4.3	8.5	7.5	16.5	4.8	2.3	4.0	0.8	1000
A0111.003.0034	RNB2-5S	5	#10	5.3	8.5	7.5	16.5	4.8	2.3	4.0	0.8	1000
A0111.003.0035	RNB2-5L	5	#10	5.3	9.5	7.4	16.8	4.8	2.3	4.0	0.8	1000
A0111.003.0036	RNB2-6S	6	1/4"	6.4	9.5	7.4	16.8	4.8	2.3	4.0	0.8	1000
A0111.003.0037	RNB2-6	6	1/4"	6.4	12.0	11.0	21.8	4.8	2.3	4.0	0.8	1000
A0111.003.0038	RNB2-8	8	5/16"	8.4	12.0	11.0	21.8	4.8	2.3	4.0	0.8	1000
A0111.003.0039	RNB2-8L	8	5/16"	8.4	13.6	13.9	25.5	4.8	2.3	4.0	0.8	1000
A0111.003.0040	RNB2-10	10	3/8"	10.5	13.6	13.9	25.5	4.8	2.3	4.0	0.8	1000
A0111.003.0041	RNB2-10L	10	3/8"	10.5	19.2	16.6	31.0	4.8	2.3	4.0	0.8	500
A0111.003.0042	RNB2-12	12	1/2"	13.0	19.2	16.6	31.0	4.8	2.3	4.0	0.8	500
A0111.003.0043	RNB2-14	14	9/16"	15.0	27.0	21.0	39.3	4.8	2.3	4.0	0.8	500
A0111.003.0044	RNB2-16	16	5/8"	17.0	27.0	21.0	39.3	4.8	2.3	4.0	0.8	500
A0111.003.0045	RNB2-18	18	11/16"	19.0	27.0	21.0	39.3	4.8	2.3	4.0	0.8	500
A0111.003.0046	RNB2-20	20	3/4"	21.0	27.0	21.0	39.3	4.8	2.3	4.0	0.8	500
A0111.003.0047	RNB3.5-3S	3	#4	3.2	5.5	8.0	16.8	6.0	2.9	5.0	1.0	1000

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS EASCO® RNB Type Non Insulated Ring Terminal Lugs (圆形裸端头)



Material: Red Copper
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)
		螺柱口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数 (个)
A0111.003.0048	RNB3.5-3	3	#4	3.2	8.0	8.0	18.0	6.0	2.9	5.0	1.0	1000
A0111.003.0049	RNB3.5-4S	4	#8	4.3	7.2	8.0	17.6	6.0	2.9	5.0	1.0	1000
A0111.003.0050	RNB3.5-4	4	#8	4.3	8.0	8.0	18.0	6.0	2.9	5.0	1.0	1000
A0111.003.0051	RNB3.5-4L	4	#8	4.3	9.5	8.5	18.7	6.0	2.9	5.0	1.0	1000
A0111.003.0052	RNB3.5-5S	5	#10	5.3	8.0	8.0	18.0	6.0	2.9	5.0	1.0	1000
A0111.003.0053	RNB3.5-5M	5	#10	5.3	9.5	8.5	18.7	6.0	2.9	5.0	1.0	1000
A0111.003.0054	RNB3.5-5L	5	#10	5.3	12.0	9.4	21.4	6.0	2.9	5.0	1.0	1000
A0111.003.0055	RNB3.5-6	6	1/4"	6.4	12.0	9.4	21.4	6.0	2.9	5.0	1.0	1000
A0111.003.0056	RNB3.5-8	8	5/16"	8.4	15.0	13.7	27.0	6.0	2.9	5.0	1.0	1000
A0111.003.0057	RNB3.5-10	10	3/8"	10.5	15.0	13.7	27.0	6.0	2.9	5.0	1.0	1000
A0111.003.0058	RNB3.5-12	12	1/2"	13.0	19.2	16.0	31.6	6.0	2.9	5.0	1.0	500
A0111.003.0059	RNB5.5-3	3	#4	3.2	7.2	5.9	16.3	6.8	3.4	5.5	1.0	1000
A0111.003.0060	RNB5.5-3.5	3.5	#6	3.7	7.2	5.9	16.3	6.8	3.4	5.5	1.0	1000
A0111.003.0061	RNB5.5-4S	4	#8	4.3	7.2	5.9	16.3	6.8	3.4	5.5	1.0	1000
A0111.003.0062	RNB5.5-4L	4	#8	4.3	9.5	8.3	18.8	6.8	3.4	5.5	1.0	1000
A0111.003.0063	RNB5.5-5	5	#10	5.3	9.5	8.3	18.8	6.8	3.4	5.5	1.0	1000
A0111.003.0064	RNB5.5-6	6	1/4"	6.4	12.0	10.5	23.3	6.8	3.4	5.5	1.0	1000
A0111.003.0065	RNB5.5-6L	6	1/4"	6.4	12.0	13.0	25.8	6.8	3.4	5.5	1.0	1000
A0111.003.0066	RNB5.5-8	8	5/16"	8.4	15.0	13.5	27.8	6.8	3.4	5.5	1.0	1000
A0111.003.0067	RNB5.5-10	10	3/8"	10.5	15.0	13.5	27.8	6.8	3.4	5.5	1.0	1000
A0111.003.0068	RNB5.5-12	12	1/2"	13.0	19.2	16.0	32.3	6.8	3.4	5.5	1.0	500
A0111.003.0069	RNB5.5-14	14	9/16"	15.0	32.0	25.2	48.0	6.8	3.4	5.5	1.0	500
A0111.003.0070	RNB5.5-16	16	5/8"	17.0	32.0	25.2	48.0	6.8	3.4	5.5	1.0	500
A0111.003.0071	RNB5.5-18	18	11/16"	19.0	32.0	25.2	48.0	6.8	3.4	5.5	1.0	500
A0111.003.0072	RNB5.5-20	20	3/4"	21.0	32.0	25.2	48.0	6.8	3.4	5.5	1.0	500
A0111.003.0073	RNB8-4S	4	#8	4.3	8.0	9.3	21.8	8.5	4.5	7.2	1.2	500
A0111.003.0074	RNB8-4	4	#8	4.3	8.8	10.9	23.8	8.5	4.5	7.2	1.2	500
A0111.003.0075	RNB8-4L	4	#8	4.3	12.0	9.3	23.8	8.5	4.5	7.2	1.2	500
A0111.003.0076	RNB8-5S	5	#10	5.3	8.8	10.9	23.8	8.5	4.5	7.2	1.2	500
A0111.003.0077	RNB8-5M	5	#10	5.3	12.0	9.3	23.8	8.5	4.5	7.2	1.2	500
A0111.003.0078	RNB8-5L	5	#10	5.3	15.0	13.8	29.8	8.5	4.5	7.2	1.2	500
A0111.003.0079	RNB8-6S	6	1/4"	6.4	12.0	9.3	23.8	8.5	4.5	7.2	1.2	500
A0111.003.0080	RNB8-6L	6	1/4"	6.4	15.0	13.8	29.8	8.5	4.5	7.2	1.2	500
A0111.003.0081	RNB8-8	8	5/16"	8.4	15.0	13.8	29.8	8.5	4.5	7.2	1.2	500
A0111.003.0082	RNB8-10	10	3/8"	10.5	15.0	13.8	29.8	8.5	4.5	7.2	1.2	500
A0111.003.0083	RNB8-12	12	1/2"	13.0	20.0	15.0	33.5	8.5	4.5	7.2	1.2	500
A0111.003.0084	RNB8-14	14	9/16"	15.0	31.6	25.2	49.5	8.5	4.5	7.2	1.2	500
A0111.003.0085	RNB8-16	16	5/8"	17.0	31.6	25.2	49.5	8.5	4.5	7.2	1.2	500
A0111.003.0086	RNB8-18	18	11/16"	19.0	31.6	25.2	49.5	8.5	4.5	7.2	1.2	500
A0111.003.0087	RNB8-20	20	3/4"	21.0	31.6	25.2	49.5	8.5	4.5	7.2	1.2	500
A0111.003.0088	RNB8-22	22	7/8"	23.0	31.6	25.2	49.5	8.5	4.5	7.2	1.2	500
A0111.003.0089	RNB8-24	24	15/16"	25.0	31.6	25.2	49.5	8.5	4.5	7.2	1.2	500
A0111.003.0090	RNB14-4	4	#8	4.3	12.0	13.3	29.8	10.5	6.0	9.0	1.4	500
A0111.003.0091	RNB14-5	5	#10	5.3	12.0	13.3	29.8	10.5	6.0	9.0	1.4	500
A0111.003.0092	RNB14-6S	6	1/4"	6.4	12.0	13.3	29.8	10.5	6.0	9.0	1.4	500
A0111.003.0093	RNB14-6L	6	1/4"	6.4	16.0	14.3	32.8	10.5	6.0	9.0	1.4	500
A0111.003.0094	RNB14-8	8	5/16"	8.4	16.0	14.3	32.8	10.5	6.0	9.0	1.4	500

CE RoHS EASCO® RNB Type Non Insulated Ring Terminal Lugs (圆形裸端头)



Material: Red Copper
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)
		螺柱口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	
货号	型号	Metric	American	包装数 (个)								
A0111.003.0095	RNB14-10	10	3/8"	10.5	16.0	14.3	32.8	10.5	6.0	9.0	1.4	500
A0111.003.0096	RNB14-10L	10	3/8"	10.5	22.0	19.5	41.0	10.5	6.0	9.0	1.4	250
A0111.003.0097	RNB14-12	12	1/2"	13.0	22.0	19.5	41.0	10.5	6.0	9.0	1.4	250
A0111.003.0098	RNB14-14	14	9/16"	15.0	28.0	24.0	48.5	10.5	6.0	9.0	1.4	250
A0111.003.0099	RNB14-16	16	5/8"	17.0	28.0	24.0	48.5	10.5	6.0	9.0	1.4	250
A0111.003.0100	RNB14-18	18	11/16"	19.0	28.0	24.0	48.5	10.5	6.0	9.0	1.4	250
A0111.003.0101	RNB14-20	20	3/4"	21.0	28.0	24.0	48.5	10.5	6.0	9.0	1.4	250
A0111.003.0102	RNB14-22	22	7/8"	23.0	28.0	24.0	48.5	10.5	6.0	9.0	1.4	250
A0111.003.0103	RNB22-4	4	#8	4.3	12.2	15.1	33.2	12.0	8.1	11.5	1.8	200
A0111.003.0104	RNB22-5S	5	#10	5.3	12.2	15.1	33.2	12.0	8.1	11.5	1.8	200
A0111.003.0105	RNB22-5L	5	#10	5.3	16.5	13.5	33.7	12.0	8.1	11.5	1.8	200
A0111.003.0106	RNB22-6S	6	1/4"	6.4	12.2	15.1	33.2	12.0	8.1	11.5	1.8	200
A0111.003.0107	RNB22-6L	6	1/4"	6.4	16.5	13.5	33.7	12.0	8.1	11.5	1.8	200
A0111.003.0108	RNB22-8	8	5/16"	8.4	16.5	13.5	33.7	12.0	8.1	11.5	1.8	200
A0111.003.0109	RNB22-10	10	3/8"	10.5	16.5	13.5	33.7	12.0	8.1	11.5	1.8	200
A0111.003.0110	RNB22-10L	10	3/8"	10.5	22.0	19.5	42.5	12.0	8.1	11.5	1.8	200
A0111.003.0111	RNB22-12	12	1/2"	13.0	22.0	19.5	42.5	12.0	8.1	11.5	1.8	200
A0111.003.0112	RNB22-14	14	9/16"	15.0	28.0	24.0	50.0	12.0	8.1	11.5	1.8	200
A0111.003.0113	RNB22-16	16	5/8"	17.0	28.0	24.0	50.0	12.0	8.1	11.5	1.8	200
A0111.003.0114	RNB22-18	18	11/16"	19.0	28.0	24.0	50.0	12.0	8.1	11.5	1.8	200
A0111.003.0115	RNB22-20	20	3/4"	21.0	28.0	24.0	50.0	12.0	8.1	11.5	1.8	200
A0111.003.0116	RNB22-22	22	7/8"	23.0	28.0	24.0	50.0	12.0	8.1	11.5	1.8	200
A0111.003.0117	RNB38-5	5	#10	5.3	15.3	17.4	39.0	14.0	9.7	13.3	1.8	100
A0111.003.0118	RNB38-6S	6	1/4"	6.4	15.3	17.4	39.0	14.0	9.7	13.3	1.8	100
A0111.003.0119	RNB38-6L	6	1/4"	6.4	22.0	17.7	42.7	14.0	9.7	13.3	1.8	100
A0111.003.0120	RNB38-8S	8	5/16"	8.4	15.3	17.4	39.0	14.0	9.7	13.3	1.8	100
A0111.003.0121	RNB38-8L	8	5/16"	8.4	22.0	17.7	42.7	14.0	9.7	13.3	1.8	100
A0111.003.0122	RNB38-10S	10	3/8"	10.5	15.3	17.4	39.0	14.0	9.7	13.3	1.8	100
A0111.003.0123	RNB38-10L	10	3/8"	10.5	22.0	17.7	42.7	14.0	9.7	13.3	1.8	100
A0111.003.0124	RNB38-12	12	1/2"	13.0	22.0	17.7	42.7	14.0	9.7	13.3	1.8	100
A0111.003.0125	RNB38-14	14	9/16"	15.0	28.0	24.0	52.0	14.0	9.7	13.3	1.8	100
A0111.003.0126	RNB38-16	16	5/8"	17.0	28.0	24.0	52.0	14.0	9.7	13.3	1.8	100
A0111.003.0127	RNB38-18	18	3/4"	21.0	28.0	24.0	52.0	14.0	9.7	13.3	1.8	100
A0111.003.0128	RNB38-20	20	3/4"	21.0	28.0	24.0	52.0	14.0	9.7	13.3	1.8	100
A0111.003.0129	RNB38-22	22	7/8"	23.0	28.0	24.0	52.0	14.0	9.7	13.3	1.8	100
A0111.003.0130	RNB60-6S	6	1/4"	6.4	16.0	17.7	43.7	18.0	11.8	15.4	1.8	100
A0111.003.0131	RNB60-8S	8	5/16"	8.4	16.0	17.7	43.7	18.0	11.8	15.4	1.8	100
A0111.003.0132	RNB60-10S	10	3/8"	10.5	16.0	17.7	43.7	18.0	11.8	15.4	1.8	100
A0111.003.0133	RNB60-12S	12	1/2"	13.0	19.0	17.7	45.2	18.0	11.8	15.4	1.8	100
A0111.003.0134	RNB60-5	5	#10	5.3	22.0	20.7	49.7	18.0	11.8	15.4	1.8	100
A0111.003.0135	RNB60-6	6	1/4"	6.4	22.0	20.7	49.7	18.0	11.8	15.4	1.8	100
A0111.003.0136	RNB60-8	8	5/16"	8.4	22.0	20.7	49.7	18.0	11.8	15.4	1.8	100
A0111.003.0137	RNB60-10	10	3/8"	10.5	22.0	20.7	49.7	18.0	11.8	15.4	1.8	100
A0111.003.0138	RNB60-12	12	1/2"	13.0	22.0	20.7	49.7	18.0	11.8	15.4	1.8	100
A0111.003.0139	RNB60-14	14	9/16"	15.0	32.0	23.5	57.5	18.0	11.8	15.4	1.8	50
A0111.003.0140	RNB60-16	16	5/8"	17.0	32.0	23.5	57.5	18.0	11.8	15.4	1.8	50
A0111.003.0141	RNB60-18	18	11/16"	19.0	32.0	23.5	57.5	18.0	11.8	15.4	1.8	50

A1. Wiring Ducts
A2. Cable Ties
A3. Din Rails
A4. Cable Markers
A5. Cable Clamps
A6. Wrapping Bands
A7. Nylon Cable Gland
A8. Metal Cable Gland
A9. Plastic Flexible Conduit
A10. Metal Flexible Conduit
A11. Terminal
A12. Copper Tube Terminals
A13. Heat Shrinkable Tubings
A14. Bus Bar Insulators
A15. Tool
A16. Cable Clip
A17. Insulating Nut
A18. Nylon Cable Carrier

CE RoHS EASCO® RNB Type Non Insulated Ring Terminal Lugs (圆形裸端头)



Material: Red Copper
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)
		螺柱口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数 (个)
A0111.003.0142	RNB60-20	20	3/4"	21.0	32.0	23.5	57.5	18.0	11.8	15.4	1.8	50
A0111.003.0143	RNB60-22	22	7/8"	23.0	32.0	23.5	57.5	18.0	11.8	15.4	1.8	50
A0111.003.0144	RNB60-24	24	15/16"	25.0	32.0	23.5	57.5	18.0	11.8	15.4	1.8	50
A0111.003.0145	RNB70-6S	6	1/4"	6.4	17.5	20.0	47.0	18.0	13.5	17.5	1.9	50
A0111.003.0146	RNB70-8S	8	5/16"	8.4	17.5	20.0	47.0	18.0	13.5	17.5	1.9	50
A0111.003.0147	RNB70-10S	10	3/8"	10.5	22.0	20.0	50.0	18.0	13.5	17.5	1.9	50
A0111.003.0148	RNB70-12S	12	1/2"	13.0	22.0	20.0	50.0	18.0	13.5	17.5	1.9	50
A0111.003.0149	RNB70-6	6	1/4"	6.4	24.0	20.0	51.0	19.0	13.5	17.5	1.9	50
A0111.003.0150	RNB70-8	8	5/16"	8.4	24.0	20.0	51.0	19.0	13.5	17.5	1.9	50
A0111.003.0151	RNB70-10	10	3/8"	10.5	24.0	20.0	51.0	19.0	13.5	17.5	1.9	50
A0111.003.0152	RNB70-12	12	1/2"	13.0	24.0	20.0	51.0	19.0	13.5	17.5	1.9	50
A0111.003.0153	RNB70-14	14	9/16"	15.0	32.0	26.0	61.0	19.0	13.5	17.5	1.9	50
A0111.003.0154	RNB70-16	16	5/8"	17.0	32.0	26.0	61.0	19.0	13.5	17.5	1.9	50
A0111.003.0155	RNB70-18	18	11/16"	19.0	32.0	26.0	61.0	19.0	13.5	17.5	1.9	50
A0111.003.0156	RNB70-20	20	3/4"	21.0	32.0	26.0	61.0	19.0	13.5	17.5	1.9	50
A0111.003.0157	RNB70-22	22	7/8"	23.0	32.0	26.0	61.0	19.0	13.5	17.5	1.9	50
A0111.003.0158	RNB80-6	6	1/4"	6.4	27.0	20.7	54.2	20.0	15.1	19.5	2.2	50
A0111.003.0159	RNB80-8	8	5/16"	8.4	27.0	20.7	54.2	20.0	15.1	19.5	2.2	50
A0111.003.0160	RNB80-10	10	3/8"	10.5	27.0	20.7	54.2	20.0	15.1	19.5	2.2	50
A0111.003.0161	RNB80-12	12	1/2"	13.0	27.0	20.7	54.2	20.0	15.1	19.5	2.2	50
A0111.003.0162	RNB80-14	14	9/16"	15.0	32.0	32.0	68.0	20.0	15.1	19.5	2.2	50
A0111.003.0163	RNB80-16	16	5/8"	17.0	32.0	32.0	68.0	20.0	15.1	19.5	2.2	50
A0111.003.0164	RNB80-18	18	11/16"	19.0	32.0	32.0	68.0	20.0	15.1	19.5	2.2	50
A0111.003.0165	RNB80-20	20	3/4"	21.0	32.0	32.0	68.0	20.0	15.1	19.5	2.2	50
A0111.003.0166	RNB80-22	22	7/8"	23.0	32.0	32.0	68.0	20.0	15.1	19.5	2.2	50
A0111.003.0167	RNB80-24	24	15/16"	25.0	32.0	32.0	68.0	20.0	15.1	19.5	2.2	50
A0111.003.0168	RNB100-6	6	1/4"	6.4	28.5	20.4	55.6	21.0	17.1	22.1	2.5	25
A0111.003.0169	RNB100-8	8	5/16"	8.4	28.5	20.4	55.6	21.0	17.1	22.1	2.5	25
A0111.003.0170	RNB100-10	10	3/8"	10.5	28.5	20.4	55.6	21.0	17.1	22.1	2.5	25
A0111.003.0171	RNB100-12	12	1/2"	13.0	28.5	20.4	55.6	21.0	17.1	22.1	2.5	25
A0111.003.0172	RRB100-14	14	9/16"	15.0	32.0	32.0	69.0	21.0	17.1	22.1	2.5	25
A0111.003.0173	RNB100-16	16	5/8"	17.0	32.0	32.0	69.0	21.0	17.1	22.1	2.5	25
A0111.003.0174	RNB100-18	18	11/16"	19.0	32.0	32.0	69.0	21.0	17.1	22.1	2.5	25
A0111.003.0175	RNB100-20	20	3/4"	21.0	32.0	32.0	69.0	21.0	17.1	22.1	2.5	25
A0111.003.0176	RNB100-22	22	7/8"	23.0	32.0	32.0	69.0	21.0	17.1	22.1	2.5	25
A0111.003.0177	RNB100-24	24	15/16"	25.0	32.0	32.0	69.0	21.0	17.1	22.1	2.5	25
A0111.003.0178	RNB125-8	8	5/16"	8.4	32.0	22.0	62.0	24.0	18.0	24.0	3.0	25
A0111.003.0179	RNB125-10	10	3/8"	10.5	32.0	22.0	62.0	24.0	18.0	24.0	3.0	25
A0111.003.0180	RNB125-12	12	1/2"	13.0	32.0	22.0	62.0	24.0	18.0	24.0	3.0	25
A0111.003.0181	RNB125-14	14	9/16"	15.0	32.0	32.0	72.0	24.0	18.0	24.0	3.0	25
A0111.003.0182	RNB125-16	16	5/8"	17.0	32.0	32.0	72.0	24.0	18.0	24.0	3.0	25
A0111.003.0183	RNB125-20	20	3/4"	21.0	32.0	32.0	72.0	24.0	18.0	24.0	3.0	25
A0111.003.0184	RNB125-22	22	7/8"	23.0	32.0	32.0	72.0	24.0	18.0	24.0	3.0	25
A0111.003.0185	RNB150-8	8	5/16"	8.4	36.0	21.0	66.0	27.0	20.2	26.6	3.2	25
A0111.003.0186	RNB150-10	10	3/8"	10.5	36.0	21.0	66.0	27.0	20.2	26.6	3.2	25
A0111.003.0187	RNB150-12	12	1/2"	13.0	36.0	21.0	66.0	27.0	20.2	26.6	3.2	25
A0111.003.0188	RNB150-14	14	9/16"	15.0	36.0	21.0	66.0	27.0	20.2	26.6	3.2	25

CE RoHS EASCO® RNB Type Non Insulated Ring Terminal Lugs (圆形裸端头)



Material: Red Copper
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)
		螺柱口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	
货号	型号	Metric	American	包装数 (个)								
A0111.003.0189	RNB150-16	16	5/8"	17.0	36.0	21.0	66.0	27.0	20.2	26.6	3.2	25
A0111.003.0190	RNB150-18	18	11/16"	19.0	36.0	36.0	81.0	27.0	20.2	26.6	3.2	25
A0111.003.0191	RNB150-20	20	3/4"	21.0	36.0	36.0	81.0	27.0	20.2	26.6	3.2	25
A0111.003.0192	RNB150-22	22	7/8"	23.0	36.0	36.0	81.0	27.0	20.2	26.6	3.2	25
A0111.003.0193	RNB150-24	24	15/16"	25.0	36.0	36.0	81.0	27.0	20.2	26.6	3.2	25
A0111.003.0194	RNB150-27	27	1	28.0	36.0	36.0	81.0	27.0	20.2	26.6	3.2	25
A0111.003.0195	RNB180-8	8	5/16"	8.4	38.5	24.5	72.3	28.5	21.6	28.6	3.5	20
A0111.003.0196	RNB180-10	10	3/8"	10.5	38.5	24.5	72.3	28.5	21.6	28.6	3.5	20
A0111.003.0197	RNB180-12	12	1/2"	13.0	38.5	24.5	72.3	28.5	21.6	28.6	3.5	20
A0111.003.0198	RNB180-14	14	9/16"	15.0	38.5	24.5	72.3	28.5	21.6	28.6	3.5	20
A0111.003.0199	RRB180-16	16	5/8"	17.0	38.5	24.5	72.3	28.5	21.6	28.6	3.5	20
A0111.003.0200	RNB180-18	18	11/16"	19.0	38.5	39.0	86.7	28.5	21.6	28.6	3.5	20
A0111.003.0201	RNB180-20	20	3/4"	21.0	38.5	39.0	86.7	28.5	21.6	28.6	3.5	20
A0111.003.0202	RNB180-22	22	7/8"	23.0	38.5	39.0	86.7	28.5	21.6	28.6	3.5	20
A0111.003.0203	RNB180-24	24	15/16"	25.0	38.5	39.0	86.7	28.5	21.6	28.6	3.5	20
A0111.003.0204	RNB180-27	27	1	28.0	38.5	39.0	86.7	28.5	21.6	28.6	3.5	20
A0111.003.0205	RNB200-8	8	15/16"	8.4	44.0	24.5	78.0	31.5	24.8	32.6	3.9	10
A0111.003.0206	RNB200-10	10	3/8"	10.5	44.0	24.5	78.0	31.5	24.8	32.6	3.9	10
A0111.003.0207	RNB200-12	12	1/2"	13.0	44.0	24.5	78.0	31.5	24.8	32.6	3.9	10
A0111.003.0208	RNB200-14	14	9/16"	15.0	44.0	24.5	78.0	31.5	24.8	32.6	3.9	10
A0111.003.0209	RNB200-16	16	5/8"	17.0	44.0	24.5	78.0	31.5	24.8	32.6	3.9	10
A0111.003.0210	RNB200-18	18	11/16"	19.0	44.0	37.5	91.0	31.5	24.8	32.6	3.9	10
A0111.003.0211	RNB200-20	20	3/4"	21.0	44.0	37.5	91.0	31.5	24.8	32.6	3.9	10
A0111.003.0212	RNB200-22	22	7/8"	23.0	44.0	37.5	91.0	31.5	24.8	32.6	3.9	10
A0111.003.0213	RNB200-24	24	15/16"	25.0	44.0	37.5	91.0	31.5	24.8	32.6	3.9	10
A0111.003.0214	RNB200-27	27	1	28.0	44.0	37.5	91.0	31.5	24.8	32.6	3.9	10
A0111.003.0215	RNB325-8	8	5/16"	8.4	50.5	33.5	94.3	35.5	28.7	37.1	4.2	5
A0111.003.0216	RNB325-10	10	3/8"	10.5	50.5	33.5	94.3	35.5	28.7	37.1	4.2	5
A0111.003.0217	RNB325-12	12	1/2"	13.0	50.5	33.5	94.3	35.5	28.7	37.1	4.2	5
A0111.003.0218	RNB325-14	14	9-16"	15.0	50.5	33.5	94.3	35.5	28.7	37.1	4.2	5
A0111.003.0219	RNB325-16	16	5/8"	17.0	50.5	33.5	94.3	35.5	28.7	37.1	4.2	5
A0111.003.0220	RNB325-18	18	11/16"	19.0	50.5	45.0	105.7	35.5	28.7	37.1	4.2	5
A0111.003.0221	RNB325-20	20	3/4"	21.0	50.5	45.0	105.7	35.5	28.7	37.1	4.2	5
A0111.003.0222	RNB325-22	22	7/8"	23.0	50.5	45.0	105.7	35.5	28.7	37.1	4.2	5
A0111.003.0223	RNB325-24	24	15/16"	25.0	50.5	45.0	105.7	35.5	28.7	37.1	4.2	5
A0111.003.0224	RNB325-27	27	1	28.0	50.5	45.0	105.7	35.5	28.7	37.1	4.2	5

CE RoHS EASCO® RV Type Insulated Ring Terminal Lugs (圆形预绝缘端子)



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T			
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数(个)	颜色	
A0111.004.0001	RV1.25-3.2	3	#4	3.2	5.7	4.95	17.8	10.5	1.7	4.2	0.7	1000	Red 红色	
A0111.004.0002	RV1.25-3.5S	3.5	#6	3.7	5.7	4.95	17.8	10.5	1.7	4.2	0.7	1000		
A0111.004.0003	RV1.25-3.5M	3.5	#6	3.7	6.6	6.3	19.6	10.5	1.7	4.2	0.7	1000		
A0111.004.0004	RV1.25-3.5L	3.5	#6	3.7	8.0	7.0	21.0	10.5	1.7	4.2	0.7	1000		
A0111.004.0005	RV1.25-4S	4	#8	4.3	6.6	6.3	19.6	10.5	1.7	4.2	0.7	1000		
A0111.004.0006	RV1.25-4L	4	#8	4.3	8.0	7.0	21.0	10.5	1.7	4.2	0.7	1000		
A0111.004.0007	RV1.25-5	5	#10	5.3	8.0	7.0	21.0	10.5	1.7	4.2	0.7	1000		
A0111.004.0008	RV1.25-5L	5	#10	5.3	9.8	8.3	23.5	10.5	1.7	4.2	0.7	1000		
A0111.004.0009	RV1.25-6S	6	1/4"	6.4	9.8	8.3	23.5	10.5	1.7	4.2	0.7	1000		
A0111.004.0010	RV1.25-6	6	1/4"	6.4	11.6	11.2	27.4	10.5	1.7	4.2	0.7	1000		
A0111.004.0011	RV1.25-8	8	5/16"	8.4	11.6	11.2	27.4	10.5	1.7	4.2	0.7	1000		
A0111.004.0012	RV1.25-8L	8	5/16"	8.4	13.6	13.9	27.4	10.5	1.7	4.2	0.7	1000		
A0111.004.0013	RV1.25-10	10	3/8"	10.5	13.6	13.9	30.7	10.5	1.7	4.2	0.7	1000		
A0111.004.0014	RV1.25-10L	10	3/8"	10.5	13.6	13.9	30.7	10.5	1.7	4.2	0.7	1000		
A0111.004.0015	RV1.25-12	12	1/2"	13.0	19.2	16.0	36.5	10.5	1.7	4.2	0.7	1000		
A0111.004.0016	RV2-3.2	3	#4	3.2	6.6	4.3	17.9	10.5	2.3	4.7	0.8	1000	Blue 蓝色	
A0111.004.0017	RV2-3.5S	3.5	#6	3.7	6.6	4.3	17.9	10.5	2.3	4.7	0.8	1000		
A0111.004.0018	RV2-3.5M	3.5	#6	3.7	6.6	6.3	20.6	10.5	2.3	4.7	0.8	1000		
A0111.004.0019	RV2-3.5L	3.5	#6	3.7	8.5	7.75	22.0	10.5	2.3	4.7	0.8	1000		
A0111.004.0020	RV2-4S	4	#8	4.3	6.6	6.3	20.5	10.5	2.3	4.7	0.8	1000		
A0111.004.0021	RV2-4L	4	#8	4.3	8.5	7.5	22.0	10.5	2.3	4.7	0.8	1000		
A0111.004.0022	RV2-5S	5	#10	5.3	8.5	7.5	22.0	10.5	2.3	4.7	0.8	1000		
A0111.004.0023	RV2-5L	5	#10	5.3	9.5	7.4	22.3	10.5	2.3	4.7	0.8	1000		
A0111.004.0024	RV2-6S	6	1/4"	6.4	9.5	7.4	22.3	10.5	2.3	4.7	0.8	1000		
A0111.004.0025	RV2-6	6	1/4"	6.4	12.0	11.0	27.0	10.5	2.3	4.7	0.8	1000		
A0111.004.0026	RV2-8	8	5/16"	8.4	12.0	11.0	27.0	10.5	2.3	4.7	0.8	1000		
A0111.004.0027	RV2-10	10	3/8"	10.5	13.6	13.9	31.5	10.5	2.3	4.7	0.8	1000		
A0111.004.0028	RV2-10L	10	3/8"	10.5	19.2	16.6	31.5	10.5	2.3	4.7	0.8	1000		
A0111.004.0029	RV2-12	12	1/2"	13.0	19.2	16.6	36.5	10.5	2.3	4.7	0.8	500	Black 黑色	
A0111.004.0030	RV3.5-3	3	#4	3.2	8.0	8.0	36.5	13.0	2.9	6.2	1.0	500		
A0111.004.0031	RV3.5-4	4	#8	4.3	8.0	8.0	24.7	13.0	2.9	6.2	1.0	500		
A0111.004.0032	RV3.5-4L	4	#8	4.3	9.5	8.5	26.2	13.0	2.9	6.2	1.0	500		
A0111.004.0033	RV3.5-5S	5	#10	5.3	8.0	8.0	25.7	13.0	2.9	6.2	1.0	500		
A0111.004.0034	RV3.5-5L	5	#10	5.3	12.1	9.4	28.4	13.0	2.9	6.2	1.0	500		
A0111.004.0035	RV3.5-6	6	1/4"	6.4	12.0	9.4	28.4	13.0	2.9	6.2	1.0	500	Yellow 黄色	
A0111.004.0036	RV3.5-8	8	5/16"	8.4	15.0	13.7	34.0	13.0	2.9	6.2	1.0	500		
A0111.004.0037	RV3.5-10	10	3/8"	10.5	15.0	13.7	34.2	13.0	2.9	6.2	1.0	500		
A0111.004.0038	RV5.5-3.5	3.5	#6	3.7	7.2	5.9	22.5	13.0	3.4	6.5	1.0	500		
A0111.004.0039	RV5.5-4S	4	#8	4.3	7.2	5.9	22.5	13.0	3.4	6.5	1.0	500		
A0111.004.0040	RV5.5-4L	4	#8	4.3	9.5	8.3	26.6	13.0	3.4	6.5	1.0	500		
A0111.004.0041	RV5.5-5	5	#10	5.3	9.5	8.3	26.6	13.0	3.4	6.5	1.0	500	Yellow 黄色	
A0111.004.0042	RV5.5-6	6	1/4"	6.4	12.0	10.5	29.5	13.0	3.4	6.5	1.0	500		
A0111.004.0043	RV5.5-6L	6	1/4"	6.4	12.0	13.0	32	13.0	3.4	6.5	1.0	500		
A0111.004.0044	RV5.5-8	8	5/16"	8.4	15.0	13.5	34.0	13.0	3.4	6.5	1.0	500		
A0111.004.0045	RV5.5-10	10	3/8"	10.5	15.0	13.5	34.0	13.0	3.4	6.5	1.0	500		
A0111.004.0046	RV5.5-12	12	1/2"	13.0	19.2	16.0	38.6	13.0	3.4	6.5	1.0	500		

CE RoHS EASCO® RV Type Insulated Ring Terminal Lugs (圆形预绝缘端子)



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T			
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数(个)	颜色	
A0111.004.0047	RV8-4	4.0	#8	4.3	8.8	10.9	33.0	17.5	4.7	8.0	1.2	500	Red 红色	
A0111.004.0048	RV8-4L	4.0	#8	4.3	12.0	12.0	33.0	17.5	4.7	8.0	1.2	500		
A0111.004.0049	RV8-5S	5.0	#10	5.3	8.8	10.9	32.5	17.5	4.7	8.0	1.2	500		
A0111.004.0050	RV8-5M	5.0	#10	5.3	12.0	9.3	32.5	17.5	4.7	8.0	1.2	500		
A0111.004.0051	RV8-5L	5.0	#10	5.3	15.0	13.8	37.3	17.5	4.7	8.0	1.2	500		
A0111.004.0052	RV8-6S	6.0	1/4"	6.4	12.0	9.3	32.8	17.5	4.7	8.0	1.2	500		
A0111.004.0053	RV8-6L	6.0	1/4"	6.4	15.0	13.8	32.8	17.5	4.7	8.0	1.2	500		
A0111.004.0054	RV8-8	8	5/16"	8.4	15.0	13.8	38.7	17.5	4.7	8.0	1.2	500		
A0111.004.0055	RV8-10	10	3/8"	10.5	15.0	13.8	38.7	17.5	4.7	8.0	1.2	500		
A0111.004.0056	RV8-12	12	1/2"	13.0	20.0	15.0	42.3	17.5	4.7	8.0	1.2	500		
A0111.004.0057	RV14-4	4	#8	4.3	12.0	13.3	41.8	22.5	5.4	11.0	1.4	200	Blue 蓝色	
A0111.004.0058	RV14-5	5	#10	5.3	12.0	13.3	41.8	22.5	5.4	11.0	1.4	200		
A0111.004.0059	RV14-6S	6	1/4"	6.4	12.0	13.3	41.8	22.5	5.4	11.0	1.4	200		
A0111.004.0060	RV14-6L	6	1/4"	6.4	16.0	14.3	41.8	22.5	5.4	11.0	1.4	200		
A0111.004.0061	RV14-8	8	5/16"	8.4	16.0	14.3	45.5	22.5	5.4	11.0	1.4	200		
A0111.004.0062	RV14-10	10	3/8"	10.5	16.0	14.3	45.5	22.5	5.4	11.0	1.4	200		
A0111.004.0063	RV14-12	12	1/2"	13.0	22.0	19.5	53.0	22.5	5.4	11.0	1.4	200		
A0111.004.0064	RV22-5S	5	#10	5.3	12.2	15.1	44.7	24.5	7.7	13.0	1.8	100		Yellow 黄色
A0111.004.0065	RV22-5L	5	#10	5.3	16.5	13.5	44.7	24.5	7.7	13.0	1.8	100		
A0111.004.0066	RV22-6S	6	1/4"	6.4	12.2	15.1	44.7	24.5	7.7	13.0	1.8	100		
A0111.004.0067	RV22-8	8	5/16"	8.4	16.5	13.5	45.2	24.5	7.7	13.0	1.8	100		
A0111.004.0068	RV22-10	10	3/8"	10.5	16.5	13.5	45.2	24.5	7.7	13.0	1.8	100		
A0111.004.0069	RV22-12	12	1/2"	13.0	22.0	19.5	54.0	24.5	7.7	13.0	1.8	100		
A0111.004.0070	RV38-5	5	#10	5.3	15.3	17.4	52.0	27.0	9.4	14.5	1.8	50	Red 红色	
A0111.004.0071	RV38-6S	6	1/4"	6.4	15.3	17.4	52.0	27.0	9.4	14.5	1.8	50		
A0111.004.0072	RV38-6L	6	1/4"	6.4	22.0	17.4	52.0	27.0	9.4	14.5	1.8	50		
A0111.004.0073	RV38-8S	8	5/16"	8.4	15.3	17.4	52.0	27.0	9.4	14.5	1.8	50		
A0111.004.0074	RV38-8L	8	5/16"	8.4	22.0	17.7	52.0	27.0	9.4	14.5	1.8	50		
A0111.004.0075	RV38-10S	10	3/8"	10.5	15.3	17.4	52.0	27.0	9.4	14.5	1.8	50		
A0111.004.0076	RV38-10L	12	1/2"	13.0	22.0	17.7	52.0	27.0	9.4	14.5	1.8	50		
A0111.004.0077	RV38-12	12	1/2"	13.0	22.0	17.7	55.7	27.0	9.4	14.5	1.8	50		

CE RoHS EASCO® RNY Type Nylon Insulated Ring Terminal Lugs (尼龙圆形预绝缘端头)



Material: Red Copper with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜, 尼龙
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T			
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数 (个)	颜色	
A0111.005.0001	RNY1.25-3.2	3	#4	3.2	5.7	4.95	18.8	11.0	1.7	4.3	0.7	1000	Red 红色	
A0111.005.0002	RNY1.25-3.5S	3.5	#6	3.7	5.7	4.95	18.8	11.0	1.7	4.3	0.7	1000		
A0111.005.0003	RNY1.25-3.5M	3.5	#6	3.7	6.6	6.3	20.6	11.0	1.7	4.3	0.7	1000		
A0111.005.0004	RNY1.25-3.5L	3.5	#6	3.7	8.0	7.0	22.0	11.0	1.7	4.3	0.7	1000		
A0111.005.0005	RNY1.25-4S	4	#8	4.3	6.6	6.3	20.6	11.0	1.7	4.3	0.7	1000		
A0111.005.0006	RNY1.25-4L	4	#8	4.3	8.0	7.0	22.0	11.0	1.7	4.3	0.7	1000		
A0111.005.0007	RNY1.25-5	5	#10	5.3	8.0	7.0	22.0	11.0	1.7	4.3	0.7	1000		
A0111.005.0008	RNY1.25-5L	5	#10	5.3	9.8	8.3	23.3	11.0	1.7	4.3	0.7	1000		
A0111.005.0009	RNY1.25-6S	6	1/4"	6.4	9.8	8.3	23.3	11.0	1.7	4.3	0.7	1000		
A0111.005.0010	RNY 1.25-6	6	1/4"	6.4	11.6	11.2	28.0	11.0	1.7	4.3	0.7	1000		
A0111.005.0011	RNY1.25-8	8	5/16"	8.4	11.6	11.2	28.0	11.0	1.7	4.3	0.7	1000	Blue 蓝色	
A0111.005.0012	RNY1.25-10	10	3/8"	10.5	13.6	13.9	31.7	11.0	1.7	4.3	0.7	1000		
A0111.005.0013	RNY1.25-12	12	1/2"	13.0	19.2	16.0	37.6	11.0	1.7	4.3	0.7	1000		
A0111.005.0014	RNY2-3.2	3	#4	3.2	6.6	4.2	20.7	11.0	2.3	4.8	0.8	1000		
A0111.005.0015	RNY2-3.5	3.5	#6	3.7	6.6	4.2	20.7	11.0	2.3	4.8	0.8	1000		
A0111.005.0016	RNY2-3.5M	3.5	#6	3.7	6.6	6.3	22.2	11.0	2.3	4.8	0.8	1000		
A0111.005.0017	RNY2-3.5L	3.5	#6	3.7	8.5	7.75	23.0	11.0	2.3	4.8	0.8	1000		
A0111.005.0018	RNY2-4S	4	#8	4.3	6.6	7.9	22.2	11.0	2.3	4.8	0.8	1000		
A0111.005.0019	RNY2-4L	4	#8	4.3	8.5	7.5	23.0	11.0	2.3	4.8	0.8	1000		
A0111.005.0020	RNY2-5S	5	#10	5.3	8.5	7.5	23.0	11.0	2.3	4.8	0.8	1000		
A0111.005.0021	RNY2-5L	5	#10	5.3	9.5	7.4	23.3	11.0	2.3	4.8	0.8	1000	Black 黑色	
A0111.005.0022	RNY2-6	6	1/4"	6.4	12.0	11.0	28.0	11.0	2.3	4.8	0.8	1000		
A0111.005.0023	RNY2-8	8	5/16"	8.4	12.0	11.0	28.0	11.0	2.3	4.8	0.8	1000		
A0111.005.0024	RNY2-10	10	3/8"	10.5	13.6	13.9	31.7	11.0	2.3	4.8	0.8	1000		
A0111.005.0025	RNY2-12	12	1/2"	13.0	19.2	16.6	36.6	11.0	2.3	4.8	0.8	1000		
A0111.005.0026	RNY3.5-3	3	#4	3.2	8.0	8.0	36.6	13.0	2.9	6.2	1.0	500		
A0111.005.0027	RNY3.5-4	4	#8	4.3	8.0	8.0	24.7	13.0	2.9	6.2	1.0	500		
A0111.005.0028	RNY3.5-4L	4	#8	4.3	9.5	8.5	26.2	13.0	2.9	6.2	1.0	500		
A0111.005.0029	RNY3.5-5S	5	#10	5.3	8.0	8.0	25.7	13.0	2.9	6.2	1.0	500		
A0111.005.0030	RNY3.5-5L	5	#10	5.3	12.1	9.4	28.4	13.0	2.9	6.2	1.0	500		
A0111.005.0031	RNY 3.5-6	6	1/4"	6.4	12.0	9.4	28.4	13.0	2.9	6.2	1.0	500	Yellow 黄色	
A0111.005.0032	RNY3.5-8	8	5/16"	8.4	15.0	13.7	34.0	13.0	2.9	6.2	1.0	500		
A0111.005.0033	RNY3.5-10	10	3/8"	10.5	15.0	13.7	34.2	13.0	2.9	6.2	1.0	500		
A0111.005.0034	RNY5.5-3.5	3.5	#6	3.7	7.2	5.9	22.5	13.0	3.4	6.7	1.0	500		
A0111.005.0035	RNY5.5-4S	4	#8	4.3	7.2	5.9	22.5	13.0	3.4	6.7	1.0	500		
A0111.005.0036	RNY5.JL	4	#8	4.3	9.5	8.3	26.6	13.0	3.4	6.7	1.0	500		
A0111.005.0037	RNY5.5-5	5	#10	5.3	9.5	8.3	26.6	13.0	3.4	6.7	1.0	500		
A0111.005.0038	RNY5.5-6	6	1/4"	6.4	12.0	10.5	29.5	13.0	3.4	6.7	1.0	500		
A0111.005.0039	RNY5.5-8	8	5/16"	8.4	15.0	13.5	34.0	13.0	3.4	6.7	1.0	500		
A0111.005.0040	RNY5.5-10	10	3/8"	10.5	15.0	13.5	34.0	13.0	3.4	6.7	1.0	500		
A0111.005.0041	RNY5.5-12	12	1/2"	13.0	19.2	16.0	38.6	13.0	3.4	6.7	1.0	500	Red 红色	
A0111.005.0042	RNYB8-4S	4.0	#8	4.3	8.8	10.9	29.3	16.0	4.5	8.0	1.2	500		
A0111.005.0043	RNYB8-4	4.0	#8	4.3	8.8	10.9	29.3	16.0	4.5	8.0	1.2	500		
A0111.005.0044	RNYB8-5S	5.0	#10	5.3	8.8	10.9	29.7	16.0	4.5	8.0	1.2	500		
A0111.005.0045	RNYB8-5M	5.0	#10	5.3	12.0	9.3	31.3	16.0	4.5	8.0	1.2	500		
A0111.005.0046	RNYB8-5L	5.0	#10	5.3	15.0	13.8	37.3	16.0	4.5	8.0	1.2	500		

CE RoHS EASCO® RNY Type Nylon Insulated Ring Terminal Lugs (尼龙圆形预绝缘端头)



Material: Red Copper with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜, 尼龙
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T		
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数 (个)	颜色
A0111.005.0047	RNYB8-6S	6.0	1/4"	6.4	12.0	9.3	31.3	16.0	4.5	8.0	1.2	500	Red 红色
A0111.005.0048	RNYB8-8	8	5/16"	8.4	15.0	13.8	37.3	16.0	4.5	8.0	1.2	500	
A0111.005.0049	RNYB8-10	10	3/8"	10.5	15.0	13.8	37.3	16.0	4.5	8.0	1.2	500	
A0111.005.0050	RNYB8-12	12	1/2"	13.0	20.0	15.0	41.0	16.0	4.5	8.0	1.2	500	Blue 蓝色
A0111.005.0051	RNYB14-4	4	#8	4.3	12.0	13.3	40.8	21.5	5.4	11.0	1.4	200	
A0111.005.0052	RNYB14-5	5	#10	5.3	12.0	13.3	40.8	21.5	5.4	11.0	1.4	200	
A0111.005.0053	RNYB14-6S	6	1/4"	6.4	12.0	13.3	40.8	21.5	5.4	11.0	1.4	200	
A0111.005.0054	RNYB14-8	8	5/16"	8.4	16.0	14.3	43.5	21.5	5.4	11.0	1.4	200	
A0111.005.0055	RNYB14-10	10	3/8"	10.5	16.0	14.3	43.5	21.5	5.4	11.0	1.4	200	
A0111.005.0056	RNYB14-12	12	1/2"	13.0	22.0	19.5	52.0	21.5	5.4	11.0	1.4	200	Yellow 黄色
A0111.005.0057	RNYB22-5S	5	#10	5.3	12.2	15.1	44.7	23.5	7.7	13.0	1.8	100	
A0111.005.0058	RNYB22-6S	6	1/4"	6.4	12.2	15.1	44.7	23.5	7.7	13.0	1.8	100	
A0111.005.0059	RNYB22-8	8	5/16"	8.4	16.5	13.5	45.2	23.5	7.7	13.0	1.8	100	
A0111.005.0060	RNYB22-10	10	3/8"	10.5	16.5	13.5	45.2	23.5	7.7	13.0	1.8	100	Red 红色
A0111.005.0061	RNYB22-12	12	1/2"	13.0	22.0	19.5	54.0	23.5	7.7	13.0	1.8	100	
A0111.005.0062	RNYB38-5	5	#10	5.3	15.3	17.4	52.0	27.0	9.4	14.5	1.8	50	
A0111.005.0063	RNYB38-6S	6	1/4"	6.4	15.3	17.4	52.0	27.0	9.4	14.5	1.8	50	
A0111.005.0064	RNYB38-8S	8	5/16"	8.4	15.3	17.4	52.0	27.0	9.4	14.5	1.8	50	
A0111.005.0065	RNYB38-10S	10	3/8"	10.5	15.3	17.4	52.0	27.0	9.4	14.5	1.8	50	
A0111.005.0066	RNYB38-12	12	1/2"	13.0	22.0	17.7	55.7	27.0	9.4	14.5	1.8	50	

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS EASCO® RHB Type Insulated Ring Terminal Lugs (Heat Shrink Type) EASCO® 圆形预绝缘端头(热收缩型)



Material: Red Copper with PE insulation.
Plating Material: Tin plating.
Working Temperature: -55°C~+125°C
Heat Shrinkable Temp.: +80°C
Fully Shrinkable Min. Temp.: +130°C
材质: 紫铜, 聚乙烯
表面镀层: 镀锡
操作温度: -55°C~125°C
开始收缩温度: 80°C
最低完全收缩温度: 130°C




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺柱口直径	美制螺旋栓号	d2	W	F	L	H	d1	D	T	包装数(个)		
A0111.006.0001	RHB1.25-3.2	3	#4	3.2	5.7	4.95	26.8	19	1.7	4.8	0.7	1000	Red 红色	
A0111.006.0002	RHB1.25-3.5S	3.5	#6	3.7	5.7	4.95	26.8	19	1.7	4.8	0.7	1000		
A0111.006.0003	RHB1.25-3.5M	3.5	#6	3.7	6.6	6.3	28.8	19	1.7	4.8	0.7	1000		
A0111.006.0004	RHB1.25-3.5L	3.5	#6	3.7	8.0	7.0	30	19	1.7	4.8	0.7	1000		
A0111.006.0005	RHB1.25-4S	4	#8	4.3	6.6	6.3	28.6	19	1.7	4.8	0.7	1000		
A0111.006.0006	RHB1.25-4L	4	#8	4.3	8.0	7.0	30	19	1.7	4.8	0.7	1000		
A0111.006.0007	RHB1.25-5	5	#10	5.3	8.0	7.0	30	19	1.7	4.8	0.7	1000		
A0111.006.0008	RHB1.25-5L	5	#10	5.3	9.8	8.3	31.3	19	1.7	4.8	0.7	1000		
A0111.006.0009	RHB1.25-6S	6	1/4"	6.4	9.8	8.3	31.3	19	1.7	4.8	0.7	1000		
A0111.006.0010	RHB1.25-6	6	1/4"	6.4	11.6	11.2	36	19	1.7	4.8	0.7	1000		
A0111.006.0011	RHB1.25-8	8	5/16"	8.4	11.6	11.2	36	19	1.7	4.8	0.7	1000	Blue 蓝色	
A0111.006.0012	RHB1.25-10	10	3/8"	10.5	13.6	13.9	39.7	19	1.7	4.8	0.7	1000		
A0111.006.0013	RHB1.25-12	12	1/2"	13.0	19.2	16.6	44.6	19	1.7	4.8	0.7	500		
A0111.006.0014	RHB2-3.2	3	#4	3.2	6.6	4.2	28.7	19	2.3	5.8	0.8	1000		
A0111.006.0015	RHB2-3.5	3.5	#6	3.7	6.6	4.2	28.7	19	2.3	5.8	0.8	1000		
A0111.006.0016	RHB2-3.5M	3.5	#6	3.7	6.6	6.3	21.2	19	2.3	5.8	0.8	1000		
A0111.006.0017	RHB2-3.5L	3.5	#6	3.7	8.5	7.75	31	19	2.3	5.8	0.8	1000		
A0111.006.0018	RHB2-4S	4	#8	4.3	6.6	6.3	30.2	19	2.3	5.8	0.8	1000		
A0111.006.0019	RHB2-4L	4	#8	4.3	8.5	7.5	31.0	19	2.3	5.8	0.8	1000		
A0111.006.0020	RHB2-5S	5	#10	5.3	8.5	7.5	31.0	19	2.3	5.8	0.8	1000		
A0111.006.0021	RHB2-5L	5	#10	5.3	9.5	7.4	31.3	19	2.3	5.8	0.8	1000		
A0111.006.0022	RHB2-6S	6	1/4"	6.4	9.5	7.4	31.3	19	2.3	5.8	0.8	1000	Yellow 黄色	
A0111.006.0023	RHB2-6	6	1/4"	6.4	12.0	11.0	36.0	19	2.3	5.8	0.8	1000		
A0111.006.0024	RHB2-8	8	5/16"	8.4	12.0	11.0	36.0	19	2.3	5.8	0.8	1000		
A0111.006.0025	RHB2-10	10	3/8"	10.5	13.6	13.9	39.7	19	2.3	5.8	0.8	1000		
A0111.006.0026	RHB2-12	12	1/2"	13.0	19.2	16.6	44.6	19	2.3	5.8	0.8	500		
A0111.006.0027	RHB5.5-4L	4	#8	4.3	9.5	8.3	35.6	22	3.4	6.8	1.0	500		
A0111.006.0028	RHB5.5-5	5	#10	5.3	9.5	8.3	35.6	22	3.4	6.8	1.0	500		
A0111.006.0029	RHB5.5-6	6	1/4"	6.4	12.0	10.5	38.5	22	3.4	6.8	1.0	500		
A0111.006.0030	RHB5.5-6L	6	1/4"	6.4	12.0	13.0	41	22	3.4	6.8	1.0	500		
A0111.006.0031	RHB5.5-8	8	5/16"	8.4	15.0	13.5	43	22	3.4	6.8	1.0	500		
A0111.006.0032	RHB5.5-10	10	3/8"	10.5	15.0	13.5	43	22	3.4	6.8	1.0	500		
A0111.006.0033	RHB5.5-12	12	1/2"	13.0	19.2	16.0	47.6	22	3.4	6.8	1.0	500		

CE RoHS EASCO® RV Type Insulated Ring Terminal Lugs (Double Crimp) EASCO® 双压接式圆形预绝缘端头



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V
 Double Crimp: With copper shiled.
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V
 双压接: 带有铜套



Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)	Color
		螺柱口直径	美制螺旋控号	d2	W	F	L	H	d1	D	T		
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数(个)	颜色
A0111.007.0001	RVD1.25-3.2	3	#4	3.2	5.7	4.95	17.8	10.0	1.7	4.5	0.7	1000	Red 红色
A0111.007.0002	RVD1.25-3.5S	3.5	#6	3.7	5.7	4.95	17.8	10.0	1.7	4.5	0.7	1000	
A0111.007.0003	RVD1.25-3.5M	3.5	#6	3.7	6.6	6.3	19.6	10.0	1.7	4.5	0.7	1000	
A0111.007.0004	RVD1.25-3.5L	3.5	#6	3.7	8.0	7.0	21.0	10.0	1.7	4.5	0.7	1000	
A0111.007.0005	RVD1.25-4S	4	#8	4.3	6.6	6.3	19.6	10.0	1.7	4.5	0.7	1000	
A0111.007.0006	RVD1.25-4L	4	#8	4.3	8.0	7.0	21.0	10.0	1.7	4.5	0.7	1000	
A0111.007.0007	RVD1.25-5	5	#10	5.3	8.0	7.0	21.0	10.0	1.7	4.5	0.7	1000	
A0111.007.0008	RVD1.25-5L	5	#10	5.3	9.8	8.3	22.3	10.0	1.7	4.5	0.7	1000	
A0111.007.0009	RVD1.25-6	6	1/4"	6.4	11.6	11.2	27.0	10.0	1.7	4.5	0.7	1000	
A0111.007.0010	RVD1.25-8	8	5/16"	8.4	11.6	11.2	27.0	10.0	1.7	4.5	0.7	1000	
A0111.007.0011	RVD1.25-10	10	3/8"	10.5	13.6	13.9	30.7	10.0	1.7	4.5	0.7	1000	
A0111.007.0012	RVD1.25-12	12	1/2"	13.0	19.2	16.6	35.6	10.0	1.7	4.5	0.7	1000	
A0111.007.0013	RVD2-3.2	3	#4	3.2	6.6	4.2	19.7	10.0	2.3	5.0	0.8	1000	Blue 蓝色
A0111.007.0014	RVD2-3.5S	3.5	#6	3.7	6.6	4.2	19.7	10.0	2.3	5.0	0.8	1000	
A0111.007.0015	RVD2-3.5M	3.5	#6	3.7	6.6	6.3	21.2	10.0	2.3	5.0	0.8	1000	
A0111.007.0016	RVD2-3.5L	3.5	#6	3.7	8.5	7.75	22.0	10.0	2.3	5.0	0.8	1000	
A0111.007.0017	RVD2-4S	4	#8	4.3	6.6	6.3	21.2	10.0	2.3	5.0	0.8	1000	
A0111.007.0018	RVD2-4L	4	#8	4.3	8.5	7.5	22.0	10.0	2.3	5.0	0.8	1000	
A0111.007.0019	RVD2-5S	5	#10	5.3	8.5	7.5	22.0	10.0	2.3	5.0	0.8	1000	
A0111.007.0020	RVD2-5L	5	#10	5.3	9.5	7.4	22.3	10.0	2.3	5.0	0.8	1000	
A0111.007.0021	RVD2-6	6	1/4"	6.4	12.0	11.0	27.0	10.0	2.3	5.0	0.8	1000	
A0111.007.0022	RVD2-8	8	5/16"	8.4	12.0	11.0	27.0	10.0	2.3	5.0	0.8	1000	
A0111.007.0023	RVD2-10	10	3/8"	10.5	13.6	13.9	30.7	10.0	2.3	5.0	0.8	1000	
A0111.007.0024	RVD2-12	12	1/2"	13.0	19.2	16.6	35.6	10.0	2.3	5.0	0.8	1000	
A0111.007.0025	RVD5.5-3.5	3.5	#6	3.7	7.2	5.9	22.5	13.0	3.4	6.7	1.0	500	Yellow 黄色
A0111.007.0026	RVD5.5-4S	4	#8	4.3	7.2	5.9	22.5	13.0	3.4	6.7	1.0	500	
A0111.007.0027	RVD5.5-4L	4	#8	4.3	9.5	8.3	26.6	13.0	3.4	6.7	1.0	500	
A0111.007.0028	RVD5.5-5	5	#10	5.3	9.5	8.3	26.6	13.0	3.4	6.7	1.0	500	
A0111.007.0029	RVD5.5-6	6	1/4"	6.4	12.0	10.5	29.5	13.0	3.4	6.7	1.0	500	
A0111.007.0030	RVD5.5-8	8	5/16"	8.4	15.0	13.5	34.0	13.0	3.4	6.7	1.0	500	
A0111.007.0031	RVD5.5-10	10	3/8"	10.5	15.0	13.5	34.0	13.0	3.4	6.7	1.0	500	
A0111.007.0032	RVD5.5-12	12	1/2"	13.0	19.2	16.0	38.6	13.0	3.4	6.7	1.0	500	


- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS

EASCO® RE Type Insulated Ring Terminal Lugs (Easy Entry) EASCO® 圆形预绝缘端头(易进线型)



Material: Red Copper with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V
材质: 紫铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	包装数(个)		
		Metric	American	d2	W	F	L	H	d1	D	T	包装数(个)	颜色	
A0111.008.0001	RVE 1.25-3.2	3	#4	3.2	5.7	4.95	17.8	10.0	1.7	4.2	0.7	1000	Red 红色	
A0111.008.0002	RVE1.25-3.5S	3.5	#6	3.7	5.7	4.95	17.8	10.0	1.7	4.2	0.7	1000		
A0111.008.0003	RVE1.25-3.5M	3.5	#6	3.7	6.6	6.3	19.6	10.0	1.7	4.2	0.7	1000		
A0111.008.0004	RVE1.25-3.5L	3.5	#6	3.7	8.0	7.0	21.0	10.0	1.7	4.2	0.7	1000		
A0111.008.0005	RVE1.25-4S	4	#8	4.3	6.6	6.3	19.6	10.0	1.7	4.2	0.7	1000		
A0111.008.0006	RVE1.25-4L	4	#8	4.3	8.0	7.0	21.0	10.0	1.7	4.2	0.7	1000		
A0111.008.0007	RVE 1.25-5	5	#10	5.3	8.0	7.0	21.0	10.0	1.7	4.2	0.7	1000		
A0111.008.0008	RVE1.25-5L	5	#10	5.3	9.8	8.3	22.3	10.0	1.7	4.2	0.7	1000		
A0111.008.0009	RVE1.25-6S	6	1/4"	6.4	9.8	8.3	22.3	10.0	1.7	4.2	0.7	1000		
A0111.008.0010	RVE1.25-6	6	1/4"	6.4	11.6	11.2	27.0	10.0	1.7	4.2	0.7	1000		
A0111.008.0011	RVE1.25-8	8	5/16"	8.4	11.6	11.2	27.0	10.0	1.7	4.2	0.7	1000		
A0111.008.0012	RVE1.25-10	10	3/8"	10.5	13.6	13.9	30.7	10.0	1.7	4.2	0.7	1000		
A0111.008.0013	RVE1.25-12	12	1/2"	13.0	19.2	16.6	35.6	10.0	1.7	4.2	0.7	500		
A0111.008.0014	RVE2-3.2	3	#4	3.2	6.6	4.3	17.9	10.0	2.3	4.7	0.8	1000	Blue 蓝色	
A0111.008.0015	RVE2-3.5S	3.5	#6	3.7	6.6	4.3	17.9	10.0	2.3	4.7	0.8	1000		
A0111.008.0016	RVE2-3.5M	3.5	#6	3.7	6.6	6.3	21.2	10.0	2.3	4.7	0.8	1000		
A0111.008.0017	RVE2-3.5L	3.5	#6	3.7	8.5	7.75	22.0	10.0	2.3	4.7	0.8	1000		
A0111.008.0018	RVE2-4S	4	#8	4.3	6.6	6.3	21.2	10.0	2.3	4.7	0.8	1000		
A0111.008.0019	RVE2-4L	4	#8	4.3	8.5	7.5	22.0	10.0	2.3	4.7	0.8	1000		
A0111.008.0020	RVE2-5S	5	#10	5.3	8.5	7.5	22.0	10.0	2.3	4.7	0.8	1000		
A0111.008.0021	RVE2-5L	5	#10	5.3	9.5	7.4	22.3	10.0	2.3	4.7	0.8	1000		
A0111.008.0022	RVE2-6S	6	1/4"	6.4	9.5	7.4	22.3	10.0	2.3	4.7	0.8	1000		
A0111.008.0023	RVE2-6	6	1/4"	6.4	12.0	11.0	27.0	10.0	2.3	4.7	0.8	1000		
A0111.008.0024	RVE2-8	8	5/16"	8.4	12.0	11.0	27.0	10.0	2.3	4.7	0.8	1000		
A0111.008.0025	RVE2-10	10	3/8"	10.5	13.6	13.9	30.7	10.0	2.3	4.7	0.8	1000		
A0111.008.0026	RVE2-12	12	1/2"	13.0	19.2	16.6	35.6	10.0	2.3	4.7	0.8	500		
A0111.008.0027	RVE3.5-4	4	#8	4.3	8.0	8.0	24.7	13.0	2.9	6.2	1.0	500	Black 黑色	
A0111.008.0028	RVE3.5-4L	4	#8	4.3	9.5	8.5	30.7	13.0	2.9	6.2	1.0	500		
A0111.008.0029	RVE3.5-5S	5	#10	5.3	8.0	8.0	24.7	13.0	2.9	6.2	1.0	500		
A0111.008.0030	RVE3.5-5M	5	#10	5.3	9.5	8.5	30.7	13.0	2.9	6.2	1.0	500		
A0111.008.0031	RVE 3.5-6	6	1/4"	6.4	12.0	9.4	28.4	13.0	2.9	6.2	1.0	500		
A0111.008.0032	RVE3.5-8	8	5/16"	8.4	15.0	13.3	34.0	13.0	2.9	6.2	1.0	500		
A0111.008.0033	RVE3.5-10	10	3/8"	10.5	15.0	13.3	34.0	13.0	2.9	6.2	1.0	500		
A0111.008.0034	RE5.5-3.5	3.5	#6	3.7	7.2	5.9	22.5	13	3.4	6.5	1	500	Yellow 黄色	
A0111.008.0035	RE5.5-4S	4	#8	4.3	7.2	5.9	22.5	13	3.4	6.5	1	500		
A0111.008.0036	RE5.5-4L	4	#8	4.3	9.5	8.85	26.6	13	3.4	6.5	1	500		
A0111.008.0037	RE5.5-5	5	#10	5.3	9.5	8.85	26.6	13	3.4	6.5	1	500		
A0111.008.0038	RE5.5-6	6	1/4"	6.4	12	10.5	29.5	13	3.4	6.5	1	500		
A0111.008.0039	RE5.5-6L	6	1/4"	6.4	12	13	32	13	3.4	6.5	1	500		
A0111.008.0040	RE5.5-8	8	5/16"	8.4	15	13.5	34	13	3.4	6.5	1	500		
A0111.008.0041	RE5.5-10	10	3/8"	10.5	15	13.5	34	13	3.4	6.5	1	500		
A0111.008.0042	RE55-12	12	1/2"	13	19.2	16	38.6	13	3.4	6.5	1	500		
A0111.008.0043	RE8-4	4	#8	4.3	8.8	9.3	29.3	16	4.5	8	1.2	500	Red 红色	
A0111.008.0044	RE8-5S	5	#10	5.3	8.8	9.3	29.7	16	4.5	8	1.2	500		
A0111.008.0045	RE8-5M	5	#10	5.3	12	9.3	31.3	16	4.5	8	1.2	500		
A0111.008.0046	RE8-5L	5	#10	5.3	15	13.8	37.3	16	4.5	8	1.2	500		

CE RoHS

EASCO® RE Type Insulated Ring Terminal Lugs (Easy Entry) EASCO® 圆形预绝缘端头(易进线型)



Material: Red Copper with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V
材质: 紫铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V



Article No.	Part No.	Stud Size 螺栓口直径 美制螺旋栓号		Dimension(尺寸)								Pkg Qty (pcs) 包装数(个)	Color 颜色
		Metric	American	d2	W	F	L	H	d1	D	T		
A0111.008.0047	RE8-6S	6	1/4"	6.4	12	9.3	31.3	16	4.5	8	1.2	500	Red 红色
A0111.008.0048	RE8-8	8	5/16"	8.4	15	11.1	37.3	16	4.5	8	1.2	500	
A0111.008.0049	RE8-10	10	3/8"	10.5	15	11.1	37.3	16	4.5	8	1.2	500	
A0111.008.0050	RE8-12	12	1/2"	13	20	15	41	16	4.5	8	1.2	500	
A0111.008.0051	RE14-4	4	#8	4.3	12	13.3	40.8	21.5	5.4	11	1.4	200	Blue 蓝色
A0111.008.0052	RE14-5	5	#10	5.3	12	13.3	40.8	21.5	5.4	11	1.4	200	
A0111.008.0053	RE14-6S	6	1/4"	6.4	12	13.3	40.8	21.5	5.4	11	1.4	200	
A0111.008.0054	RE14-8	8	5/16"	8.4	16	14.5	43.5	21.5	5.4	11	1.4	200	
A0111.008.0055	RE14-10	10	3/8"	10.5	16	14.5	43.5	21.5	5.4	11	1.4	200	Yellow 黄色
A0111.008.0056	RE14-12	12	1/2"	13	22	19.5	52	21.5	5.4	11	1.4	200	
A0111.008.0057	RE22-5S	5	#10	5.3	12.2	15.1	44.7	23.5	7.7	13	1.8	100	
A0111.008.0058	RE22-6S	6	1/4"	6.4	12.2	15.1	44.7	23.5	7.7	13	1.8	100	
A0111.008.0059	RE22-8	8	5/16"	8.4	16.5	13.5	45.2	23.5	7.7	13	1.8	100	Red 红色
A0111.008.0060	RE22-10	10	3/8"	10.5	16.5	13.5	45.2	23.5	7.7	13	1.8	100	
A0111.008.0061	RE22-12	12	1/2"	13	22	19.5	54	23.5	7.7	13	1.8	100	
A0111.008.0062	RE38-5	5	#10	5.3	15.3	17.4	52	27	9.4	14.5	1.8	50	
A0111.008.0063	RE38-6	6	1/4"	6.4	15.3	17.4	52	27	9.4	14.5	1.8	50	Red 红色
A0111.008.0064	RE38-8S	8	5/16"	8.4	15.3	17.4	52	27	9.4	14.5	1.8	50	
A0111.008.0065	RE38-10S	10	3/8"	10.5	15.3	17.4	52	27	9.4	14.5	1.8	50	
A0111.008.0066	RE38-12	12	1/2"	13	22	17.7	55.7	27	9.4	14.5	1.8	50	


- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS

EASCO® Non-Insulated Ring Terminals EASCO® 90°圆形裸端子



Material: Red Copper
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V
材质: 紫铜
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)
		螺柱口直径	美制螺旋拴号	d2	W	L	L1	H	d1	D	T		
货号	型号	Metric	American	d2	W	L	L1	H	d1	D	T	包装数 (个)	
A0111.061.0001	90D-RNB2-3.2S	3	#4	3.2	5.5	10.5	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0002	90D-RNB2-3.2	3	#4	3.2	6.6	10.5	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0003	90D-RNB2-3.5	3.5	#6	3.7	6.6	10.5	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0004	90D-RNB2-3.5M	3.5	#6	3.7	6.6	12.7	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0005	90D-RNB2-3.5L	3.5	#6	3.7	8.5	15.0	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0006	90D-RNB2-4S	4	#8	4.3	6.6	12.7	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0007	90D-RNB2-4L	4	#8	4.3	8.5	14.7	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0008	90D-RNB2-5S	5	#10	5.3	8.5	14.7	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0009	90D-RNB2-5L	5	#10	5.3	9.5	15.0	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0010	90D-RNB2-6S	6	1/4"	6.4	9.5	15.0	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0011	90D-RNB2-6	6	1/4"	6.4	12.0	20.0	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0012	90D-RNB2-8	8	5/16"	8.4	12.0	20.0	7.1	4.8	2.3	4.0	0.8	1000	
A0111.061.0013	90D-RNB3.5-3S	3	#4	3.2	5.5	14.8	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0014	90D-RNB3.5-3	3	#4	3.2	8.0	16.0	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0015	90D-RNB3.54S	4	#8	4.3	7.2	15.6	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0016	90D-RNB3.5-4	4	#8	4.3	8.0	16.0	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0017	90D-RNB3.5-4L	4	#8	4.3	9.5	16.7	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0018	90D-RNB3.5-5S	5	#10	5.3	8.0	16.0	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0019	90D-RNB3.5-5M	5	#10	5.3	9.5	16.7	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0020	90D-RNB3.5-5L	5	#10	5.3	12.0	19.4	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0021	90D-RNB3.5-6	6	1/4"	6.4	12.0	19.4	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0022	90D-RNB3.5-8	8	5/16"	8.4	15.0	25.0	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0023	90D-RNB3.5-10	10	3/8"	10.5	15.0	25.0	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0024	90D-RNB3.5-12	12	1/2"	13.0	19.2	29.6	8.5	6.0	2.9	5.0	1.0	1000	
A0111.061.0025	90D-RNB5.5-3	3	#4	3.2	7.2	14.3	9.3	6.8	3.4	5.5	1.0	1000	
A0111.061.0026	90D-RNB5.5-3.5	3.5	#6	3.7	7.2	14.3	9.3	6.8	3.4	5.5	1.0	1000	
A0111.061.0027	90D-RNB5.5-4S	4	#8	4.3	7.2	14.3	9.3	6.8	3.4	5.5	1.0	1000	
A0111.061.0028	90D-RNB5.5-4L	4	#8	4.3	9.5	16.6	9.3	6.8	3.4	5.5	1.0	1000	
A0111.061.0029	90D-RNB5.5-5	5	#10	5.3	9.5	16.6	9.3	6.8	3.4	5.5	1.0	1000	
A0111.061.0030	90D-RNB5.5-6	6	1/4"	6.4	12.0	21.3	9.3	6.8	3.4	5.5	1.0	1000	
A0111.061.0031	90D-RNB5.5-6L	6	1/4"	6.4	12.0	23.8	9.3	6.8	3.4	5.5	1.0	1000	
A0111.061.0032	90D-RNB5.5-8	8	5/16"	8.4	15.0	25.8	9.3	6.8	3.4	5.5	1.0	1000	
A0111.061.0033	90D-RNB5.5-10	10	3/8"	10.5	15.0	25.8	9.3	6.8	3.4	5.5	1.0	1000	
A0111.061.0034	90D-RNB5.5-12	12	1/2"	13.0	19.2	30.3	9.3	6.8	3.4	5.5	1.0	500	
A0111.061.0035	90D-RNB8-4S	4	#6	4.3	8.0	19.6	11.7	8.5	4.5	7.2	1.2	500	
A0111.061.0036	90D-RNB8-4	4	#8	4.3	8.8	21.6	11.7	8.5	4.5	7.2	1.2	500	
A0111.061.0037	90D-RNB8-4L	4	#8	4.3	12.0	21.6	11.7	8.5	4.5	7.2	1.2	500	
A0111.061.0038	90D-RNB8-5S	5	#10	5.3	8.8	21.6	11.7	8.5	4.5	7.2	1.2	500	
A0111.061.0039	90D-RNB8-5M	5	#10	5.3	12.0	21.6	11.7	8.5	4.5	7.2	1.2	500	
A0111.061.0040	90D-RNB8-5L	5	#10	5.3	15.0	27.6	11.7	8.5	4.5	7.2	1.2	500	
A0111.061.0041	90D-RNB8-6S	6	1/4"	6.4	12.0	21.6	11.7	8.5	4.5	7.2	1.2	500	
A0111.061.0042	90D-RNB8-6L	6	1/4"	6.4	15.0	27.6	11.7	8.5	4.5	7.2	1.2	500	
A0111.061.0043	90D-RNB8-8	8	5/16"	8.4	15.0	27.6	11.7	8.5	4.5	7.2	1.2	500	
A0111.061.0044	90D-RNB8-10	10	3/8"	10.5	15.0	27.6	11.7	8.5	4.5	7.2	1.2	500	
A0111.061.0045	90D-RNB8-12	12	1/2"	13.0	20.0	31.3	34	8.5	4.5	7.2	1.2	500	
A0111.061.0046	90D-RNB14-4	4	#8	4.3	12.0	27.4	13.5	10.5	6.0	9.0	1.4	500	

CE RoHS EASCO® Non-Insulated Ring Terminals EASCO® 90°圆形裸端子



Material: Red Copper
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V
 材质: 紫铜
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V



Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)
		螺栓口直径	美制螺旋拴号	d2	W	L	L1	H	d1	D	T	
货号	型号	Metric	American									包装数(个)
A0111.061.0047	90D-RNB14-5	5	#10	5.3	12.0	27.4	13.5	10.5	6.0	9.0	1.4	500
A0111.061.0048	90D-RNB14-6S	6	1/4"	6.4	12.0	27.4	13.5	10.5	6.0	9.0	1.4	500
A0111.061.0049	90D-RNB14-6L	6	1/4"	6.4	16.0	30.4	13.5	10.5	6.0	9.0	1.4	500
A0111.061.0050	90D-RNB14-8	8	5/16"	8.4	16.0	30.4	13.5	10.5	6.0	9.0	1.4	500
A0111.061.0051	90D-RNB14-10	10	3/8"	10.5	16.0	30.4	13.5	10.5	6.0	9.0	1.4	500
A0111.061.0052	90D-RNB14-10L	10	3/8"	10.5	22.0	38.6	13.5	10.5	6.0	9.0	1.4	500
A0111.061.0053	90D-RNB14-12	12	1/2"	13.0	22.0	38.6	13.5	10.5	6.0	9.0	1.4	500
A0111.061.0054	90D-RNB22-4	4	#8	4.3	12.2	30.4	15.8	12.0	8.1	11.5	1.8	200
A0111.061.0055	90D-RNB22-5S	5	#10	5.3	12.2	30.4	15.8	12.0	8.1	11.5	1.8	200
A0111.061.0056	90D-RNB22-5L	5	#10	5.3	16.5	31	15.8	12.0	8.1	11.5	1.8	200
A0111.061.0057	90D-RNB22-6S	6	1/4"	6.4	12.2	30.4	15.8	12.0	8.1	11.5	1.8	200
A0111.061.0058	90D-RNB22-6L	6	1/4"	6.4	16.5	30.9	15.8	12.0	8.1	11.5	1.8	200
A0111.061.0059	90D-RNB22-8	8	5/16"	8.4	16.5	30.9	15.8	12.0	8.1	11.5	1.8	200
A0111.061.0060	90D-RNB22-10	10	3/8"	10.5	16.5	30.9	15.8	12.0	8.1	11.5	1.8	200
A0111.061.0061	90D-RNB22-10L	10	3/8"	10.5	22.0	39.7	15.8	12.0	8.1	11.5	1.8	200
A0111.061.0062	90D-RNB22-12	12	1/2"	13.0	22.0	39.7	15.8	12.0	8.1	11.5	1.8	200
A0111.061.0063	90D-RNB38-5	5	#10	5.3	15.3	36.1	17.8	14.0	9.7	13.3	1.8	100
A0111.061.0064	90D-RNB38-6S	6	1/4"	6.4	15.3	36.1	17.8	14.0	9.7	13.3	1.8	100
A0111.061.0065	90D-RNB38-6L	6	1/4"	6.4	22.0	39.9	17.8	14.0	9.7	13.3	1.8	100
A0111.061.0066	90D-RNB38-8S	8	5/16"	8.4	15.3	36.2	17.8	14.0	9.7	13.3	1.8	100
A0111.061.0067	90D-RNB38-8L	8	5/16"	8.4	22.0	39.9	17.8	14.0	9.7	13.3	1.8	100
A0111.061.0068	90D-RNB38-10S	10	3/8"	10.5	15.3	36.2	17.8	14.0	9.7	13.3	1.8	100
A0111.061.0069	90D-RNB38-10L	10	3/8"	10.5	22.0	39.9	17.8	14.0	9.7	13.3	1.8	100
A0111.061.0070	90D-RNB38-12	12	1/2"	13.0	22.0	39.9	17.8	14.0	9.7	13.3	1.8	100

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool



A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier



CE RoHS EASCO® Circular Cold Press Terminal (圆形冷压端头)

Material: Red Copper. (材质: 紫铜)



Article No.	Part No.	Dimension(尺寸)								Pkg Qty (pcs) 包装数 (个)
		Φ	B	L	E	D	C	T		
货号	型号									
A0111.062.0001	OT0.5-3	3.2	6.0	13.0	4.0	2.3	1.3	0.5	200	
A0111.062.0002	OT0.5-7	4.2	7.0	14.0	4.0	2.3	1.3	0.5	200	
A0111.062.0003	OT1-3	3.2	6.0	14.5	5.0	3.2	1.7	0.7	1000	
A0111.062.0004	OT1-4	4.2	7.6	16.6	5.0	3.2	1.7	0.7	1000	
A0111.062.0005	OT1.5-3	3.2	6.0	14.4	5.0	3.6	2.2	0.7	1000	
A0111.062.0006	OT1.5-4	4.2	7.8	16.6	5.0	3.6	2.2	0.7	1000	
A0111.062.0007	OT1.5-5	5.2	9.5	19.3	5.0	3.6	2.2	0.7	1000	
A0111.062.0008	OT1.5-6	6.2	11.5	21.5	5.0	3.6	2.2	0.7	1000	
A0111.062.0009	OT1.5-8	8.2	15.0	25.0	5.0	3.6	2.2	0.7	1000	
A0111.062.0010	OT1.5-10	10.2	18.0	29.0	5.0	3.6	2.2	0.7	1000	
A0111.062.0011	OT1.5-12	12.2	18.0	29.0	5.0	3.6	2.2	0.7	1000	
A0111.062.0012	OT1.5-16	16.2	24.0	34.0	5.0	3.6	2.2	0.7	1000	
A0111.062.0013	OT2.5-3	3.2	6.5	15.0	5.0	4.2	2.8	0.7	1000	
A0111.062.0014	OT2.5-4	4.2	7.6	17.01	5.0	4.2	2.8	0.7	1000	
A0111.062.0015	OT2.5-5	5.2	9.5	19.3	5.0	4.2	2.8	0.7	1000	
A0111.062.0016	OT2.5-6	6.2	11.0	21.4	5.0	4.2	2.8	0.7	1000	
A0111.062.0017	OT2.5-8	8.2	15.0	25.0	5.0	4.2	2.8	0.7	1000	
A0111.062.0018	OT2.5-10	10.2	18.0	29.0	5.0	4.2	2.8	0.7	1000	
A0111.062.0019	OT2.5-12	12.2	18.0	29.0	5.0	4.2	2.8	0.7	1000	
A0111.062.0020	OT2.5-14	14.2	24.0	34.0	5.0	4.2	2.8	0.7	1000	
A0111.062.0021	OT2.5-16	16.2	24.0	34.0	5.0	4.2	2.8	0.7	1000	
A0111.062.0022	OT4-4	4.2	8.5	18.1	6.0	5.3	3.0	1.0	1000	
A0111.062.0023	OT4-5	5.2	10.0	20.0	6.0	5.3	3.0	1.0	1000	
A0111.062.0024	OT4-6	6.2	12.0	23.2	6.0	5.3	3.0	1.0	1000	
A0111.062.0025	OT4-8	8.2	15.0	26.5	6.0	5.3	3.0	1.0	1000	
A0111.062.0026	OT4-10	10.2	18.0	31.2	6.0	5.3	3.0	1.0	500	
A0111.062.0027	OT4-12	12.2	19.5	33.2	6.0	5.3	3.0	1.0	500	
A0111.062.0028	OT4-16	16.2	25.0	38.5	6.0	5.3	3.0	1.0	500	
A0111.062.0029	OT6-4	4.2	9.0	19.5	7.0	6.2	4.2	1.0	1000	
A0111.062.0030	OT6-5	5.2	11.0	23.0	7.0	6.2	4.2	1.0	1000	
A0111.062.0031	OT6-6	6.2	12.0	24.5	7.0	6.2	4.2	1.0	1000	
A0111.062.0032	OT6-8	8.2	15.0	27.5	7.0	6.2	4.2	1.0	1000	
A0111.062.0033	OT6-10	10.5	18.2	32.3	7.0	6.2	4.2	1.0	1000	
A0111.062.0034	OT6-12	12.5	20.0	34.0	7.0	6.2	4.2	1.0	500	
A0111.062.0035	OT6-14	14.5	25.0	39.2	7.0	6.2	4.2	1.0	500	
A0111.062.0036	OT6-16	16.5	25.0	39.2	7.0	6.2	4.2	1.0	200	
A0111.062.0037	OT6-18	18.5	29.0	44.0	7.0	6.2	4.2	1.0	200	
A0111.062.0038	OT6-20	20.5	32.0	47.0	7.0	6.2	4.2	1.0	200	
A0111.062.0039	OT6-22	22.5	32.0	47.0	7.0	6.2	4.2	1.0	200	
A0111.062.0040	OT10-4	4.2	10.0	23.2	8.5	8.0	5.6	1.2	500	
A0111.062.0041	OT10-5	5.2	12.0	26.0	8.5	8.0	5.6	1.2	500	
A0111.062.0042	OT10-6	6.2	14.0	27.5	8.5	8.0	5.6	1.2	500	
A0111.062.0043	OT10-8	8.2	16.0	30.2	8.5	8.0	5.6	1.2	500	
A0111.062.0044	OT10-10	10.5	17.3	34.3	8.5	8.0	5.6	1.2	500	
A0111.062.0045	OT10-12	12.5	21.0	38.2	8.5	8.0	5.6	1.2	500	
A0111.062.0046	OT10-14	14.5	23.0	40.8	8.5	8.0	5.6	1.2	500	
A0111.062.0047	OT10-16	16.5	25.0	42.1	8.5	8.0	5.6	1.2	500	
A0111.062.0048	OT10-18	18.5	32.2	48.5	8.5	8.0	5.6	1.2	500	
A0111.062.0049	OT10-20	20.5	32.2	48.5	8.5	8.0	5.6	1.2	200	
A0111.062.0050	OT10-22	22.5	32.2	48.5	8.5	8.0	5.6	1.2	200	
A0111.062.0051	OT10-24	24.5	40.0	58.5	8.5	8.0	5.6	1.2	200	
A0111.062.0052	OT10-28	28.5	40.0	58.5	8.5	8.0	5.6	1.2	200	
A0111.062.0053	OT16-5	5.2	15.0	31.0	10.5	10.0	7.0	1.5	200	



CE RoHS EASCO® Circular Cold Press Terminal (圆形冷压端头)



Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)
		Φ	B	L	E	D	C	T	
货号	型号	包装数 (个)							
A0111.062.0054	OT16-6	6.2	15.0	31.0	10.5	10.0	7.0	1.5	200
A0111.062.0055	OTS16-6	6.2	13.0	29.5	10.5	10.0	7.4	1.3	200
A0111.062.0056	OT16-8	8.2	18.0	33.5	10.5	10.0	7.0	1.5	200
A0111.062.0057	OTS16-8	8.2	16.0	32.0	10.5	10.0	7.4	1.3	200
A0111.062.0058	OT16-10	10.5	20.2	38.0	10.5	10.0	7.0	1.5	200
A0111.062.0059	OTS16-10	10.5	18.0	35.0	10.5	10.0	7.4	1.3	200
A0111.062.0060	OT16-12	12.5	23.0	41.5	10.5	10.0	7.0	1.5	200
A0111.062.0061	OTS16-12	12.5	21.0	39.0	10.5	10.0	7.4	1.3	200
A0111.062.0062	OT16-14	14.5	23.0	41.5	10.5	10.0	7.0	1.5	200
A0111.062.0063	OT16-16	16.5	30.0	54.0	14.0	10.0	7.0	1.5	100
A0111.062.0064	OT16-18	18.5	30.0	54.0	14.0	10.0	7.0	1.5	100
A0111.062.0065	OT16-20	20.5	35.0	57.0	14.0	10.0	7.0	1.5	100
A0111.062.0066	OT16-22	22.5	35.0	57.0	14.0	10.0	7.0	1.5	100
A0111.062.0067	OT16-24	24.5	35.0	57.0	14.0	10.0	7.0	1.5	100
A0111.062.0068	OT25-6	6.2	17.0	33.5	14.0	12.1	8.5	1.8	200
A0111.062.0069	OTS25-6	6.2	13.0	31.0	12.0	12.0	8.8	1.6	200
A0111.062.0070	OT25-8	8.2	20.0	37.5	14.0	12.1	8.5	1.8	200
A0111.062.0071	OTS25-8	8.2	16.0	34.0	12.0	12.0	8.8	1.6	200
A0111.062.0072	OT25-10	10.5	22.0	40.5	14.0	12.1	8.5	1.8	200
A0111.062.0073	OTS25-10	10.5	19.0	37.0	12.0	12.0	8.8	1.6	200
A0111.062.0074	OT25-12	12.5	24.0	45.0	14.0	12.1	8.5	1.8	200
A0111.062.0075	OTS25-12	12.5	21.0	40.0	12.0	12.0	8.8	1.6	200
A0111.062.0076	OT25-14	14.5	26.0	47.0	14.0	12.1	8.5	1.8	200
A0111.062.0077	OT25-16	16.5	26.0	47.0	14.0	12.1	8.5	1.8	100
A0111.062.0078	OT25-18	18.5	30.0	54.0	14.0	12.1	8.5	1.8	100
A0111.062.0079	OT25-20	20.5	35.0	57.0	14.0	12.1	8.5	1.8	100
A0111.062.0080	OT25-22	22.5	35.0	57.0	14.0	12.1	8.5	1.8	100
A0111.062.0081	OT25-24	24.5	35.0	57.0	14.0	12.1	8.5	1.8	100
A0111.062.0082	OT25-27	27.5	50.0	74.0	14.0	12.1	8.5	1.8	100
A0111.062.0083	OT25-30	30.5	50.0	74.0	14.0	12.1	8.5	1.8	100
A0111.062.0084	OT25-33	33.5	50.0	74.0	14.0	12.1	8.5	1.8	100
A0111.062.0085	OT35-6	6.2	17.0	35.0	14.0	13.1	9.5	1.8	200
A0111.062.0086	OT35-8	8.2	21.0	38.5	14.0	13.1	9.5	1.8	200
A0111.062.0087	OTS35-8	8.2	17.0	36.0	14.0	13.0	9.8	1.6	200
A0111.062.0088	OT35-10	10.5	23.0	43.0	14.0	13.1	9.5	1.8	100
A0111.062.0089	OTS35-10	10.5	19.0	39.5	14.0	13.0	9.8	1.6	100
A0111.062.0090	OT35-12	12.5	25.0	47.0	14.0	13.1	9.5	1.8	100
A0111.062.0091	OTS35-12	12.5	21.0	41.5	14.0	13.0	9.8	1.6	100
A0111.062.0092	OT35-14	14.5	27.0	50.0	14.0	13.1	9.5	1.8	100
A0111.062.0093	OT35-16	16.5	30.0	54.0	14.0	13.1	9.5	1.8	100
A0111.062.0094	OT35-18	18.5	30.0	54.0	14.0	13.1	9.5	1.8	100
A0111.062.0095	OT35-2	20.5	35.0	57.0	14.0	13.1	9.5	1.8	100
A0111.062.0096	OT35-22	22.5	35.0	57.0	14.0	13.1	9.5	1.8	100
A0111.062.0097	OT35-24	24.5	35.0	57.0	14.0	13.1	9.5	1.8	100
A0111.062.0098	OT35-37	37.5	55.0	85.0	14.0	13.1	9.5	1.8	100
A0111.062.0099	OT50-6	6.2	20.0	37.0	14.0	15.1	11.5	1.8	100
A0111.062.0100	OTS50-6	6.2	18.0	39.0	14.0	15.0	11.8	1.6	100
A0111.062.0101	OT50-8	8.2	22.0	39.0	14.0	15.1	11.5	1.8	100
A0111.062.0102	OTS50-8	8.2	18.0	39.0	14.0	15.0	11.8	1.6	100
A0111.062.0103	OT50-10	10.5	24.5	43.5	14.0	15.1	11.5	1.8	100
A0111.062.0104	OTS50-10	10.5	20.0	42.0	14.0	15.0	11.8	1.6	100
A0111.062.0105	OT50-12	12.5	26.0	47.5	14.0	15.1	11.5	1.8	100
A0111.062.0106	OTS50-12	12.5	24.0	44.0	14.0	15.0	11.8	1.6	100
A0111.062.0107	OT50-14	14.5	30.0	54.0	14.0	15.1	11.5	1.8	100
A0111.062.0108	OT50-16	16.5	30.0	54.0	14.0	15.1	11.5	1.8	100



- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS EASCO® Circular Cold Press Terminal (圆形冷压端头)



Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)
		Φ	B	L	E	D	C	T	
货号	型号	Φ	B	L	E	D	C	T	包装数 (个)
A0111.062.0109	OT50-18	18.5	30.0	54.0	14.0	15.1	11.5	1.8	100
A0111.062.0110	OT50-20	20.5	35.0	57.0	14.0	15.1	11.5	1.8	100
A0111.062.0111	OT50-22	22.5	35.0	57.0	14.0	15.1	11.5	1.8	100
A0111.062.0112	OT50-24	24.5	35.0	57.0	14.0	15.1	11.5	1.8	100
A0111.062.0113	OT70-6	6.2	22.0	49.0	18.5	17.5	13.1	2.2	100
A0111.062.0114	OT70-8	8.2	22.0	49.0	18.5	17.5	13.1	2.2	100
A0111.062.0115	OT70-10	10.5	24.5	51.0	18.5	17.5	13.1	2.2	100
A0111.062.0116	OTS70-10	10.5	22.0	49.0	18.5	17.5	13.0	2.2	100
A0111.062.0117	OT70-12	12.5	24.5	51.0	18.5	17.5	13.1	2.2	100
A0111.062.0118	OT70-14	14.5	29.5	60.0	18.5	17.5	13.1	2.2	100
A0111.062.0119	OT70-16	16.5	29.5	60.0	18.5	17.5	13.1	2.2	100
A0111.062.0120	OT70-18	18.5	29.5	60.0	18.5	17.5	13.1	2.2	50
A0111.062.0121	OT70-20	20.5	38.0	65.0	18.5	17.5	13.1	2.2	50
A0111.062.0122	OT70-22	22.5	38.0	65.0	18.5	17.5	13.1	2.2	50
A0111.062.0123	OT70-24	24.5	38.0	65.0	18.5	17.5	13.1	2.2	50
A0111.062.0124	OT95-6	6.2	23.0	51.1	20.0	19.5	15.1	2.2	50
A0111.062.0125	OT95-8	8.2	23.0	51.1	20.0	19.5	15.1	2.2	50
A0111.062.0126	OT95-10	10.5	27.0	53.0	20.0	19.5	15.1	2.2	50
A0111.062.0127	OTS95-10	10.5	23.0	51.0	20.0	19.5	15.1	2.2	50
A0111.062.0128	OT95-12	12.5	27.0	53.0	20.0	19.5	15.1	2.2	50
A0111.062.0129	OT95-14	14.5	29.0	65.0	20.0	19.5	15.1	2.2	50
A0111.062.0130	OT95-16	16.5	29.0	65.0	20.0	19.5	15.1	2.2	50
A0111.062.0131	OT95-18	18.5	29.0	65.0	20.0	19.5	15.1	2.2	50
A0111.062.0132	OT95-20	20.5	38.0	70.0	20.0	19.5	15.1	2.2	50
A0111.062.0133	OT95-22	22.5	38.0	70.0	20.0	19.5	15.1	2.2	50
A0111.062.0134	OT95-24	24.5	38.0	70.0	20.0	19.5	15.1	2.2	50
A0111.062.0135	OT120-8	8.5	30.0	60.0	22.0	22.5	17.0	2.6	50
A0111.062.0136	OT120-10	10.5	30.0	60.0	22.0	22.5	17.0	2.6	50
A0111.062.0137	OT120-12	12.5	30.0	60.0	22.0	22.5	17.0	2.6	50
A0111.062.0138	OT120-14	14.5	30.0	60.0	22.0	22.5	17.0	2.6	50
A0111.062.0139	OT120-14	16.5	30.0	60.0	22.0	22.5	17.0	2.6	50
A0111.062.0140	OT120-18	18.5	39.0	75.0	22.0	22.5	17.0	2.6	50
A0111.062.0141	OT120-20	20.5	39.0	75.0	22.0	22.5	17.0	2.6	50
A0111.062.0142	OT120-24	24.5	39.0	75.0	22.0	22.5	17.0	2.6	50
A0111.062.0143	OT150-8	8.5	31.0	64.0	25.5	24.5	18.1	3.2	50
A0111.062.0144	OT150-10	10.5	31.0	64.0	25.5	24.5	18.1	3.2	50
A0111.062.0145	OT150-12	12.5	31.0	64.0	25.5	24.5	18.1	3.2	50
A0111.062.0146	OT150-14	14.5	31.0	64.0	25.5	24.5	18.1	3.2	50
A0111.062.0147	OT150-16	16.5	31.0	64.0	25.5	24.5	18.1	3.2	50
A0111.062.0148	OT150-20	20.4	39.0	78.0	25.5	24.5	18.1	3.2	50
A0111.062.0149	OT185-8	8.5	32.0	67.0	27.0	27.2	20.0	3.6	20
A0111.062.0150	OT185-10	10.5	32.0	67.0	27.0	27.2	20.0	3.6	20
A0111.062.0151	OT185-12	12.5	32.0	67.0	27.0	27.2	20.0	3.6	20
A0111.062.0152	OT185-14	14.5	32.0	67.0	27.0	27.2	20.0	3.6	20
A0111.062.0153	OT185-16	16.5	32.0	67.0	27.0	27.2	20.0	3.6	20
A0111.062.0154	OT185-20	20.5	39.0	80.0	27.0	27.2	20.0	3.6	20
A0111.062.0155	OT240-8	8.5	38.0	70.0	30.0	32.0	24.0	4.0	20
A0111.062.0156	OT240-10	10.5	38.0	70.0	30.0	32.0	24.0	4.0	20
A0111.062.0157	OT240-12	12.5	38.0	70.0	30.0	32.0	24.0	4.0	20
A0111.062.0158	OT240-14	14.5	38.0	70.0	30.0	32.0	24.0	4.0	20
A0111.062.0159	OT240-16	16.5	38.0	70.0	30.0	32.0	24.0	4.0	20
A0111.062.0160	OT300-10	10.5	50.5	103.0	35.0	37.5	29.0	4.2	20
A0111.062.0161	OT300-12	12.5	50.5	103.0	35.0	37.5	29.0	4.2	20
A0111.062.0162	OT300-14	14.5	50.5	103.0	35.0	37.5	29.0	4.2	20
A0111.062.0163	OT300-16	16.5	50.5	103.0	35.0	37.5	29.0	4.2	20

CE RoHS EASCO® Circular Cold Press Terminal (圆形冷压端头)



Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)
		Φ	B	L	E	D	C	T	
货号	型号	Φ	B	L	E	D	C	T	包装数 (个)
A0111.062.0164	OT300-18	18.5	50.5	103.0	35.0	37.5	29.0	4.2	20
A0111.062.0165	OT300-20	20.5	50.5	103.0	35.0	37.5	29.0	4.2	20
A0111.062.0166	OTZ10-6	6.2	12.0	27.0	8.5	8.0	5.6	1.2	500
A0111.062.0167	OTZ10-8	8.2	15.0	30.0	8.5	8.0	5.6	1.2	500
A0111.062.0168	OTZ16-6	6.2	13.0	30.5	10.5	10.0	7.0	1.5	200
A0111.062.0169	OTZ16-8	8.2	15.0	35.0	10.5	10.0	7.0	1.5	200
A0111.062.0170	OTZ16-10	10.5	17.0	37.0	10.5	10.0	7.0	1.5	200
A0111.062.0171	OTZ25-6	6.2	13.0	31.0	12.0	12.1	8.5	1.8	200
A0111.062.0172	OTZ25-8	8.2	16.0	34.0	12.0	12.1	8.5	1.8	200
A0111.062.0173	OTZ25-10	10.5	18.0	40.0	12.0	12.1	8.5	1.8	200
A0111.062.0174	OTZ25-12	12.5	18.0	40.0	12.0	12.1	8.5	1.8	200
A0111.062.0175	OTZ35-6	6.2	13.0	35.0	14.0	13.1	9.5	1.8	200
A0111.062.0176	OTZ35-8	8.2	16.0	40.0	14.0	13.1	9.5	1.8	100
A0111.062.0177	OTZ35-10	10.5	18.0	40.0	14.0	13.1	9.5	1.8	100
A0111.062.0178	OTZ35-12	12.5	18.2	40.7	14.0	13.1	9.5	1.8	100
A0111.062.0179	OTZ50-6	6.2	13.0	35.0	14.0	15.1	11.5	1.8	100
A0111.062.0180	OTZ50-8	8.2	16.0	40.0	14.0	15.1	11.5	1.8	100
A0111.062.0181	OTZ50-10	10.5	18.0	41.0	14.0	15.1	11.5	1.8	100
A0111.062.0182	OTZ50-12	12.5	20.0	42.0	14.0	15.1	11.5	1.8	100

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool


A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

CE RoHS EASCO® Bare Circular Terminal For Watercraft (圆形船用裸端头)

Material: Red Copper. (材质:紫铜)




Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)
		Φ	B	L	E	D	C	T	
货号	型号	Φ	B	L	E	D	C	T	包装数 (个)
A0111.063.0001	JB0.75-3	3.2	6.0	17.0	7.0	3.3	1.3	0.7	1000
A0111.063.0002	JB0.75-4	4.2	7.5	18.0	7.0	3.3	1.3	0.7	1000
A0111.063.0003	JB0.75-6	6.2	10.0	20.5	7.0	3.3	1.3	0.7	1000
A0111.063.0004	JB1-3	3.2	6.0	17.0	7.0	3.7	1.7	0.7	1000
A0111.063.0005	JB1-4	4.2	7.5	18.0	7.0	3.7	1.7	0.7	1000
A0111.063.0006	JB1-5	5.2	8.0	18.0	7.0	3.7	1.7	0.7	1000
A0111.063.0007	JB1-6	6.2	10.0	20.5	7.0	3.7	1.7	0.7	1000
A0111.063.0008	JB1.5-3	3.2	6.0	17.0	7.0	4.05	2.0	0.7	1000
A0111.063.0009	JB1.5-4	4.2	7.5	18.0	7.0	4.05	2.0	0.7	1000
A0111.063.0010	JB1.5-5	5.2	8.0	18.0	7.0	4.05	2.0	0.7	1000
A0111.063.0011	JB1.5-6	6.2	10.0	20.5	7.0	4.05	2.0	0.7	1000
A0111.063.0012	JB1.5-8	8.2	13.0	26.0	7.0	4.05	2.0	0.7	1000
A0111.063.0013	JB2.5-3	3.2	6.0	17.0	8.5	4.6	2.6	0.7	1000
A0111.063.0014	JB2.5-4	4.2	8.0	20.0	8.5	4.6	2.6	0.7	1000
A0111.063.0015	JB2.5-5	5.2	9.0	21.5	8.5	4.6	2.6	0.7	1000
A0111.063.0016	JB2.5-6	6.2	10.5	23.5	8.5	4.6	2.6	0.7	1000
A0111.063.0017	JB2.5-8	8.2	13.5	28.5	8.5	4.6	2.6	0.7	1000
A0111.063.0018	JB4-4	4.2	9.0	22.0	9.0	5.3	2.8	0.8	1000
A0111.063.0019	JB4-5	5.2	9.0	22.0	9.0	5.3	2.8	0.8	1000
A0111.063.0020	JB4-6	6.2	12.0	27.0	9.0	5.3	2.8	0.8	1000
A0111.063.0021	JB4-8	8.2	13.5	28.5	9.0	5.3	2.8	0.8	1000
A0111.063.0022	JB4-10	10.5	15.6	29.3	9.0	5.3	2.8	0.8	500
A0111.063.0023	JB6-4	4.2	11.0	26.0	10.0	6.2	3.5	1.0	500
A0111.063.0024	JB6-5	5.2	11.0	26.0	10.0	6.2	3.5	1.0	500
A0111.063.0025	JB6-6	6.2	12.5	29.0	10.0	6.2	3.5	1.0	500
A0111.063.0026	JB6-8	8.2	13.5	29.0	10.0	6.2	3.5	1.0	500
A0111.063.0027	JB6-10	10.5	15.5	30.0	10.0	6.2	3.5	1.0	500
A0111.063.0028	JB10-4	4.2	10.5	27.0	11.0	7.8	4.3	1.2	500
A0111.063.0029	JB10-5	5.2	10.5	27.0	11.0	7.8	4.3	1.2	500
A0111.063.0030	JB10-6	6.2	12.5	29.0	11.0	7.8	4.3	1.2	500
A0111.063.0031	JB10-8	8.2	14.0	31.0	11.0	7.8	4.3	1.2	500
A0111.063.0032	JB10-10	10.5	17.5	35.5	11.0	7.8	4.3	1.2	500
A0111.063.0033	JB16-6	6.2	13.5	31.0	12.0	9.5	5.7	1.3	200
A0111.063.0034	JB16-8	8.2	15.0	32.5	12.0	9.5	5.7	1.3	200
A0111.063.0035	JC1-3	3.2	6.0	16.6	7.0	3.7	1.7	0.7	200
A0111.063.0036	JC1-4	4.2	7.5	18.0	7.0	3.7	1.7	0.7	200

CE RoHS

EASCO® SNB Type Non Insulated Fork Terminal Lugs EASCO® 叉形裸端头



Material: Red Copper
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V.
材质: 紫铜
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V



Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)
		螺柱口直径	美制螺旋栓号	d2	W	F	L	H	d1	D	T	
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数 (个)
A0111.009.0001	SNB0.5-2	2	#2	2.2	5	5.6	13.7	4.0	1.2	2.2	0.5	1000
A0111.009.0002	SNB0.5-3.2	3	#4	3.2	5.2	5.6	13.7	4.0	1.2	2.2	0.5	1000
A0111.009.0003	SNB0.5-3.7	3.5	#6	3.7	6	6.2	13.7	4.0	1.2	2.2	0.5	1000
A0111.009.0004	SNB0.5-4	4	#8	4.3	7.0	6.2	13.7	4.0	1.2	2.2	0.5	1000
A0111.009.0005	SNB0.5-5	5	#10	5.3	8.0	7.0	13.7	4.0	1.2	2.2	0.5	1000
A0111.009.0006	SNB1.25-3.2	3	#4	3.2	5.7	6.5	16.0	4.8	1.8	3.4	0.7	1000
A0111.009.0007	SNB1.25-3.5S	3.5	#6	3.7	5.7	6.5	16.0	4.8	1.8	3.4	0.7	1000
A0111.009.0008	SNB1.25-3.5L	3.5	#6	3.7	6.4	6.5	16.0	4.8	1.8	3.4	0.7	1000
A0111.009.0009	SNB1.25-3.5LL	3.5	#6	3.7	7.2	6.5	16.0	4.8	1.8	3.4	0.7	1000
A0111.009.0010	SNB1.25-4S	4	#8	4.3	6.4	6.5	16.0	4.8	1.8	3.4	0.7	1000
A0111.009.0011	SNB1.25-4M	4	#8	4.3	7.2	6.5	16.0	4.8	1.8	3.4	0.7	1000
A0111.009.0012	SNB1.25-4L	4	#8	4.3	8.1	6.5	16.0	4.8	1.8	3.4	0.7	1000
A0111.009.0013	SNB1.25-5S	5	#10	5.3	8.1	6.5	16.0	4.8	1.8	3.4	0.7	1000
A0111.009.0014	SNB1.25-5L	5	#10	5.3	9.5	6.5	16.0	4.8	1.8	3.4	0.7	1000
A0111.009.0015	SNB1.25-6S	6	1/4"	6.4	9.5	6.5	16.0	4.8	1.8	3.4	0.7	1000
A0111.009.0016	SNB1.25-6L	6	5/16"	6.4	12.0	11.0	22.0	4.8	1.8	3.4	0.7	1000
A0111.009.0017	SNB1.25-8S	8	1/4"	8.4	12.0	11.0	22.0	4.8	1.8	3.4	0.7	1000
A0111.009.0018	SNB2-3.2	3	#4	3.2	5.7	6.5	16.0	4.8	2.4	4.0	0.8	1000
A0111.009.0019	SNB2-3.5S	3.5	#6	3.7	5.7	6.5	16.0	4.8	2.4	4.0	0.8	1000
A0111.009.0020	SNB2-3.5L	3.5	#6	3.7	6.4	6.5	16.0	4.8	2.4	4.0	0.8	1000
A0111.009.0021	SNB2-3.5LL	3.5	#6	3.7	7.2	6.5	16.0	4.8	2.4	4.0	0.8	1000
A0111.009.0022	SNB2-4S	4	#8	4.3	6.4	6.5	16.0	4.8	2.4	4.0	0.8	1000
A0111.009.0023	SNB2-4M	4	#8	4.3	7.2	6.5	16.0	4.8	2.4	4.0	0.8	1000
A0111.009.0024	SNB2-4L	4	#8	4.3	8.1	6.5	16.0	4.8	2.4	4.0	0.8	1000
A0111.009.0025	SNB2-5S	5	#10	5.3	8.1	6.5	16.0	4.8	2.4	4.0	0.8	1000
A0111.009.0026	SNB2-5L	5	#10	5.3	9.5	6.5	16.0	4.8	2.4	4.0	0.8	1000
A0111.009.0027	SNB2-6S	6	1/4"	6.4	9.5	6.5	16.0	4.8	2.4	4.0	0.8	1000
A0111.009.0028	SNB2-6L	6	1/4"	6.4	12.0	11.0	22.0	4.8	2.4	4.0	0.8	1000
A0111.009.0029	SNB2-8S	8	5/16"	8.4	12.0	11.0	22.0	4.8	2.4	4.0	0.8	1000
A0111.009.0030	SNB2-8	8	5/16"	8.4	13.5	11.5	21.8	4.8	2.4	4.0	0.8	1000
A0111.009.0031	SNB3.5-3	3	#4	3.2	5.7	7	18.3	6.0	3.0	5.0	1.0	1000
A0111.009.0032	SNB3.5-3.7	3.5	#6	3.7	8.0	7.7	18.3	6.0	3.0	5.0	1.0	1000
A0111.009.0033	SNB3.5-4S	4	#8	4.3	7.2	7	18.3	6.0	3.0	5.0	1.0	1000
A0111.009.0034	SNB3.5-4	4	#8	4.3	8.0	7.7	18.3	6.0	3.0	5.0	1.0	1000
A0111.009.0035	SNB3.5-5	5	#10	5.3	8.0	7.7	18.3	6.0	3.0	5.0	1.0	1000
A0111.009.0036	SNB3.5-6	6	1/4"	6.4	12.0	9.5	21.5	6.0	3.0	5.0	1.0	1000
A0111.009.0037	SNB3.5-8	8	5/16"	8.4	14.0	11.5	23.7	6.0	3.0	5.0	1.0	1000
A0111.009.0038	SNB3.5-10	10	3/8"	10.5	17.5	12.5	26.5	6.0	3.0	5.0	1.0	1000
A0111.009.0039	SNB5.5-3	3	#4	3.2	6.8	7.5	19.5	6.8	3.5	5.5	1.0	1000
A0111.009.0040	SNB5.5-3.7S	3.5	#6	3.7	6.8	7.5	19.5	6.8	3.5	5.5	1.0	1000
A0111.009.0041	SNB5.5-3.7	3.5	#6	3.7	8.3	7.5	19.5	6.8	3.5	5.5	1.0	1000
A0111.009.0042	SNB5.5-4SS	4	#8	4.3	7.2	7.5	17.4	6.8	3.5	5.5	1.0	1000
A0111.009.0043	SNB5.5-4S	4	#8	4.3	8.3	7.5	19.5	6.8	3.5	5.5	1.0	1000
A0111.009.0044	SNB5.5-4L	4	#8	4.3	9.0	7.5	19.5	6.8	3.5	5.5	1.0	1000
A0111.009.0045	SNB5.5-5	5	#10	5.3	9.0	7.5	19.5	6.8	3.5	5.5	1.0	1000
A0111.009.0046	SNB5.5-6S	6	1/4"	6.4	9.0	7.5	19.5	6.8	3.5	5.5	1.0	1000
A0111.009.0047	SNB5.5-6L	6	1/4"	6.4	12.0	12.0	25.5	6.8	3.5	5.5	1.0	1000

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

A1.
Wiring
Ducts

A2.
Cable
Ties

A3.
Din
Rails

A4.
Cable
Markers

A5.
Cable
Clamps

A6.
Wrapping
Bands

A7.
Nylon
Cable Gland

A8.
Metal
Cable Gland

A9.
Plastic
Flexible
Conduit

A10.
Metal
Flexible
Conduit

A11.
Terminal

A12.
Copper
Tube
Terminals

A13.
Heat
Shrinkable
Tubings

A14.
Bus Bar
Insulators

A15.
Tool

A16.
Cable
Clip

A17.
Insulating
Nut


A18.
Nylon Cable
Carrier

CE RoHS

EASCO® SNB Type Non Insulated Fork Terminal Lugs
EASCO® 叉形裸端头



Material: Red Copper
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V.
材质: 紫铜
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)
		螺柱口直径	美制螺旋栓号	d2	W	F	L	H	d1	D	T	
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数 (个)
A0111.009.0048	SNB5.5-8	8	5/16"	8.4	14.0	11.5	24.5	6.8	3.5	5.5	1.0	1000
A0111.009.0049	SNB5.5-10	10	3/8"	10.5	17.5	12.5	26.5	6.8	3.5	5.5	1.0	1000
A0111.009.0050	SNB8-4S	4	#8	4.3	7.2	7.2	20.8	8.5	4.8	7.2	1.2	500
A0111.009.0051	SNB8-4	4	#8	4.3	9.0	7.2	20.8	8.5	4.8	7.2	1.2	500
A0111.009.0052	SNB8-5	5	#10	5.3	9.0	8.1	20.8	8.5	4.8	7.2	1.2	500
A0111.009.0053	SNB8-6	6	1/4"	6.4	12.0	8.3	24.5	8.5	4.8	7.2	1.2	500
A0111.009.0054	SNB8-8	8	5/16"	8.4	13.8	10.7	25.4	8.5	4.8	7.2	1.2	500
A0111.009.0055	SNB8-10	10	3/8"	10.5	15.9	10.7	25.4	8.5	4.8	7.2	1.2	500
A0111.009.0056	SNB14-4	4	#8	4.3	11.0	9.5	25.0	10.5	6.0	9	1.4	500
A0111.009.0057	SNB14-5	5	#10	5.3	11.0	9.5	25.0	10.5	6.0	9	1.4	500
A0111.009.0058	SNB14-6	6	1/4"	6.4	12.0	9.5	25.0	10.5	6.0	9	1.4	500
A0111.009.0059	SNB14-8	8	5/16"	8.4	13.8	10.7	28.5	10.5	6.0	9	1.4	500
A0111.009.0060	SNB14-10	10	3/8"	10.5	15.9	10.7	28.5	10.5	6.0	9	1.4	500
A0111.009.0061	SNB22-5	5	#10	5.3	11.0	9.5	27.8	12	7.7	11.5	1.8	200
A0111.009.0062	SNB22-6S	6	1/4"	6.4	11.0	9.5	27.8	12	7.7	11.5	1.8	200
A0111.009.0063	SNB22-6	6	1/4"	6.4	14.0	13.0	33.5	12	7.7	11.5	1.8	200
A0111.009.0064	SNB22-8	8	5/16"	8.4	14.0	13.0	33.5	12	7.7	11.5	1.8	200
A0111.009.0065	SNB22-10	10	3/8"	10.5	14.0	13.0	33.5	12	7.7	11.5	1.8	200

CE RoHS EASCO® SV Type Insulated Fork Terminal Lugs EASCO® 叉形预绝缘端头



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V



Article No.	Part No.	Stud Size 螺栓口直径 美制螺旋栓号		Dimension(尺寸)								Pkg Qty (pcs) 包装数 (个)	Color 颜色
		Metric	American	d2	W	F	L	H	d1	D	T		
A0111.010.0001	SV0.5-2	2	#2	2.2	5	5.6	20.3	8.5	1.2	2.3	0.5	1000	Yellow 黄色
A0111.010.0002	SV0.5-3.2	3	#4	3.2	5.2	5.6	20.3	8.5	1.2	2.3	0.5	1000	
A0111.010.0003	SV0.5-3.7	3.5	#6	3.7	6	6.2	20.3	8.5	1.2	2.3	0.5	1000	
A0111.010.0004	SV0.5-4	4	#8	4.3	7.0	6.2	20.3	8.5	1.2	2.3	0.5	1000	
A0111.010.0005	SV0.5-5	5	#10	5.3	8.0	7.0	20.3	8.5	1.2	2.3	0.5	1000	
A0111.010.0006	SV1.25-3.2	3	#4	3.2	5.7	6.5	21.5	10.5	1.7	4.4	0.7	1000	Red 红色
A0111.010.0007	SV1.25-3.5S	3.5	#6	3.7	5.7	6.5	21.5	10.5	1.7	4.4	0.7	1000	
A0111.010.0008	SV1.25-3.5L	3.5	#6	3.7	6.4	6.5	21.5	10.5	1.7	4.4	0.7	1000	
A0111.010.0009	SV1.25-4S	4	#8	4.3	6.4	6.5	21.5	10.5	1.7	4.4	0.7	1000	
A0111.010.0010	SV1.25-4M	4	#8	4.3	7.2	6.5	21.5	10.5	1.7	4.4	0.7	1000	
A0111.010.0011	SV1.25-4L	4	#8	4.3	8.1	6.5	21.5	10.5	1.7	4.4	0.7	1000	
A0111.010.0012	SV1.25-5S	5	#10	5.3	8.1	6.5	21.5	10.5	1.7	4.4	0.7	1000	
A0111.010.0013	SV1.25-5L	5	#10	5.3	9.5	6.5	21.5	10.5	1.7	4.4	0.7	1000	
A0111.010.0014	SV1.25-6S	6	1/4"	6.4	9.5	6.5	21.5	10.5	1.7	4.4	0.7	1000	
A0111.010.0015	SV1.25-6L	6	1/4"	6.4	12.0	11.0	27.5	10.5	1.7	4.4	0.7	1000	
A0111.010.0016	SV1.25-8	8	5/16"	8.4	12.0	11.0	26.5	10.5	1.7	4.4	0.7	1000	Blue 蓝色
A0111.010.0017	SV2-3.2	3	#4	3.2	5.7	6.5	21.5	10.5	2.3	4.7	0.8	1000	
A0111.010.0018	SV2-3.5S	3.5	#6	3.7	5.7	6.5	21.5	10.5	2.3	4.7	0.8	1000	
A0111.010.0019	SV2-3.5L	3.5	#6	3.7	6.4	6.5	21.5	10.5	2.3	4.7	0.8	1000	
A0111.010.0020	SV2-4S	4	#8	4.3	6.4	6.5	21.5	10.5	2.3	4.7	0.8	1000	
A0111.010.0021	SV2-4M	4	#8	4.3	7.2	6.5	21.5	10.5	2.3	4.7	0.8	1000	
A0111.010.0022	SV2-4L	4	#8	4.3	8.1	6.5	21.5	10.5	2.3	4.7	0.8	1000	
A0111.010.0023	SV2-5S	5	#10	5.3	8.1	6.5	21.5	10.5	2.3	4.7	0.8	1000	
A0111.010.0024	SV2-5L	5	#10	5.3	9.5	6.5	21.5	10.5	2.3	4.7	0.8	1000	
A0111.010.0025	SV2-6S	6	1/4"	6.4	9.5	6.5	21.5	10.5	2.3	4.7	0.8	1000	
A0111.010.0026	SV2-6L	6	1/4"	6.4	12.0	11.0	27.5	10.5	2.3	4.7	0.8	1000	
A0111.010.0027	SV2-8	8	5/16"	8.4	13.5	11.5	27.0	10.5	2.3	4.7	0.8	1000	Black 黑色
A0111.010.0028	SV3.5-3	3	#4	3.2	5.7	7.0	21.5	13.0	2.9	6.2	1.0	500	
A0111.010.0029	SV3.5-3.5	3.5	#6	3.7	8.0	7.7	25.3	13.0	2.9	6.2	1.0	500	
A0111.010.0030	SV3.5-4	4.0	#8	4.3	8.0	7.7	25.3	13.0	2.9	6.2	1.0	500	
A0111.010.0031	SV3.5-5	5.0	#10	5.3	8.0	7.7	25.3	13.0	2.9	6.2	1.0	500	
A0111.010.0032	SV3.5-6	6.0	1/4"	6.4	12.0	9.5	28.5	13.0	2.9	6.2	1.0	500	Yellow 黄色
A0111.010.0033	SV3.5-8	8	5/16"	8.4	14	11.5	30.7	13.0	2.9	6.2	1.0	500	
A0111.010.0034	SV5.5-3.5	3.5	#6	3.7	8.3	7.5	25.5	13.5	3.4	6.5	1.0	500	
A0111.010.0035	SV5.5-4S	4	#8	4.3	8.3	7.5	26.0	13.5	3.4	6.5	1.0	500	
A0111.010.0036	SV5.5-4L	4	#8	4.3	9.0	7.5	26.0	13.5	3.4	6.5	1.0	500	
A0111.010.0037	SV5.5-5	5	#10	5.3	9.0	7.5	26.0	13.5	3.4	6.5	1.0	500	Red 红色
A0111.010.0038	SV5.5-6S	6	1/4"	6.4	9.0	7.5	26.0	13.5	3.4	6.5	1.0	500	
A0111.010.0039	SV5.5-6L	6	1/4"	6.4	12.0	12.0	32.5	13.5	3.4	6.5	1.0	500	
A0111.010.0040	SV5.5-8	8	5/16"	8.4	14.0	11.5	30.7	13.5	3.4	6.5	1.0	500	
A0111.010.0041	SV8-4S	4	#8	4.3	7.2	7.2	28.3	16.0	4.5	8.0	1.2	500	
A0111.010.0042	SV8-4	4	#8	4.3	9.0	7.2	30.0	16.0	4.5	8.0	1.2	500	Red 红色
A0111.010.0043	SV8-5	5	#10	5.3	9.0	8.1	30.0	16.0	4.5	8.0	1.2	500	
A0111.010.0044	SV8-6	6	1/4"	6.4	12.0	8.3	31.3	16.0	4.5	8.0	1.2	500	
A0111.010.0045	SV8-8	8	5/16"	8.4	13.8	10.7	32.9	16.0	4.5	8.0	1.2	500	
A0111.010.0046	SV8-10	10	3/8"	10.5	15.9	10.7	32.9	16.0	4.5	8.0	1.2	500	

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier


- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS

EASCO® SV Type Insulated Fork Terminal Lugs EASCO® 叉形预绝缘端头



Material: Red Copper with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V
材质: 紫铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	包装数(个)		
A0111.010.0047	SV14-4	4	#8	4.3	11.0	9.5	37.5	23.0	5.8	10.5	1.4	200	Blue 蓝色	
A0111.010.0048	SV14-5	5	#10	5.3	11.0	9.5	37.5	23.0	5.8	10.5	1.4	200		
A0111.010.0049	SV14-6	6	1/4"	6.4	12.0	9.5	40.2	23.0	5.8	10.5	1.4	200		
A0111.010.0050	SV14-8	8	5/16"	8.4	13.8	10.7	39.5	23.0	5.8	10.5	1.4	200		
A0111.010.0051	SV14-10	10	3/8"	10.5	15.9	10.7	39.5	23.0	5.8	10.5	1.4	200		
A0111.010.0052	SV22-5	5	#10	5.3	11.0	9.5	39.3	24.0	7.7	13.0	1.8	100	Yellow 黄色	
A0111.010.0053	SV22-6S	6	1/4"	6.4	11.0	9.5	39.3	24.0	7.7	13.0	1.8	100		
A0111.010.0054	SV22-6	6	1/4"	6.4	14.0	13.0	46.5	24.0	7.7	13.0	1.8	100		
A0111.010.0055	SV22-8	8	5/16"	8.4	14.0	13.0	46.5	24.0	7.7	13.0	1.8	100		

CE RoHS

EASCO® SNY Type Nylon Insulated Fork Terminal Lugs EASCO® 尼龙叉形预绝缘端头



Material: Red Copper with Nylon insulation.
Plating Material: Tin plating.
Max Working Temperature: 105°C
Max Voltage: 600V
材质: 紫铜, 尼龙
表面镀层: 镀锡
最大耐温: 105°C
最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	包装数(个)		
A0111.014.0001	SNY1.25-3.2	3	#4	3.2	5.7	6.5	22.2	11.0	1.7	4.3	0.7	1000	Red 红色	
A0111.014.0002	SNY1.25-3.5S	3.5	#6	3.7	5.7	6.5	22.2	11.0	1.7	4.3	0.7	1000		
A0111.014.0003	SNY1.25-3.5L	3.5	#6	3.7	6.4	6.5	22.2	11.0	1.7	4.3	0.7	1000		
A0111.014.0004	SNY1.25-4S	4	#8	4.3	6.4	6.5	22.2	11.0	1.7	4.3	0.7	1000		
A0111.014.0005	SNY1.25-4M	4	#8	4.3	7.2	6.5	22.2	11.0	1.7	4.3	0.7	1000		
A0111.014.0006	SNY1.25-4L	4	#8	4.3	8.1	6.5	22.2	11.0	1.7	4.3	0.7	1000		
A0111.014.0007	SNY1.25-5S	5	#10	5.3	8.1	6.5	22.2	11.0	1.7	4.3	0.7	1000		
A0111.014.0008	SNY1.25-5L	5	#10	5.3	9.5	6.5	22.2	11.0	1.7	4.3	0.7	1000		
A0111.014.0009	SNY1.25-6S	6	1/4"	6.4	9.5	6.5	22.2	11.0	1.7	4.3	0.7	1000		
A0111.014.0010	SNY1.25-6L	6	1/4"	6.4	12.0	11.0	28.2	11.0	1.7	4.3	0.7	1000		
A0111.014.0011	SNY1.25-8	8	5/16"	8.4	13.5	11.5	28.0	11.0	1.7	4.3	0.7	1000	Blue 蓝色	
A0111.014.0012	SNY2-3.2	3	#4	3.2	5.7	6.5	22.2	11.0	2.3	4.8	0.8	1000		
A0111.014.0013	SNY2-3.5S	3.5	#6	3.7	5.7	6.5	22.2	11.0	2.3	4.8	0.8	1000		
A0111.014.0014	SNY2-3.5L	3.5	#6	3.7	6.4	6.5	22.2	11.0	2.3	4.8	0.8	1000		
A0111.014.0015	SNY2-4S	4	#8	4.3	6.4	6.5	22.2	11.0	2.3	4.8	0.8	1000		
A0111.014.0016	SNY2-4M	4	#8	4.3	7.2	6.5	22.2	11.0	2.3	4.8	0.8	1000		
A0111.014.0017	SNY2-4L	4	#8	4.3	8.1	6.5	22.2	11.0	2.3	4.8	0.8	1000		
A0111.014.0018	SNY2-5S	4	#10	5.3	8.1	6.5	22.2	11.0	2.3	4.8	0.8	1000		
A0111.014.0019	SNY2-5L	5	#10	5.3	9.5	6.5	22.2	11.0	2.3	4.8	0.8	1000		

CE RoHS

EASCO® SNY Type Nylon Insulated Fork Terminal Lugs EASCO® 尼龙叉形预绝缘端头



Material: Red Copper with Nylon insulation.
Plating Material: Tin plating.
Max Working Temperature: 105°C
Max Voltage: 600V
材质: 紫铜, 尼龙
表面镀层: 镀锡
最大耐温: 105°C
最大电压: 600V



Article No.	Part No.	Stud Size 螺栓口直径 美制螺旋拴号		Dimension(尺寸)									Pkg Qty (pcs) 包装数(个)	Color 颜色
		Metric	American	d2	W	F	L	H	d1	D	T			
A0111.014.0020	SNY2-6S	6	1/4"	6.4	9.5	6.5	22.2	11.0	2.3	4.8	0.8	1000	Blue 蓝色	
A0111.014.0021	SNY2-6L	6	1/4"	6.4	12.0	11.0	28.2	11.0	2.3	4.8	0.8	1000		
A0111.014.0022	SNY2-8	8	5/16"	8.4	13.5	11.5	28.0	11.0	2.3	4.8	0.8	1000		
A0111.014.0023	SNY3.5-3	3	#4	3.2	5.7	7.0	24.6	13.0	2.9	6.2	1.0	500	Black 黑色	
A0111.014.0024	SNY3.5-3.5	3.5	#6	3.7	8.0	7.7	25.3	13.0	2.9	6.2	1.0	500		
A0111.014.0025	SNY3.5-4	4	#8	4.3	8.0	7.7	25.3	13.0	2.9	6.2	1.0	500		
A0111.014.0026	SNY3.5-5	5	#10	5.3	8.0	7.7	25.3	13.0	2.9	6.2	1.0	500		
A0111.014.0027	SNY3.5-6	6	1/4"	6.4	12.0	9.5	28.5	13.0	2.9	6.2	1.0	500		
A0111.014.0028	SNY3.5-8	8	5/16"	8.4	14.0	11.5	30.7	13.0	2.9	6.2	1.0	500		
A0111.014.0029	SNY5.5-3.5	3.5	#6	3.7	8.3	7.5	25.5	13.0	3.4	6.7	1.0	500		
A0111.014.0030	SNY5.5-4S	4	#8	4.3	8.3	7.5	25.5	13.0	3.4	6.7	1.0	500	Yellow 黄色	
A0111.014.0031	SNY5.5-4L	4	#8	4.3	9.0	7.5	25.5	13.0	3.4	6.7	1.0	500		
A0111.014.0032	SNY5.5-5	5	#10	5.3	9.0	7.5	25.5	13.0	3.4	6.7	1.0	500		
A0111.014.0033	SNY5.5-6S	6	1/4"	6.4	9.0	7.5	25.5	13.0	3.4	6.7	1.0	500		
A0111.014.0034	SNY5.5-6L	6	1/4"	6.4	12.0	12.0	31.7	13.0	3.4	6.7	1.0	500		
A0111.014.0035	SNY5.5-8	8	5/16"	8.4	14.0	11.5	30.7	13.0	3.4	6.7	1.0	500	Red 红色	
A0111.014.0036	SNY8-4	4	#8	4.3	9.0	7.6	28.3	16.0	4.5	8.0	1.2	500		
A0111.014.0037	SNY8-5	5	#10	5.3	9.0	8.1	28.3	16.0	4.5	8.0	1.2	500		
A0111.014.0038	SNY8-6	6	1/4"	6.4	12.0	9.2	31.3	16.0	4.5	8.0	1.2	500		
A0111.014.0039	SNY8-8	8	5/16"	8.4	13.8	10.7	32.9	16.0	4.5	8.0	1.2	500	Blue 蓝色	
A0111.014.0040	SNY8-10	10	3/8"	10.5	15.9	10.7	32.9	16.0	4.5	8.0	1.2	500		
A0111.014.0041	SNY14-4	4	#8	4.3	9.0	9.5	36.5	21.5	5.8	11.0	1.4	200		
A0111.014.0042	SNY14-5	5	#10	5.3	9.0	9.5	36.5	21.5	5.8	11.0	1.4	200		
A0111.014.0043	SNY14-6	6	1/4"	6.4	11.0	11.0	40.2	21.5	5.8	11.0	1.4	200		
A0111.014.0044	SNY14-8	8	5/16"	8.4	13.8	10.7	39.5	21.5	5.8	11.0	1.4	200	Yellow 黄色	
A0111.014.0045	SNY14-10	10	3/8"	10.5	15.9	10.7	39.5	21.5	5.8	11.0	1.4	200		
A0111.014.0046	SNY22-5	5	#10	5.3	11.0	9.5	39.3	23.5	7.7	13.0	1.8	100		
A0111.014.0047	SNY22-6	6	1/4"	6.4	11.0	9.5	39.3	23.5	7.7	13.0	1.8	100		
A0111.014.0048	SNY22-8	8	5/16"	8.4	13.5	13.5	45.0	23.5	7.7	13.0	1.8	100		

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut


A18. Nylon Cable Carrier

CE RoHS

EASCO® LSNB Type Non Insulated Fork Terminal Lugs (Lock In) EASCO® 锁扣叉形裸端头



Material: Red Copper
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V
材质: 紫铜
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	包装数 (个)	
A0111.012.0001	LSNB1.25-4	4	#8	4.3	7.2	6.5	16.0	4.8	1.7	3.4	0.7	1000	
A0111.012.0002	LSNB1.25-5S	5	#10	5.3	8.1	6.5	16.0	4.8	1.7	3.4	0.7	1000	
A0111.012.0003	LSNB2-3.5	3.5	#6	3.7	6.0	6.5	16.0	4.8	2.3	4.0	0.8	1000	
A0111.012.0004	LSNB2-4	4	#8	4.3	7.2	6.5	16.0	4.8	2.3	4.0	0.8	1000	
A0111.012.0005	LSNB2-5	5	#10	5.3	8.1	6.5	16.0	4.8	2.3	4.0	0.8	1000	
A0111.012.0006	LSNB5.5-4	4	#8	4.3	8.3	7.0	18.5	6.0	3.4	5.5	1.0	1000	
A0111.012.0007	LSNB5.5-5	5	#10	5.3	9.0	7.0	18.5	6.0	3.4	5.5	1.0	1000	
A0111.012.0008	LSNB5.5-6	6	1/4"	6.4	12.0	12.0	24.7	6.0	3.4	5.5	1.0	1000	

CE RoHS

EASCO® LSV Type Insulated Fork Terminal Lugs (Lock In) EASCO® 锁扣叉形预绝缘端头



Material: Red Copper with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V
材质: 紫铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	包装数 (个)		
A0111.013.0001	LSV1.25-3.5	3.5	#6	3.7	6.4	6.5	21.2	10	1.7	4.2	0.7	1000	Red 红色	
A0111.013.0002	LSV1.25-4	4	#8	4.3	7.2	6.5	21.2	10	1.7	4.2	0.7	1000		
A0111.013.0003	LSV1.25-5S	5	#10	5.3	8.1	6.5	21.2	10	1.7	4.2	0.7	1000		
A0111.013.0004	LSV2-3.5S	3.5	#6	3.7	6.0	6.5	21.2	10	2.3	4.7	0.8	1000	Blue 蓝色	
A0111.013.0005	LSV2-4	4	#8	4.3	7.2	6.5	21.2	10	2.3	4.7	0.8	1000		
A0111.013.0006	LSV2-5S	5	#10	5.3	8.1	6.5	21.2	10	2.3	4.7	0.8	1000		
A0111.013.0007	LSV5.5-4	4	#8	4.3	8.3	7	25.5	13	3.4	6.5	1	500	Yellow 黄色	
A0111.013.0008	LSV5.5-5	5	#10	5.3	9.0	7	25.5	13	3.4	6.5	1	500		
A0111.013.0009	LSV5.5-6	6	1/4"	6.4	12.0	12	31.7	13	3.4	6.5	1	500		

CE RoHS EASCO® FSV Type Insulated Flange Spade Terminal Lugs EASCO® 凸缘叉形预绝缘端头



Material: Red Copper with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V.
材质: 紫铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T		
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数 (个)	颜色
A0111.015.0001	FSV1.25-4	4	#8	4.3	7.5	5.1	19.5	10.5	1.7	4.2	0.7	1000	Red 红色
A0111.015.0002	FSV1.25-5	5	#10	5.3	7.5	5.1	19.5	10.5	1.7	4.2	0.7	1000	Red 红色
A0111.015.0003	FSV2-4	4	#8	4.3	7.5	5.2	20.2	10.5	2.3	4.7	0.8	1000	Blue 蓝色
A0111.015.0004	FSV2-5	5	#10	5.3	7.5	5.2	20.2	10.5	2.3	4.7	0.8	1000	Blue 蓝色
A0111.015.0005	FSV5.5-4	4	#8	4.3	8.5	7.5	27.0	13.5	3.4	6.5	1.0	500	Yellow 黄色
A0111.015.0006	FSV5.5-5	5	#10	5.3	8.5	7.5	27.0	13.5	3.4	6.5	1.0	500	Yellow 黄色

CE RoHS EASCO® FSN Type Nylon Insulated Flange Spade Terminal Lugs EASCO® 尼龙凸缘叉形预绝缘端头



Material: Red Copper with Nylon insulation.
Plating Material: Tin plating.
Max Working Temperature: 105°C
Max Voltage: 600V.
材质: 紫铜, 尼龙
表面镀层: 镀锡
最大耐温: 105°C
最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T		
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数 (个)	颜色
A0111.016.0001	FSNY1.25-3.5	3.5	#6	3.7	7.5	5.1	19.3	11.0	1.7	4.3	0.7	1000	Red 红色
A0111.016.0002	FSNY1.25-4	4	#8	4.3	7.5	5.1	19.3	11.0	1.7	4.3	0.7	1000	
A0111.016.0003	FSNY1.25-5	5	#10	5.3	7.5	5.1	19.3	11.0	1.7	4.3	0.7	1000	
A0111.016.0004	FSNY2-4	4	#8	4.3	7.5	5.2	21.2	11.0	2.3	4.8	0.8	1000	Blue 蓝色
A0111.016.0005	FSNY2-5	5	#10	5.3	7.5	5.2	21.2	11.0	2.3	4.8	0.8	1000	Blue 蓝色
A0111.016.0006	FSNY5.5-4	4	#8	4.3	8.5	7.5	27.0	13.0	3.4	6.7	1.0	500	Yellow 黄色
A0111.016.0007	FSNY5.5-5	5	#10	5.3	8.5	7.5	27.0	13.0	3.4	6.7	1.0	500	

CE RoHS EASCO® Easy Entry Insulated Spade Terminals (叉形预绝缘端头(易进线型))



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T			
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数(个)	颜色	
A0111.066.0001	SVE1.25-3.2	3	#4	3.2	5.7	6.5	21.2	10.0	1.7	4.2	0.7	1000	Red 红色	
A0111.066.0002	SVE1.25-3.5S	3.5	#6	3.7	5.7	6.5	21.2	10.0	1.7	4.2	0.7	1000		
A0111.066.0003	SVE1.25-3.5L	3.5	#6	3.7	6.4	6.5	21.2	10.0	1.7	4.2	0.7	1000		
A0111.066.0004	SVE1.25-4S	4	#8	4.3	6.4	6.5	21.2	10.0	1.7	4.2	0.7	1000		
A0111.066.0005	SVE1.25-4M	4	#8	4.3	7.2	6.5	21.2	10.0	1.7	4.2	0.7	1000		
A0111.066.0006	SVE1.25-4L	4	#8	4.3	8.1	6.5	21.2	10.0	1.7	4.2	0.7	1000		
A0111.066.0007	SVE1.25-5S	5	#10	5.3	8.1	6.5	21.2	10.0	1.7	4.2	0.7	1000		
A0111.066.0008	SVE1.25-5L	5	#10	5.3	9.5	6.5	21.2	10.0	1.7	4.2	0.7	1000		
A0111.066.0009	SVE1.25-6S	6	1/4"	6.4	9.5	6.5	21.2	10.0	1.7	4.2	0.7	1000		
A0111.066.0010	SVE1.25-6L	6	1/4"	6.4	12.0	11.0	27.2	10.0	1.7	4.2	0.7	1000		
A0111.066.0011	SVE1.25-8	8	5/16"	8.4	13.5	11.5	26.7	10.0	1.7	4.2	0.7	1000	Blue 蓝色	
A0111.066.0012	SVE2-3.2	3	#4	3.2	5.7	6.5	21.2	10.0	2.3	4.7	0.8	1000		
A0111.066.0013	SVE2-3.5S	3.5	#6	3.7	5.7	6.5	21.2	10.0	2.3	4.7	0.8	1000		
A0111.066.0014	SVE2-3.5L	3.5	#6	3.7	6.4	6.5	21.2	10.0	2.3	4.7	0.8	1000		
A0111.066.0015	SVE2-4S	4	#8	4.3	6.4	6.5	21.2	10.0	2.3	4.7	0.8	1000		
A0111.066.0016	SVE2-4M	4	#8	4.3	7.2	6.5	21.2	10.0	2.3	4.7	0.8	1000		
A0111.066.0017	SVE2-4L	4	#8	4.3	8.1	6.5	21.2	10.0	2.3	4.7	0.8	1000		
A0111.066.0018	SVE2-5S	5	#10	5.3	8.1	6.5	21.2	10.0	2.3	4.7	0.8	1000		
A0111.066.0019	SVE2-5L	5	#10	5.3	9.5	6.5	21.2	10.0	2.3	4.7	0.8	1000		
A0111.066.0020	SVE2-6S	6	1/4"	6.4	9.5	6.5	21.2	10.0	2.3	4.7	0.8	1000		
A0111.066.0021	SVE2-6L	6	1/4"	6.4	12.0	11.0	27.2	10.0	2.3	4.7	0.8	1000	Black 黑色	
A0111.066.0022	SVE2-8	8	5/16"	8.4	13.5	11.5	27.0	10.0	2.3	4.7	0.8	1000		
A0111.066.0023	SVE3.5-3	3	#4	3.2	5.7	7.0	25.3	13.0	2.9	6.2	1.0	500		
A0111.066.0024	SVE3.5-4	4.0	#8	4.3	8.0	7.7	25.3	13.0	2.9	6.2	1.0	500		
A0111.066.0025	SVE3.5-5	5.0	#10	5.3	8.0	7.7	25.3	13.0	2.9	6.2	1.0	500	Yellow 黄色	
A0111.066.0026	SVE3.5-6	6.0	1/4"	6.4	12.0	9.5	28.5	13.0	2.9	6.2	1.0	500		
A0111.066.0027	SVE3.5-8	8	5/16"	8.4	14.0	11.5	30.7	13.0	2.9	6.2	1.0	500		
A0111.066.0028	SVE5.5-3.5	3.5	#6	3.7	8.3	7.5	25.5	13.0	3.4	6.5	1.0	500		
A0111.066.0029	SVE5.5-4S	4	#8	4.3	8.3	7.5	25.5	13.0	3.4	6.5	1.0	500	Red 红色	
A0111.066.0030	SVE5.5-4L	4	#8	4.3	9.0	7.5	25.5	13.0	3.4	6.5	1.0	500		
A0111.066.0031	SVE5.5-5	5	#10	5.3	9.0	7.5	25.5	13.0	3.4	6.5	1.0	500		
A0111.066.0032	SVE5.5-6S	6	1/4"	6.4	9.0	7.5	25.5	13.0	3.4	6.5	1.0	500		
A0111.066.0033	SVE5.5-6L	6	1/4"	6.4	12.0	12.0	31.7	13.0	3.4	6.5	1.0	500	Blue 蓝色	
A0111.066.0034	SVE5.5-8	8	5/16"	8.4	14.0	11.5	30.7	13.0	3.4	6.5	1.0	500		
A0111.066.0035	SVE8-4	4	#8	4.3	9.0	7.2	28.3	16.0	4.5	8.0	1.2	500		
A0111.066.0036	SVE8-5	5	#10	5.3	9.0	8.1	28.3	16.0	4.5	8.0	1.2	500		
A0111.066.0037	SVE8-6	6	1/4"	6.4	12.0	8.3	31.3	16.0	4.5	8.0	1.2	500	Yellow 黄色	
A0111.066.0038	SVE8-8	8	5/16"	8.4	13.8	10.7	32.9	16.0	4.5	8.0	1.2	500		
A0111.066.0039	SVE8-10	10	3/8"	10.5	15.9	10.7	32.9	16.0	4.5	8.0	1.2	500		
A0111.066.0040	SVE14-4	4	#8	4.3	11.0	9.5	36.5	21.5	5.8	11.0	1.4	200		
A0111.066.0041	SVE14-5	5	#10	5.3	11.0	9.5	36.5	21.5	5.8	11.0	1.4	200	Blue 蓝色	
A0111.066.0042	SVE14-6	6	1/4"	6.4	12.0	9.5	40.2	21.5	5.8	11.0	1.4	200		
A0111.066.0043	SVE14-8	8	5/16"	8.4	13.8	10.7	39.5	21.5	5.8	11.0	1.4	200		
A0111.066.0044	SVE14-10	10	3/8"	10.5	15.9	10.7	39.5	21.5	5.8	11.0	1.4	200		
A0111.066.0045	SVE22-5	5	#10	5.3	11.0	9.5	39.3	23.5	7.7	13.0	1.6	100	Yellow 黄色	
A0111.066.0046	SVE22-6	6	1/4"	6.4	11.0	9.5	39.3	23.5	7.7	13.0	1.6	100		
A0111.066.0047	SVE22-8	8	5/16"	8.4	14.0	13.0	46.5	23.5	7.7	13.0	1.6	100		

CE RoHS EASCO® Vinyl-Insulated Spade Terminals Double Crimp EASCO® 双压接式叉形预绝缘接头



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V
 Double Crimp: With copper shiled.
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V
 双压接: 带有铜套




Article No.	Part No.	Stud Size 螺栓口直径 美制螺旋拴号		Dimension(尺寸)								Pkg Qty (pcs) 包装数(个)	Color 颜色
		Metric	American	d2	W	F	L	H	d1	D	T		
A0111.067.0001	RVD1.25-3.2	3	#4	3.2	5.7	6.5	21.2	10.0	1.7	4.5	0.7	1000	Red 红色
A0111.067.0002	RVD1.25-3.5S	3.5	#6	3.7	5.7	6.5	21.2	10.0	1.7	4.5	0.7	1000	
A0111.067.0003	RVD1.25-3.5L	3.5	#6	3.7	6.4	6.5	21.2	10.0	1.7	4.5	0.7	1000	
A0111.067.0004	RVD1.25-4S	4	#8	4.3	6.4	6.5	21.2	10.0	1.7	4.5	0.7	1000	
A0111.067.0005	RVD1.25-4M	4	#8	4.3	7.2	6.5	21.2	10.0	1.7	4.5	0.7	1000	
A0111.067.0006	RVD1.25-5S	5	#10	5.3	8.1	6.5	21.2	10.0	1.7	4.5	0.7	1000	
A0111.067.0007	RVD1.25-5L	5	#10	5.3	9.5	6.5	21.2	10.0	1.7	4.5	0.7	1000	
A0111.067.0008	RVD1.25-6S	6	1/4"	6.4	9.5	6.5	21.2	10.0	1.7	4.5	0.7	1000	
A0111.067.0009	RVD1.25-6L	6	1/4"	6.4	12.0	11.0	27.2	10.0	1.7	4.5	0.7	1000	
A0111.067.0010	RVD1.25-8	8	5/16"	8.4	13.5	11.5	26.7	10.0	1.7	4.5	0.7	1000	
A0111.067.0011	RVD2-3.2	3	#4	3.2	5.7	6.5	21.2	10.0	2.3	5.0	0.8	1000	Blue 蓝色
A0111.067.0012	RVD2-3.5S	3.5	#6	3.7	5.7	6.5	21.2	10.0	2.3	5.0	0.8	1000	
A0111.067.0013	RVD2-3.5L	3.5	#6	3.7	6.4	6.5	21.2	10.0	2.3	5.0	0.8	1000	
A0111.067.0014	RVD2-4S	4	#8	4.3	6.4	6.5	21.2	10.0	2.3	5.0	0.8	1000	
A0111.067.0015	RVD2-4M	4	#8	4.3	7.2	6.5	21.2	10.0	2.3	5.0	0.8	1000	
A0111.067.0016	RVD2-5S	5	#10	5.3	8.1	6.5	21.2	10.0	2.3	5.0	0.8	1000	
A0111.067.0017	RVD2-5L	5	#10	5.3	9.5	6.5	21.2	10.0	2.3	5.0	0.8	1000	
A0111.067.0018	RVD2-6S	6	1/4"	6.4	9.5	6.5	21.2	10.0	2.3	5.0	0.8	1000	
A0111.067.0019	RVD2-6L	6	1/4"	6.4	12.0	11.0	27.2	10.0	2.3	5.0	0.8	1000	
A0111.067.0020	RVD2-8	8	5/16"	8.4	13.5	11.5	27.0	10.0	2.3	5.0	0.8	1000	
A0111.067.0021	RVD5.5-3.5	3.5	#6	3.7	8.3	7.5	25.5	13.0	3.4	6.7	1.0	500	Yellow 黄色
A0111.067.0022	RVD5.5-4S	4	#8	4.3	8.3	7.5	25.5	13.0	3.4	6.7	1.0	500	
A0111.067.0023	RVD5.5-4L	4	#8	4.3	9.0	7.5	25.5	13.0	3.4	6.7	1.0	500	
A0111.067.0024	RVD5.5-5	5	#10	5.3	9.0	7.5	25.5	13.0	3.4	6.7	1.0	500	
A0111.067.0025	RVD5.5-6S	6	1/4"	6.4	9.0	7.5	25.5	13.0	3.4	6.7	1.0	500	
A0111.067.0026	RVD5.5-6L	6	1/4"	6.4	12.0	12.0	31.7	13.0	3.4	6.7	1.0	500	
A0111.067.0027	RVD5.5-8	8	5/16"	8.4	14.0	11.5	30.7	13.0	3.4	6.7	1.0	500	

CE RoHS EASCO® Nylon-Insulated Locking Spade Terminals (尼龙锁扣叉形预绝缘端头)



Material: Red Copper with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 105°C
 Max Voltage: 600V.
 材质: 尼龙, 紫铜
 表面镀层: 镀锡
 最大耐温: 105°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	包装数 (个)		
A0111.068.0001	LSNY1.25-4S	4	#8	4.3	7.5	6.5	22.2	11.0	1.7	4.3	0.7	1000	Red	
A0111.068.0002	LSNY1.25-5S	5	#10	5.3	8.1	6.5	22.2	11.0	1.7	4.3	0.7	1000	Red	
A0111.068.0003	LSNY2-3.5S	3.5	#6	3.7	6.0	6.5	22.2	11.0	2.3	4.8	0.8	1000	Blue	
A0111.068.0004	LSNY2-4	4	#8	4.3	7.2	6.5	22.2	11.0	2.3	4.8	0.8	1000		蓝色
A0111.068.0005	LSNY2-5S	5	#10	5.3	8.1	6.5	22.2	11.0	2.3	4.8	0.8	1000		蓝色
A0111.068.0006	LSNY5.5-4	4	#8	4.3	8.3	7.0	25.5	13.0	3.4	6.7	1.0	500	Yellow	
A0111.068.0007	LSNY5.5-5	5	#10	5.3	9.0	7.0	25.5	13.0	3.4	6.7	1.0	500		黄色
A0111.068.0008	LSNY5.5-6	6	1/4"	6.4	12.0	12.0	31.7	13.0	3.4	6.7	1.0	500		黄色

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS EASCO® SHB Heat Shrink Fork Terminals EASCO® 叉型预绝缘端头(热收缩型)



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Working Temperature: -55°C~+125°C
 Heat Shrinkable Temp.: +80°C
 Fully Shrinkable Min. Temp.: +130°C
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 操作温度: -55°C~125°C
 开始收缩温度: 80°C
 最低完全收缩温度: 130°C




Article No.	Part No.	Stud Size 螺栓口直径 美制螺旋拴号		Dimension(尺寸)								Pkg Qty (pcs) 包装数(个)	Color 颜色
		Metric	American	d2	W	F	L	H	d1	D	T		
A0111.069.0001	SHB1.25-3.2	3	#4	3.2	5.7	6.5	30.2	19	1.7	4.8	0.7	1000	Red 红色
A0111.069.0002	SHB1.25-3.5S	3.5	#6	3.7	5.7	6.5	30.2	19	1.7	4.8	0.7	1000	
A0111.069.0003	SHB1.25-3.5L	3.5	#6	3.7	6.4	6.5	30.2	19	1.7	4.8	0.7	1000	
A0111.069.0004	SHB1.25-4S	4	#8	4.3	6.4	6.5	30.2	19	1.7	4.8	0.7	1000	
A0111.069.0005	SHB1.25-4M	4	#8	4.3	7.2	6.5	30.2	19	1.7	4.8	0.7	1000	
A0111.069.0006	SHB1.25-5S	5	#10	5.3	8.1	6.5	30.2	19	1.7	4.8	0.7	1000	
A0111.069.0007	SHB1.25-5L	5	#10	5.3	9.5	6.5	30.2	19	1.7	4.8	0.7	1000	
A0111.069.0008	SHB1.25-6S	6	1/4"	6.4	9.5	6.5	30.2	19	1.7	4.8	0.7	1000	
A0111.069.0009	SHB1.25-6L	6	1/4"	6.4	12.0	11.0	29.9	19	1.7	4.8	0.7	1000	
A0111.069.0010	SHB1.25-8	8	5/16"	8.4	13.5	11.5	35.7	19	1.7	4.8	0.7	1000	
A0111.069.0011	SHB2-3.2	3	#4	3.2	5.7	6.5	30.2	19	2.3	5.8	0.8	1000	Blue 蓝色
A0111.069.0012	SHB2-3.5S	3.5	#6	3.7	5.7	6.5	30.2	19	2.3	5.8	0.8	1000	
A0111.069.0013	SHB2-3.5L	3.5	#6	3.7	6.0	6.5	30.2	19	2.3	5.8	0.8	1000	
A0111.069.0014	SHB2-4S	4	#8	4.3	6.4	6.5	30.2	19	2.3	5.8	0.8	1000	
A0111.069.0015	SHB2-4M	4	#8	4.3	7.2	6.5	30.2	19	2.3	5.8	0.8	1000	
A0111.069.0016	SHB2-5S	5	#10	5.3	8.1	6.5	30.2	19	2.3	5.8	0.8	1000	
A0111.069.0017	SHB2-5L	5	#10	5.3	9.5	6.5	30.2	19	2.3	5.8	0.8	1000	
A0111.069.0018	SHB2-6S	6	1/4"	6.4	9.5	6.5	30.2	19	2.3	5.8	0.8	1000	
A0111.069.0019	SHB2-6L	6	1/4"	6.4	12.0	11.0	36.2	19	2.3	5.8	0.8	1000	
A0111.069.0020	SHB2-8	8	5/16"	8.4	13.5	11.5	36	19	2.3	5.8	0.8	1000	
A0111.069.0021	SHB5.5-3.5	3.5	#6	3.7	8.3	7.0	34.5	22	3.4	7.5	1.0	500	Yellow 黄色
A0111.069.0022	SHB5.5-4S	4	#8	4.3	8.3	7.0	34.5	22	3.4	7.5	1.0	500	
A0111.069.0023	SHB5.5-4L	4	#8	4.3	9.0	7.0	34.5	22	3.4	7.5	1.0	500	
A0111.069.0024	SHB5.5-5	5	#10	5.3	9.0	7.0	34.5	22	3.4	7.5	1.0	500	
A0111.069.0025	SHB5.5-6S	6	1/4"	6.4	9.0	7.0	34.5	22	3.4	7.5	1.0	500	
A0111.069.0026	SHB5.5-6L	6	1/4"	6.4	12.0	12.0	40.7	22	3.4	7.5	1.0	500	
A0111.069.0027	SHB5.5-8	8	5/16"	8.4	14.0	11.5	39.7	22	3.4	7.5	1.0	500	

CE RoHS

EASCO® Non-Insulated Ring Terminals EASCO® 90°叉形裸端头




Material: Red Copper
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V
材质: 紫铜
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V



Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)
		螺柱口直径	美制螺旋拴号	d2	W	L	L1	H	d1	D	T	包装数 (个)	
		Metric	American										
		货号	型号										
A0111.064.0001	90D-SNB3.5-3	3	#4	3.2	5.7	16.3	8.5	6.0	3.0	5.0	1.0	1000	
A0111.064.0002	90D-SNB3.5-3.7	3.5	#6	3.7	8.0	16.3	8.5	6.0	3.0	5.0	1.0	1000	
A0111.064.0003	90D-SNB3.5-4S	4	#8	4.3	7.2	16.3	8.5	6.0	3.0	5.0	1.0	1000	
A0111.064.0004	90D-SNB3.5-4	4	#8	4.3	8.0	16.3	8.5	6.0	3.0	5.0	1.0	1000	
A0111.064.0005	90D-SNB3.5-5	5	#10	5.3	8.0	16.3	8.5	6.0	3.0	5.0	1.0	1000	
A0111.064.0006	90D-SNB3.5-6	6	1/4"	6.4	12.0	19.5	8.5	6.0	3.0	5.0	1.0	1000	
A0111.064.0007	90D-SNB3.5-8	8	5/16"	8.4	14.0	21.7	8.5	6.0	3.0	5.0	1.0	1000	
A0111.064.0008	90D-SNB3.5-10	10	3/8"	10.5	17.5	24.5	8.5	6.0	3.0	5.0	1.0	1000	
A0111.064.0009	90D-SNB5.5-3	3	#4	3.2	6.8	17.5	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0010	90D-SNB5.5-3.7S	3.5	#6	3.7	6.8	17.5	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0011	90D-SNB5.5-3.7	3.5	#6	3.7	8.3	17.5	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0012	90D-SNB5.5-4SS	4	#8	4.3	7.2	15.4	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0013	90D-SNB5.5-4S	4	#8	4.3	8.3	17.5	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0014	90D-SNB5.5-4L	4	#8	4.3	9.0	17.5	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0015	90D-SNB5.5-5	5	#10	5.3	9.0	17.5	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0016	90D-SNB5.5-6S	6	1/4"	6.4	9.0	17.5	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0017	90D-SNB5.5-6L	6	1/4"	6.4	12.0	23.5	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0018	90D-SNB5.5-8	8	5/16"	8.4	14.0	22.5	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0019	90D-SNB5.5-10	10	3/8"	10.5	17.5	24.5	9.3	6.8	3.5	5.5	1.0	1000	
A0111.064.0020	90D-SNB8-4S	4	#8	4.3	7.2	18.6	11.7	8.5	4.8	7.2	1.2	500	
A0111.064.0021	90D-SNB8-4	4	#8	4.3	9.0	18.6	11.7	8.5	4.8	7.2	1.2	500	
A0111.064.0022	90D-SNB8-5	5	#10	5.3	9.0	18.6	11.7	8.5	4.8	7.2	1.2	500	
A0111.064.0023	90D-SNB8-6	6	1/4"	6.4	12.0	22.3	11.7	8.5	4.8	7.2	1.2	500	
A0111.064.0024	90D-SNB8-8	8	5/16"	8.4	13.8	23.2	11.7	8.5	4.8	7.2	1.2	500	
A0111.064.0025	90D-SNB8-10	10	3/8"	10.5	15.9	23.2	11.7	8.5	4.8	7.2	1.2	500	
A0111.064.0026	90D-SNB14-4	4	#8	4.3	11.0	23.1	13.5	10.5	6.0	9	1.4	500	
A0111.064.0027	90D-SNB14-5	5	#10	5.3	11.0	23.1	13.5	10.5	6.0	9	1.4	500	
A0111.064.0028	90D-SNB14-6	6	1/4"	6.4	12.0	26.1	13.5	10.5	6.0	9	1.4	500	
A0111.064.0029	90D-SNB14-8	8	5/16"	8.4	13.8	26.1	13.5	10.5	6.0	9	1.4	500	
A0111.064.0030	90D-SNB14-10	10	3/8"	10.5	15.9	26.1	13.5	10.5	6.0	9	1.4	500	
A0111.064.0031	90D-SNB22-5	5	#10	5.3	11.0	25	15.8	12	7.7	11.5	1.8	200	
A0111.064.0032	90D-SNB22-6S	6	1/4"	6.4	11.0	25	15.8	12	7.7	11.5	1.8	200	
A0111.064.0033	90D-SNB22-6	6	1/4"	6.4	14.0	30.7	15.8	12	7.7	11.5	1.8	200	
A0111.064.0034	90D-SNB22-8	8	5/16"	8.4	14.0	30.7	15.8	12	7.7	11.5	1.8	200	
A0111.064.0035	90D-SNB22-10	10	3/8"	10.5	14.0	30.7	15.8	12	7.7	11.5	1.8	200	

CE RoHS EASCO® Fork Cold Press Terminal (叉形冷压端头)

Material: Red Copper. (材质: 紫铜)




Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs) 包装数 (个)
		Φ	B	L	E	D	C	T	
A0111.065.0001	UT0.5-3	3.2	6.0	13.5	4.0	2.2	1.2	0.5	2000
A0111.065.0002	UT0.5-4	4.2	7.0	13.8	4.0	2.2	1.2	0.5	2000
A0111.065.0003	UT1-3	3.2	5.7	15.5	5.0	3.2	1.8	0.7	1000
A0111.065.0004	UT1-4	4.2	7.0	16.0	5.0	3.2	1.8	0.7	1000
A0111.065.0005	UT1.5-3	3.2	5.9	15.5	5.0	3.6	2.2	0.7	1000
A0111.065.0006	UT1.5-4	4.2	7.3	16.5	5.0	3.6	2.2	0.7	1000
A0111.065.0007	UT1.5-5	5.2	9.2	18.3	5.0	3.6	2.2	0.7	1000
A0111.065.0008	UT1.5-6	6.2	11.8	20.0	5.0	3.6	2.2	0.7	1000
A0111.065.0009	UT1.5-8	8.2	14.6	23.7	5.0	3.6	2.2	0.7	1000
A0111.065.0010	UT2.5-3	3.2	6.0	15.5	5.0	4.2	2.8	0.7	1000
A0111.065.0011	UT2.5-4	4.2	7.6	17.0	5.0	4.2	2.8	0.7	1000
A0111.065.0012	UT2.5-5	5.2	9.5	18.0	5.0	4.2	2.8	0.7	1000
A0111.065.0013	UT2.5-6	6.2	11.0	20.0	5.0	4.2	2.8	0.7	1000
A0111.065.0014	UT2.5-8	8.2	14.8	24.1	5.0	4.2	2.8	0.7	1000
A0111.065.0015	UT4-4	4.2	8.6	18.6	8.0	5.2	3.2	1.0	1000
A0111.065.0016	UT4-5	5.2	9.4	19.6	8.0	5.2	3.2	1.0	1000
A0111.065.0017	UT4-6	6.2	11.8	22.1	8.0	5.2	3.2	1.0	1000
A0111.065.0018	UT4-8	8.2	14.9	25.2	8.0	5.2	3.2	1.0	1000
A0111.065.0019	UT4-10	10.5	18.0	27.0	8.0	5.2	3.2	1.0	500
A0111.065.0020	UT6-4	4.2	9.0	19.5	7.0	5.2	4.2	1.0	1000
A0111.065.0021	UT6-5	5.2	11.0	21.0	7.0	5.2	4.2	1.0	1000
A0111.065.0022	UT6-6	6.2	12.0	23.0	7.0	5.2	4.2	1.0	1000
A0111.065.0023	UT6-8	8.2	15.0	26.0	7.0	5.2	4.2	1.0	1000
A0111.065.0024	UT6-10	10.5	17.4	30.0	7.0	5.2	4.2	1.0	500
A0111.065.0025	UT10-4	4.2	10.0	24.0	8.5	8.0	5.6	1.2	500
A0111.065.0026	UT10-5	5.2	10.0	24.0	8.5	8.0	5.6	1.2	500
A0111.065.0027	UT10-6	6.2	12.0	27.0	8.5	8.0	5.6	1.2	500
A0111.065.0028	UT10-8	8.2	14.4	28.6	8.5	8.0	5.6	1.2	500
A0111.065.0029	UT10-10	10.5	16.3	31.5	8.5	8.0	5.6	1.2	500
A0111.065.0030	UT16-5	5.2	11.5	26.0	11.0	10.0	7.0	1.5	200
A0111.065.0031	UT16-6	6.2	12.5	29.5	11.0	10.0	7.0	1.5	200
A0111.065.0032	UT16-8	8.2	16.0	32.0	11.0	10.0	7.0	1.5	200
A0111.065.0033	UT16-10	10.5	19.0	33.5	11.0	10.0	7.0	1.5	200
A0111.065.0034	UT25-6	6.2	16.0	35.0	14.0	12.1	8.5	1.8	200
A0111.065.0035	UT25-8	8.2	18.0	35.0	14.0	12.1	8.5	1.8	200
A0111.065.0036	UT25-10	10.5	20.0	35.0	14.0	12.1	8.5	1.8	200
A0111.065.0037	UT35-6	6.2	14.5	36.0	14.0	13.1	9.5	1.8	200
A0111.065.0038	UT35-8	8.2	17.5	40.0	14.0	13.1	9.5	1.8	200
A0111.065.0039	UT35-10	10.5	22.0	42.0	14.0	13.1	9.5	1.8	200

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS EASCO® FDD Type Insulated Flag Female Disconnects (母绝缘接头)



Material: Brass with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 300V
 材质: 黄铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 300V




Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
			W	L	H	d1	D	T		
货号	型号	插线规格	W	L	H	d1	D	T	包装数 (个)	颜色
A0111.017.0001	FDD1.25-110(5)	0.5X2.8	3.8	19.0	10.0	1.7	3.7	0.3	1000	Red 红色
A0111.017.0002	FDD1.25-110(8)	0.8X2.8	3.8	19.0	10.0	1.7	3.7	0.3	1000	
A0111.017.0003	FDD1.25-187(5)	0.5X4.75	5.8	19.0	10.0	1.7	3.7	0.35	1000	
A0111.017.0004	FDD1.25-187(8)	0.8X4.75	5.8	19.0	10.0	1.7	3.7	0.35	1000	
A0111.017.0005	FDD1.25-205(5)	0.5X5.2	6.5	19.0	10.0	1.7	3.7	0.35	1000	
A0111.017.0006	FDD1.25-250	0.8X6.35	7.5	21.0	10.0	1.7	3.7	0.4	1000	
A0111.017.0007	FDD1.25-312	0.8X8.0	9.1	24.0	10.0	1.7	3.7	0.4	1000	Blue 蓝色
A0111.017.0008	FDD2-110(5)	0.5X2.8	3.8	19.0	10.0	2.3	4.3	0.3	1000	
A0111.017.0009	FDD2-110(8)	0.8X2.8	3.8	19.0	10.0	2.3	4.3	0.3	1000	
A0111.017.0010	FDD2-187(5)	0.5X4.75	5.8	19.0	10.0	2.3	4.3	0.35	1000	
A0111.017.0011	FDD2-187(8)	0.8X4.75	5.8	19.0	10.0	2.3	4.3	0.35	1000	
A0111.017.0012	FDD2-205(5)	0.5X5.2	6.5	19.0	10.0	2.3	4.3	0.35	1000	
A0111.017.0013	FDD2-205(8)	0.8X5.2	6.5	19.3	10.0	2.3	4.3	0.35	1000	Yellow 黄色
A0111.017.0014	FDD2-250	0.8X6.35	7.5	21.0	10.0	2.3	4.3	0.4	1000	
A0111.017.0015	FDD2-312	0.8X8.0	9.1	24.0	10.0	2.3	4.3	0.4	1000	
A0111.017.0016	FDD2-375	1.2X9.4	10.0	26.1	10.0	2.3	4.3	0.5	1000	
A0111.017.0017	FDD5.5-110(5)	0.5X2.8	3.2	22.0	13.0	3.4	5.6	0.4	500	Yellow 黄色
A0111.017.0018	FDD5.5-110(8)	0.8X2.8	3.2	22.0	13.0	3.4	5.6	0.4	500	
A0111.017.0019	FDD5.5-187(5)	0.5X4.75	5.8	22.0	13.0	3.4	5.6	0.4	500	
A0111.017.0020	FDD5.5-187(8)	0.8X4.75	5.8	22.0	13.0	3.4	5.6	0.4	500	
A0111.017.0021	FDD5.5-250	0.8X6.35	7.5	24.0	13.0	3.4	5.6	0.4	500	
A0111.017.0022	FDD5.5-312	0.8X8.0	8.2	27.0	13.0	3.4	5.6	0.4	500	
A0111.017.0023	FDD5.5-375	1.2X9.4	10.9	28.6	13.0	3.4	5.6	0.5	500	

CE RoHS EASCO® MDD Type Insulated Male Terminal Lugs (公绝缘接头)



Material: Brass with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 300V
 材质: 黄铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 300V




Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
			W	L	H	d1	D	T		
货号	型号	插线规格	W	L	H	d1	D	T	包装数 (个)	颜色
A0111.018.0001	MDD1.25-110(5)	0.5X2.8	2.8	19.0	10.0	1.7	3.7	0.5	1000	Red 红色
A0111.018.0002	MDD1.25-110(8)	0.8X2.8	2.8	19.0	10.0	1.7	3.7	0.4	1000	
A0111.018.0003	MDD1.25-187(5)	0.5X4.75	4.75	19.0	10.0	1.7	3.7	0.5	1000	
A0111.018.0004	MDD1.25-187(8)	0.8X4.75	4.75	19.0	10.0	1.7	3.7	0.4	1000	
A0111.018.0005	MDD1.25-250	0.8X6.35	6.35	21.0	10.0	1.7	3.7	0.4	1000	Blue 蓝色
A0111.018.0006	MDD2-110(5)	0.5X2.8	2.8	19.0	10.0	2.3	4.3	0.5	1000	
A0111.018.0007	MDD2-110(8)	0.8X2.8	2.8	19.0	10.0	2.3	4.3	0.5	1000	
A0111.018.0008	MDD2-187(5)	0.5X4.75	4.75	19.0	10.0	2.3	4.3	0.4	1000	
A0111.018.0009	MDD2-187(8)	0.8X4.75	4.75	19.0	10.0	2.3	4.3	0.4	1000	
A0111.018.0010	MDD2-250	0.8X6.35	6.35	21.0	10.0	2.3	4.3	0.4	1000	Yellow 黄色
A0111.018.0011	MDD5.5-187(5)	0.8X4.75	4.8	23.5	13.0	3.4	5.6	0.4	500	
A0111.018.0012	MDD5.5-250	0.8X6.35	6.35	25.0	13.0	3.4	5.6	0.4	500	

CE RoHS EASCO® MDNY Type Nylon Insulated Male Terminal Lugs (尼龙公预绝缘接头)



Material: Brass with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 105°C
 Max Voltage: 300V
 材质: 黄铜, 尼龙
 表面镀层: 镀锡
 最大耐温: 105°C
 最大电压: 300V




Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
			W	L	H	d1	D	T		
货号	型号	插线规格	W	L	H	d1	D	T	包装数 (个)	颜色
A0111.019.0001	MDNY1.25-110(5)	0.5X2.8	2.8	20.0	11.0	1.7	3.8	0.5	1000	Red 红色
A0111.019.0002	MDNY1.25-110(8)	0.8X2.8	2.8	20.0	11.0	1.7	3.8	0.4	1000	
A0111.019.0003	MDNY1.25-187(5)	0.5X4.75	4.75	20.0	11.0	1.7	3.8	0.5	1000	
A0111.019.0004	MDNY1.25-187(8)	0.8X4.75	4.75	20.0	11.0	1.7	3.8	0.4	1000	
A0111.019.0005	MDNY1.25-250	0.8X6.35	6.35	22.0	11.0	1.7	3.8	0.4	1000	Blue 蓝色
A0111.019.0006	MDNY2-187(5)	0.5X4.75	4.75	20.0	11.0	2.3	4.3	0.5	1000	
A0111.019.0007	MDNY2-187(8)	0.8X4.75	4.75	20.0	11.0	2.3	4.3	0.4	1000	
A0111.019.0008	MDNY2-250	0.8X6.35	6.35	22.0	11.0	2.3	4.3	0.4	1000	
A0111.019.0009	MDNY5.5-250	0.8X6.35	6.35	25.0	13.0	3.4	6.2	0.4	500	Yellow 黄色

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS EASCO® FLDNY Type Insulated Flag Female Disconnects (尼龙母预绝缘接头)



Material: Brass with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 105°C
 Max Voltage: 300V
 材质: 黄铜, 尼龙
 表面镀层: 镀锡
 最大耐温: 105°C
 最大电压: 300V




Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
			W	L	H	d1	D	T		
货号	型号	插线规格	W	L	H	d1	D	T	包装数 (个)	颜色
A0111.020.0001	FDNY1.25-110(5)	0.5X2.8	3.8	20.0	11.0	1.7	3.8	0.3	1000	Red 红色
A0111.020.0002	FDNY1.25-110(8)	0.8X2.8	3.8	20.0	11.0	1.7	3.8	0.3	1000	
A0111.020.0003	FDNY1.25-187(5)	0.5X4.75	5.8	20.0	11.0	1.7	3.8	0.35	1000	
A0111.020.0004	FDNY1.25-187(8)	0.8X4.75	5.8	20.0	11.0	1.7	3.8	0.35	1000	
A0111.020.0005	FDNY1.25-205(5)	0.5X5.2	6.5	20.0	11.0	1.7	3.8	0.35	1000	
A0111.020.0006	FDNY1.25-205(8)	0.8X5.2	6.5	20.0	11.0	1.7	3.8	0.35	1000	
A0111.020.0007	FDNY1.25-250	0.8X6.35	7.5	22.0	11.0	1.7	3.8	0.4	1000	Blue 蓝色
A0111.020.0008	FDNY1.25-312	0.8X8.0	9.1	25.0	11.0	1.7	3.8	0.4	500	
A0111.020.0009	FDNY2-110(5)	0.5X2.8	3.8	20.0	11.0	2.3	4.3	0.3	1000	
A0111.020.0010	FDNY2-110(8)	0.8X2.8	3.8	20.0	11.0	2.3	4.3	0.3	1000	
A0111.020.0011	FDNY2-187(5)	0.5X4.75	5.6	20.0	11.0	2.3	4.3	0.35	1000	
A0111.020.0012	FDNY2-187(8)	0.8X4.75	5.6	20.0	11.0	2.3	4.3	0.35	1000	
A0111.020.0013	FDNY2-205(5)	0.5X5.2	6.5	20.0	11.0	2.3	4.3	0.35	1000	Yellow 黄色
A0111.020.0014	FDNY2-205(8)	0.8X5.2	6.5	20.0	11.0	2.3	4.3	0.4	1000	
A0111.020.0015	FDNY2-250	0.8X6.35	7.5	22.0	11.0	2.3	4.3	0.4	1000	
A0111.020.0016	FDNY2-312	0.8X8.0	9.1	25.0	11.0	2.3	4.3	0.4	500	
A0111.020.0017	FDNY5.5-187	0.8X4.75	5.6	20.0	13.0	3.4	6.2	0.4	500	
A0111.020.0018	FDNY5.5-250	0.8X6.35	7.5	24.0	13.0	3.4	6.2	0.4	500	
A0111.020.0019	FDNY5.5-312	0.8X8.0	9.1	26.5	13.0	3.4	6.2	0.5	500	
A0111.020.0020	FDNY5.5-375	1.2X9.4	10.9	28.6	13.0	3.4	6.2	0.5	500	

CE RoHS EASCO® Nylon-Insulated Flange Female Quick Disconnects (旗形母全绝缘接头)



Material: Brass with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 105°C
 Max Voltage: 300V
 材质: 黄铜, 尼龙
 表面镀层: 镀锡
 最大耐温: 105°C
 最大电压: 300V

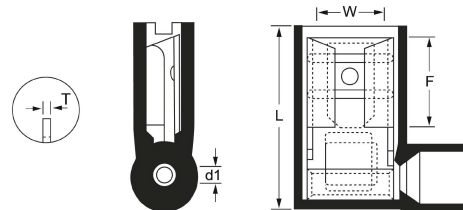


Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
			W	L	H	d1	T			
货号	型号	插线规格	W	L	H	d1	T	包装数 (个)	颜色	
A0111.021.0001	FLDNY1.25-250	0.8X6.35	7.5	8.4	16.0	1.7	0.5	500	Red 红色	
A0111.021.0002	FLDNY2-250	0.8X6.35	7.5	8.4	16.0	2.3	0.5	500	Blue 蓝色	
A0111.021.0003	FLDNYD5.5-250	0.8X6.35	7.5	7.3	18.0	3.4	0.4	500	Yellow 黄色	

CE RoHS EASCO® PBDNY Type Nylon Insulated Piggy Back Disconnects EASCO® 肩背形母预绝缘接头



Material: Brass with Nylon insulation.
Plating Material: Tin plating.
Max Working Temperature: 105°C
Max Voltage: 300V
材质: 黄铜, 尼龙
表面镀层: 镀锡
最大耐温: 105°C
最大电压: 300V




Article No.	Part No.	Cable Range	Dimension(尺寸)							Pkg Qty (pcs)	Color
货号	型号	插线规格	W	W1	L	H	d1	D	T	包装数(个)	颜色
A0111.022.0001	PBDNY1.25-250	0.8X6.35	7.5	6.3	22.5	11.0	1.7	4.0	0.4	500	Red 红色
A0111.022.0002	PBDNY2-250	0.8X6.35	7.5	6.3	22.5	11.0	2.3	4.8	0.4	500	Blue 蓝色
A0111.022.0003	PBDNY5.5-250	0.8X6.35	7.5	6.3	24.0	13.0	3.4	6.5	0.4	500	Yellow 黄色

CE RoHS EASCO® PBDD Type Insulated Piggy Back Disconnects EASCO® 肩背型公母绝缘接头



Material: Brass with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 300V
材质: 黄铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 300V




Article No.	Part No.	Cable Range	Dimension(尺寸)							Pkg Qty (pcs)	Color
货号	型号	插线规格	W	W1	L	H	d1	D	T	包装数(个)	颜色
A0111.023.0001	PBDD1.25-250	0.8X6.35	7.5	6.3	21.5	10.0	1.7	3.8	0.4	500	Red 红色
A0111.023.0002	PBDD2-250	0.8X6.35	7.5	6.3	21.5	10.0	2.3	4.3	0.4	500	Blue 蓝色
A0111.023.0003	PBDD5.5-250	0.8X6.35	7.5	6.3	24.0	13.0	3.4	5.6	0.4	500	Yellow 黄色

CE RoHS EASCO® MDFNY Type Nylon Insulated Male Lugs EASCO® 公全绝缘接头



Material: Brass with Nylon insulation.
Plating Material: Tin plating.
Max Working Temperature: 105°C
Max Voltage: 300V
材质: 黄铜, 尼龙
表面镀层: 镀锡
最大耐温: 105°C
最大电压: 300V



Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
货号	型号	插线规格	W	L	H	d1	D	T	包装数(个)	颜色
A0111.024.0001	MDFNY1.25-250	0.8X6.35	6.35	24.5	11.0	1.7	4.0	0.8	500	Red 红色
A0111.024.0002	MDFNY2-250	0.8X6.35	6.35	24.5	11.0	2.3	4.5	0.8	500	Blue 蓝色
A0111.024.0003	MDFNY5.5-250	0.8X6.35	6.35	26.0	13.0	3.4	5.5	0.8	500	Yellow 黄色

A1. Wiring Ducts

CE RoHS EASCO® FDFNY Type Nylon Insulated Female Lugs (母全绝缘接头)

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool


A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier



Material: Brass with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 105°C
 Max Voltage: 300V
 材质: 黄铜, 尼龙
 表面镀层: 镀锡
 最大耐温: 105°C
 最大电压: 300V




Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
			W	L	H	d1	D	T		
货号	型号	插线规格	W	L	H	d1	D	T	包装数 (个)	颜色
A0111.025.0001	DFDNY1.25-250	0.8X6.35	6.6	22.0	11.0	1.7	4.0	0.4	500	Red 红色
A0111.025.0002	DFDNY2-250	0.8X6.35	6.6	22.0	11.0	2.3	4.5	0.4	500	Blue 蓝色
A0111.025.0003	DFDNY5.5-250	0.8X6.35	6.6	24.5	12.0	3.4	5.5	0.4	500	Yellow 黄色

CE RoHS EASCO® MDFN Type Nylon Fully Insulated Male Lugs (公全绝缘接头)



Material: Brass with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 105°C
 Max Voltage: 300V
 材质: 黄铜, 尼龙
 表面镀层: 镀锡
 最大耐温: 105°C
 最大电压: 300V




Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
			W	L	H	d1	D	T		
货号	型号	插线规格	W	L	H	d1	D	T	包装数 (个)	颜色
A0111.026.0001	MDFN1.25-250	0.8X6.35	6.35	24.0	11.0	1.7	4.0	0.8	500	Red 红色
A0111.026.0002	MDFN2-250	0.8X6.35	6.35	24.0	11.0	2.3	4.5	0.8	500	Blue 蓝色
A0111.026.0003	MDFN5.5-250	0.8X6.35	6.35	25.0	13.0	3.4	6.3	0.4	500	Yellow 黄色

CE RoHS EASCO® FDFN Type Insulated Female Lugs (Heat Shrinkable) (母全绝缘接头)



Material: Brass with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 105°C
 Max Voltage: 300V
 材质: 黄铜, 尼龙
 表面镀层: 镀锡
 最大耐温: 105°C
 最大电压: 300V



Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
			W	L	H	d1	D	T		
货号	型号	插线规格	W	L	H	d1	D	T	包装数 (个)	颜色
A0111.027.0001	DFDNY1.25-110(5)	0.5X2.8	3.8	20.0	11.0	1.7	4.0	0.3	1000	Red 红色
A0111.027.0002	DFDNY1.25-187(5)	0.5X4.75	5.8	20.2	11.0	1.7	4.0	0.35	1000	
A0111.027.0003	DFDNY1.25-187(8)	0.8X4.75	5.8	20.2	11.0	1.7	4.0	0.35	1000	
A0111.027.0004	DFDNY1.25-250	0.8X6.35	7.5	22.0	11.0	1.7	4.0	0.4	1000	Blue 蓝色
A0111.027.0005	DFDNY2-187(5)	0.5X4.75	5.8	20.2	11.0	2.3	4.5	0.35	1000	
A0111.027.0006	DFDNY2-187(8)	0.8X4.75	5.8	20.2	11.0	2.3	4.5	0.35	1000	
A0111.027.0007	DFDNY2-250	0.8X6.35	7.5	22.0	11.0	2.3	4.5	0.4	1000	
A0111.027.0008	DFDNY5.5-250	0.8X6.35	7.5	24.0	13.0	3.4	6.3	0.4	500	Yellow 黄色


CE RoHS

EASCO® MDH Type Insulated Male Lugs (Heat Shrinkable)

EASCO® 公预绝缘接头(热收缩型)



Material: Brass with PE insulation.
 Plating Material: Tin plating.
 Working Temperature: -55°C~+125°C
 Heat Shrinkable Temp.: +80°C
 Fully Shrinkable Min. Temp.: +130°C
 材质: 黄铜, 聚乙烯
 表面镀层: 镀锡
 操作温度: -55°C~125°C
 开始收缩温度: 80°C
 最低完全收缩温度: 130°C



Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
			W	L	H	d1	D	T		
货号	型号	插线规格							包装数 (个)	颜色
A0111.030.0001	MDH1.25-110(5)	0.5X2.8	11.8	28	19	1.7	4.7	0.5	1000	Red 红色
A0111.030.0002	MDH1.25-110(8)	0.8X2.8	11.8	28	19	1.7	4.7	0.4	1000	
A0111.030.0003	MDH1.25-187(5)	0.5X4.75	13.75	28	19	1.7	4.7	0.5	1000	
A0111.030.0004	MDH1.25-187(8)	0.8X4.75	13.75	28	19	1.7	4.7	0.4	1000	
A0111.030.0005	MDH1.25-250	0.8X6.35	15.35	30	19	1.7	4.7	0.4	1000	Blue 蓝色
A0111.030.0006	MDH2-110(5)	0.5X4.75	11.8	28	19	2.3	6	0.5	1000	
A0111.030.0007	MDH2-110(8)	0.8X2.8	11.8	28	19	2.3	6	0.5	1000	
A0111.030.0008	MDH2-187(5)	0.5X4.75	13.75	28	19	2.3	6	0.4	1000	
A0111.030.0009	MDH2-187(8)	0.8X4.75	13.75	28	19	2.3	6	0.4	1000	
A0111.030.0010	MDH2-250	0.8X6.35	15.35	30	19	2.3	6	0.4	1000	
A0111.030.0011	MDH5.5-187(8)	0.8X4.75	13.8	32.5	22	3.4	7.5	0.4	500	Yellow 黄色
A0111.030.0012	MDH5.5-250	0.8X6.35	15.35	34	22	3.4	7.5	0.4	500	


- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS

EASCO® FDH Type Insulated Female Lugs (Heat Shrinkable) EASCO® 母预绝缘接头(热收缩型)



Material: Brass with PE insulation.
Plating Material: Tin plating.
Working Temperature: -55°C~+125°C
Heat Shrinkable Temp.: +80°C
Fully Shrinkable Min. Temp.: +130°C
材质: 黄铜, 聚乙烯
表面镀层: 镀锡
操作温度: -55°C~125°C
开始收缩温度: 80°C
最低完全收缩温度: 130°C




	Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
	货号	型号	插线规格	W	L	H	d1	D	T	包装数 (个)	颜色
A6. Wrapping Bands	A0111.031.0001	FDH1.25-110(5)	0.5X2.8	3.8	28.0	19.0	1.7	4.7	0.3	1000	Red 红色
	A0111.031.0002	FDH1.25-110(8)	0.8X2.8	3.8	28.0	19.0	1.7	4.7	0.3	1000	
	A0111.031.0003	FDH1.25-187(5)	0.5X4.75	5.8	28.0	19.0	1.7	4.7	0.35	1000	
	A0111.031.0004	FDH1.25-187(8)	0.8X4.75	5.8	28.0	19.0	1.7	4.7	0.35	1000	
A7. Nylon Cable Gland	A0111.031.0005	FDH1.25-205(5)	0.5X5.2	6.5	28.0	19.0	1.7	4.7	0.35	1000	Blue 蓝色
	A0111.031.0006	FDH1.25-250	0.8X6.35	7.5	30.0	19.0	1.7	4.7	0.4	1000	
	A0111.031.0007	FDH1.25-312	0.8X8.0	9.1	33.0	19.0	1.7	4.7	0.4	1000	
A8. Metal Cable Gland	A0111.031.0008	FDH2-110(5)	0.5X2.8	3.8	28.0	19.0	2.3	6.0	0.3	1000	Blue 蓝色
	A0111.031.0009	FDH2-110(8)	0.8X2.8	3.8	28.0	19.0	2.3	6.0	0.3	1000	
	A0111.031.0010	FDH2-187(5)	0.5X4.75	5.8	28.0	19.0	2.3	6.0	0.35	1000	
	A0111.031.0011	FDH2-187(8)	0.8X4.75	5.8	28.0	19.0	2.3	6.0	0.35	1000	
A9. Plastic Flexible Conduit	A0111.031.0012	FDH2-205 (5)	0.5X5.2	6.5	28.0	19.0	2.3	6.0	0.35	1000	Blue 蓝色
	A0111.031.0013	FDH2-205(8)	0.8X6.35	5.7	28.3	19.0	2.3	6.0	0.35	1000	
	A0111.031.0014	FDH2-250	0.8X6.35	7.5	30.0	19.0	2.3	6.0	0.4	1000	
	A0111.031.0015	FDH2-312	0.8X8.0	9.1	31.0	19.0	2.3	6.0	0.4	1000	
A10. Metal Flexible Conduit	A0111.031.0016	FDH2-375	1.2X9.4	10.0	35.1	19.0	2.3	6.0	0.5	1000	Blue 蓝色
	A0111.031.0017	FDH5.5-110(5)	0.5X2.8	3.2	31.0	22.0	3.4	7.5	0.4	500	
	A0111.031.0018	FDH5.5-110(8)	0.8X2.8	3.2	31.0	22.0	3.4	7.5	0.4	500	
A11. Terminal	A0111.031.0019	FDH5.5-187(5)	0.5X4.75	5.0	31.0	22.0	3.4	7.5	0.4	500	Yellow 黄色
	A0111.031.0020	FDH5.5-187(8)	0.8X4.75	5.0	31.0	22.0	3.4	7.5	0.4	500	
	A0111.031.0021	FDH5.5-250	0.8X6.35	7.5	33.0	22.0	3.4	7.5	0.4	500	
	A0111.031.0022	FDH5.5-312	0.8X8.0	8.2	36.0	22.0	3.4	7.5	0.4	500	
A12. Copper Tube Terminals	A0111.031.0023	FDH5.5-375	1.2X9.4	10.9	37.6	22.0	3.4	7.5	0.5	500	Yellow 黄色

CE RoHS

EASCO® Vinyl-Insulated Female Quick Disconnects Double Crimp EASCO® 双压接式母预绝缘接头



Material: Brass with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 300V
材质: 黄铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 300V



Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
货号	型号	插线规格	W	L	H	d1	D	T	包装数 (个)	颜色
A0111.071.0001	FDD1.25-110(5)D	0.5X2.8	3.8	19.0	10.0	1.7	3.8	0.3	1000	Red 红色
A0111.071.0002	FDD1.25-110(8)D	0.8X2.8	3.8	19.0	10.0	1.7	3.8	0.3	1000	
A0111.071.0003	FDD1.25-187(5)D	0.5X4.75	5.8	19.0	10.0	1.7	3.8	0.35	1000	
A0111.071.0004	FDD1.25-187(8)D	0.8X4.75	5.8	19.0	10.0	1.7	3.8	0.35	1000	
A0111.071.0005	FDD1.25-205(5)D	0.5X5.2	6.5	19.0	10.0	1.7	3.8	0.35	1000	
A0111.071.0006	FDD1.25-250D	0.8X6.35	7.4	21.0	10.0	1.7	3.8	0.4	1000	
A0111.071.0007	FDD1.25-312D	0.8X8.0	9.1	24.0	10.0	1.7	3.8	0.4	1000	
A0111.071.0008	FDD2-110(5)D	0.5X2.8	3.8	19.0	10.0	2.3	4.7	0.3	1000	Blue 蓝色
A0111.071.0009	FDD2-110(8)D	0.8X2.8	3.8	19.0	10.0	2.3	4.7	0.3	1000	
A0111.071.0010	FDD2-187(5)D	0.5X4.75	5.8	19.0	10.0	2.3	4.7	0.3	1000	
A0111.071.0011	FDD2-187(8)D	0.8X4.75	5.8	19.0	10.0	2.3	4.7	0.3	1000	
A0111.071.0012	FDD2-205(8)D	0.8x5.2	6.5	19.3	10.0	2.3	4.7	0.35	1000	
A0111.071.0013	FDD2-250D	0.8X6.35	7.5	21.0	10.0	2.3	4.7	0.4	1000	
A0111.071.0014	FDD2-312D	0.8X8.0	9.1	24.0	10.0	2.3	4.7	0.4	1000	
A0111.071.0015	FDD2-375D	1.2X9.4	10.0	26.1	10.0	2.3	4.7	0.4	1000	Yellow 黄色
A0111.071.0016	FDD5.5-110(5)D	0.5X2.8	3.2	22.0	13.0	3.4	5.6	0.4	500	
A0111.071.0017	FDD5.52-110(8)D	0.8X2.8	3.2	22.0	13.0	3.4	5.6	0.4	500	
A0111.071.0018	FDD5.5-187(5)D	0.5X4.75	5.0	22.0	13.0	3.4	5.6	0.4	500	
A0111.071.0019	FDD5.5-187(8)D	0.8X4.75	5.0	22.0	13.0	3.4	5.6	0.4	500	
A0111.071.0020	FDD5.5-250D	0.8X6.35	7.4	24.0	13.0	3.4	5.6	0.4	500	
A0111.071.0021	FDD5.5-312D	0.8X8.0	8.2	27.0	13.0	3.4	5.6	0.4	500	
A0111.071.0022	FDD5.5-375D	1.2X9.4	10.9	28.6	13.0	3.4	5.6	0.5	500	

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier


- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS

EASCO® Vinyl-Insulated Male Quick Disconnects Double Crimp EASCO® 双压接式公预绝缘接头



Material: Brass with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 300V
材质: 黄铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 300V




Article No.	Part No.	Cable Range	Dimension(尺寸)						Pkg Qty (pcs)	Color
			W	L	H	d1	D	T		
货号	型号	插线规格	W	L	H	d1	D	T	包装数 (个)	颜色
A0111.072.0001	MDD1.25-110(5)D	0.5X2.8	2.8	19.0	10.0	1.7	3.8	0.5	1000	Red 红色
A0111.072.0002	MDD1.25-110(8)D	0.8X2.8	2.8	19.0	10.0	1.7	3.8	0.4	1000	
A0111.072.0003	MDD1.25-187(5)D	0.5X4.75	4.75	19.0	10.0	1.7	3.8	0.5	1000	
A0111.072.0004	MDD1.25-187(8)D	0.8X4.75	4.75	19.0	10.0	1.7	3.8	0.4	1000	
A0111.072.0005	MDD1.25-250D	0.8X6.35	6.35	21.0	10.0	1.7	3.8	0.4	1000	Blue 蓝色
A0111.072.0006	MDD2-187(5)D	0.5X4.75	4.75	19.0	10.0	2.3	4.7	0.5	1000	
A0111.072.0007	MDD2-187(8)D	0.8X4.75	4.75	19.0	10.0	2.3	4.7	0.4	1000	
A0111.072.0008	MDD2-250D	0.8X6.35	6.35	21.0	10.0	2.3	4.7	0.4	1000	
A0111.072.0009	MDD5.5-187(8)D	0.8X4.75	4.8	22.0	13.0	3.4	6.2	0.4	500	Yellow 黄色
A0111.072.0010	MDD5.5-250D	0.8X6.35	6.35	25.0	13.0	3.4	6.2	0.4	500	

CE RoHS

EASCO® Vinyl-Insulated Piggy Back Quick Disconnects Double Crimp EASCO® 双压接式肩背公母预绝缘接头



Material: Brass with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 300V
材质: 黄铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 300V




Article No.	Part No.	Cable Range	Dimension(尺寸)							Pkg Qty (pcs)	Color
			W	W1	L	H	d1	D	T		
货号	型号	插线规格	W	W1	L	H	d1	D	T	包装数 (个)	颜色
A0111.073.0001	PBDD1.25-250D	0.8X6.35	7.5	6.3	21.5	10.0	1.7	3.8	0.4	1000	Red 红色
A0111.073.0002	PBDD2-250D	0.8X6.35	7.5	6.3	21.5	10.0	2.3	4.7	0.4	500	Blue 蓝色
A0111.073.0003	PBDD5.5-250D	0.8X6.35	7.5	6.3	24.0	13.0	3.4	6.2	0.4	500	Yellow 黄色

CE RoHS EASCO® Non-Insulated Hook Terminals (勾型裸端子)



Material: Red Copper
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V
 材质: 紫铜
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数(个)
A0111.074.0001	HNB1.25-4	4	#8	4.3	8.0	7.0	15.8	4.8	1.7	3.4	0.7	1000
A0111.074.0002	HNB1.25-5	5	#10	5.3	8.0	7.0	15.8	4.8	1.7	3.4	0.7	1000
A0111.074.0003	HNB1.25-6	6	1/4"	6.4	11.6	11.2	21.8	4.8	1.7	3.4	0.7	1000
A0111.074.0004	HNB2-4	4	#8	4.3	8.5	7.75	16.8	4.8	2.3	4.0	0.8	1000
A0111.074.0005	HNB2-5	5	#10	5.3	9.5	7.5	17.1	4.8	2.3	4.0	0.8	1000
A0111.074.0006	HNB2-6	6	1/4"	6.4	12.0	11.0	21.8	4.8	2.3	4.0	0.8	1000
A0111.074.0007	HNB5.5-4	4	#8	4.3	9.5	8.85	19.6	6.0	3.4	5.5	1.0	500
A0111.074.0008	HNB5.5-5	5	#10	5.3	9.5	8.85	19.6	6.0	3.4	5.5	1.0	500
A0111.074.0009	HNB5.5-6	6	1/4"	6.4	12.0	10.5	22.5	6.0	3.4	5.5	1.0	500

CE RoHS EASCO® HV Type Insulated Hook Terminal Lugs (勾形预绝缘端子)



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T		
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数(个)	颜色
A0111.032.0001	HV1.25-4	4	#8	4.3	8.0	7.0	21.0	10.0	1.7	4.2	0.7	1000	Red 红色
A0111.032.0002	HV1.25-5	5	#10	5.3	8.0	7.0	21.0	10.0	1.7	4.2	0.7	1000	
A0111.032.0003	HV1.25-6	6	1/4"	6.4	11.6	11.2	27.0	10.0	1.7	4.2	0.7	1000	
A0111.032.0004	HV2-4	4	#8	4.3	8.5	7.75	22.0	10.0	2.3	4.7	0.8	1000	Blue 蓝色
A0111.032.0005	HV2-5	5	#10	5.3	9.5	7.5	22.3	10.0	2.3	4.7	0.8	1000	
A0111.032.0006	HV2-6	6	1/4"	6.4	12.0	11.0	27.0	10.0	2.3	4.7	0.8	1000	
A0111.032.0007	HV5.5-4	4	#8	4.3	9.5	8.85	26.6	13.0	3.4	6.5	1.0	500	Yellow 黄色
A0111.032.0008	HV5.5-5	5	#10	5.3	9.5	8.85	26.6	13.0	3.4	6.5	1.0	500	
A0111.032.0009	HV5.5-6	6	1/4"	6.4	12.0	10.5	29.5	13.0	3.4	6.5	1.0	500	

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS EASCO® HNY Type Insulated Nylon Hook Terminal Lugs (尼龙勾形预绝缘端子)



Material: Red Copper with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 105°C
 Max Voltage: 600V.
 材质: 紫铜, 尼龙
 表面镀层: 镀锡
 最大耐温: 105°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)									Pkg Qty (pcs)	Color
		螺栓口直径	美制螺旋旋号	d2	W	F	L	H	d1	D	T	包装数 (个)		
A0111.033.0001	HNY1.25-4	4	#8	4.3	8.0	7.0	22.0	11.0	1.7	4.3	0.7	1000	Red 红色	
A0111.033.0002	HNY1.25-5	5	#10	5.3	8.0	7.0	22.0	11.0	1.7	4.3	0.7	1000		
A0111.033.0003	HNY1.25-6	6	1/4"	6.4	11.6	11.2	28.0	11.0	1.7	4.3	0.7	1000		
A0111.033.0004	HNY2-4	4	#8	4.3	8.5	7.75	23.0	11.0	2.3	4.8	0.8	1000	Blue 蓝色	
A0111.033.0005	HNY2-5	5	#10	5.3	9.5	7.5	23.3	11.0	2.3	4.8	0.8	1000		
A0111.033.0006	HNY2-6	6	1/4"	6.4	12.0	11.0	28.0	11.0	2.3	4.8	0.8	1000		
A0111.033.0007	HNY5.5-4	4	#8	4.3	9.5	8.85	26.6	13.0	3.4	6.7	1.0	500	Yellow 黄色	
A0111.033.0008	HNY5.5-5	5	#10	5.3	9.5	8.85	26.6	13.0	3.4	6.7	1.0	500		
A0111.033.0009	HNY5.5-6	6	1/4"	6.4	12.0	10.5	29.5	13.0	3.4	6.7	1.0	500		

CE RoHS EASCO® MPH Type Insulated Bullet Lugs (Heat Shrinkable) EASCO® 子弹型公预绝缘接子(热收缩型)



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Working Temperature: -55°C~+125°C
 Heat Shrinkable Temp.: +80°C
 Fully Shrinkable Min. Temp.: +130°C
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 操作温度: -55°C~125°C
 开始收缩温度: 80°C
 最低完全收缩温度: 130°C




Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)	Color
		W	F	L	H	d1	D	T		
A0111.034.0001	MPH1.25-156	4.0	9.0	30.0	19.0	1.7	4.8	0.4	1000	Red 红色
A0111.034.0002	MPH2-156	4.0	9.0	30.0	19.0	2.3	5.8	0.4	1000	Blue 蓝色
A0111.034.0003	MPH2-195	5.0	9.0	30.0	19.0	2.3	5.8	0.4	1000	
A0111.034.0004	MPH5.5-156	4.0	9.0	33.0	22.0	3.4	6.8	0.4	500	Yellow 黄色
A0111.034.0005	MPH5.5-195	5.0	9.0	33.0	22.0	3.4	6.8	0.4	500	

CE RoHS EASCO® FRH Type Insulated Bullet Female Lugs (Heat Shrinkable) EASCO® 子弹型母预绝缘端子(热收缩型)



Material: Red Copper with PE insulation.
Plating Material: Tin plating.
Working Temperature: -55°C~+125°C
Heat Shrinkable Temp.: +80°C
Fully Shrinkable Min. Temp.: +130°C
材质:紫铜, 聚乙烯
表面镀层: 镀锡
操作温度: -55°C~125°C
开始收缩温度: 80°C
最低完全收缩温度: 130°C




Article No.	Part No.	Dimension(尺寸)						Pkg Qty (pcs)	Color
货号	型号	W	F	L	d1	D	T	包装数(个)	颜色
A0111.035.0001	FRH1.25-156	3.9	13.0	32.3	1.7	4.8	0.4	1000	Red 红色
A0111.035.0002	FRH2-156	3.9	14.0	32.3	2.3	5.8	0.4	1000	Blue 蓝色
A0111.035.0003	FRH2-195	4.9	14.0	32.3	2.3	5.8	0.4	1000	
A0111.035.0004	FRH5.5-156	3.9	14.0	34.0	3.4	6.8	0.4	500	Yellow 黄色
A0111.035.0005	FRH5.5-195	4.9	14.0	34.0	3.4	6.8	0.4	500	

CE RoHS EASCO® MPD Type Insulated Bullet Terminal Lugs (子弹型公预绝缘端子)



Material: Brass with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 300V
材质: 黄铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 300V




Article No.	Part No.	Dimension(尺寸)						Pkg Qty (pcs)	Color	
货号	型号	W	F	L	H	d1	D	T	包装数(个)	颜色
A0111.036.0001	MPD1.25-156	4.0	9.0	21.0	10.0	1.7	3.8	0.4	1000	Red 红色
A0111.036.0002	MPD2-156	4.0	9.0	21.0	10.0	2.3	4.3	0.4	1000	Blue 蓝色
A0111.036.0003	MPD2-195	5.0	9.0	21.0	10.0	2.3	4.3	0.4	1000	
A0111.036.0004	MPD5.5-195	5.0	9.0	24.0	13.0	3.4	5.6	0.4	500	Yellow 黄色

CE RoHS EASCO® FRD Type Insulated Female Terminal Lugs (子弹型母全绝缘端子)



Material: Brass with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 300V
材质: 黄铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 300V



Article No.	Part No.	Dimension(尺寸)						Pkg Qty (pcs)	Color
货号	型号	W	F	L	d1	D	T	包装数(个)	颜色
A0111.037.0001	FRV1.25-156	3.9	13.0	23.3	1.7	3.8	0.4	1000	Red 红色
A0111.037.0002	FRV2-156	3.9	14.0	23.3	2.3	4.3	0.4	1000	Blue 蓝色
A0111.037.0003	FRV2-195	4.9	14.0	23.3	2.3	4.3	0.4	1000	
A0111.037.0004	FRV5.5-156	3.9	14.0	25.0	3.4	5.6	0.4	500	Yellow 黄色
A0111.037.0005	FRV5.5-195	4.9	14.0	25.0	3.4	5.6	0.4	500	


- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS

EASCO® MPFNYD Type Nylon Insulated Bullet Male Terminal Lugs EASCO® 尼龙子弹形公全绝缘接子



Material: Brass with Nylon insulation.
Plating Material: Tin plating.
Max Working Temperature: 105°C
Max Voltage: 300V
材质: 黄铜, 尼龙
表面镀层: 镀锡
最大耐温: 105°C
最大电压: 300V

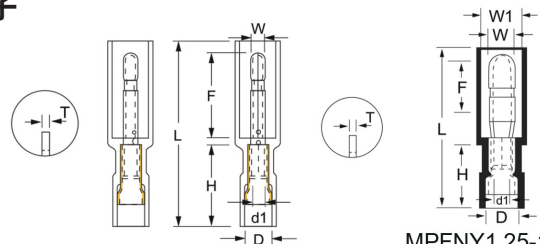

MPFNYD0.5-078

MPFNY1.25-156
MPFNY2-156


Article No.	Part No.	Dimension(尺寸)								Pkg Qty (pcs)	Color
		W	W1	F	L	H	d1	D	T		
A0111.038.0001	MPFNYD0.5-078	2.05		10.0	24.8	11.0	1.6	3.5	0.3	500	Transparent 透明白
A0111.038.0002	MPFNY1.25-156	4.0	7.4	9.0	27.0	10.0	1.7	4.0	0.4	500	Red 红色
A0111.038.0003	MPFNY2-156	4.0	8.6	9.0	27.0	10.0	2.3	5.0	0.4	500	Blue 蓝色

CE RoHS

EASCO® FRFNY Type Nylon Insulated Bullet Female Terminal Lugs EASCO® 尼龙子弹形母全绝缘接子



Material: Brass with Nylon insulation.
Plating Material: Tin plating.
Max Working Temperature: 105°C
Max Voltage: 300V
材质: 黄铜, 尼龙
表面镀层: 镀锡
最大耐温: 105°C
最大电压: 300V

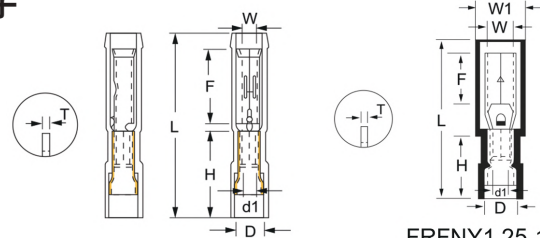


FRFNYD0.5-078

FRFNY1.25-156
FRFNY2-156

Article No.	Part No.	Dimension(尺寸)								Pkg Qty (pcs)	Color
		W	W1	F	L	H	d1	D	T		
A0111.039.0001	FRFNYD0.5-078	2.05		10.0	24.8	11.0	1.6	3.5	0.3	500	Transparent 透明白
A0111.039.0002	FRFNY1.25-156	3.9	6.9	9.0	25.2	11.0	1.7	4.0	0.4	500	Red 红色
A0111.039.0003	FRFNY2-156	3.9	7.9	9.0	25.2	11.0	2.3	5.0	0.4	500	Blue 蓝色

CE RoHS EASCO® Pin Terminals (针形冷压端头)


Material: Red Copper. (材质: 紫铜)

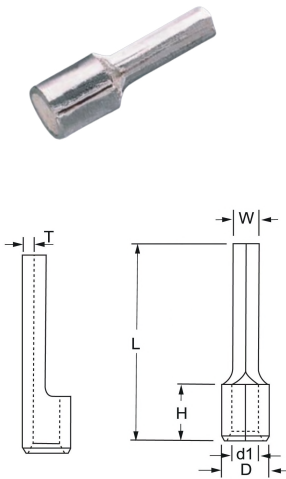

Article No. 货号	Part No. 型号	Dimension(尺寸)						Pkg Qty (pcs) 包装数 (个)
		W	L	H	D	d1	T	
A0111.075.0001	IT0.5-1	1.5	12.0	4.0	2.2	1.2	0.5	1000
A0111.075.0002	IT1-2	2.0	15.0	4.0	3.2	1.7	0.7	1000
A0111.075.0003	IT1.5-2	2.0	16.0	5.0	3.6	2.0	0.7	1000
A0111.075.0004	IT1.5-3	3.0	17.0	5.0	3.6	2.0	0.7	1000
A0111.075.0005	IT2.5-2	2.0	16.5	5.0	4.2	2.6	0.7	1000
A0111.075.0006	IT2.5-3	3.0	18.0	5.0	4.2	2.6	0.7	1000
A0111.075.0007	IT4-3	3.0	19.0	6.0	5.2	3.2	1.0	1000
A0111.075.0008	IT6-4	4.0	20.5	7.0	6.2	4.2	1.0	1000
A0111.075.0009	IT10-5-15.5	5.0	24.0	8.5	8.0	5.6	1.0	500
A0111.075.0010	IT10-5-30	4.0	39.0	9.0	8.0	5.6	1.0	500
A0111.075.0011	IT16-6-19	6.0	30.0	11.0	10.0	7.0	1.5	200
A0111.075.0012	IT16-5-23	5.0	34.5	11.0	10.0	7.0	1.5	200
A0111.075.0013	IT16-5-30	5.0	41.5	11.0	10.0	7.0	1.5	100
A0111.075.0014	IT25-6-21	6.0	33.0	12.0	12.0	8.0	1.8	200
A0111.075.0015	IT25-6-23	6.0	35.5	12.0	12.0	8.0	1.8	200
A0111.075.0016	IT25-6-30	6.0	42.0	12.0	12.0	8.0	1.8	100
A0111.075.0017	IT35-6-23	6.0	37.0	14.0	13.0	9.0	1.8	100
A0111.075.0018	IT50-7	7.0	38.0	14.0	15.0	11.0	1.8	100

CE RoHS EASCO® PTN Type Non Insulated Pin Terminal Lugs (针型裸端子)

Material: Red Copper. (材质: 紫铜)

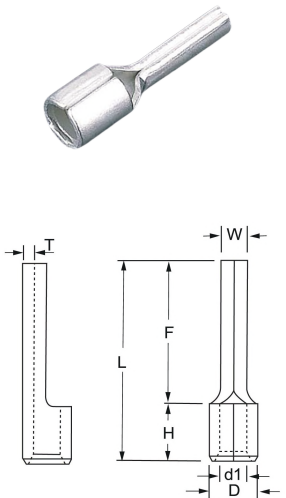

Article No. 货号	Part No. 型号	Dimension(尺寸)							Pkg Qty (pcs) 包装数 (个)
		W	F	L	H	d1	D	T	
A0111.040.0001	PTNB1.25-9	1.9	9.0	13.8	4.8	1.7	3.4	0.7	1000
A0111.040.0002	PTNB1.25-10	1.9	10.0	14.8	4.8	1.7	3.4	0.7	1000
A0111.040.0003	PTNB1.25-12	1.9	12.0	16.8	4.8	1.7	3.4	0.7	1000
A0111.040.0004	PTNB1.25-13	1.9	13.0	17.8	4.8	1.7	3.4	0.7	1000
A0111.040.0005	PTNB1.25-18	1.9	18.0	21.8	4.8	1.7	3.4	0.7	1000
A0111.040.0006	PTNB2-9	1.9	9.0	13.8	4.8	2.3	4.0	0.8	1000
A0111.040.0007	PTNB2-10	1.9	10.0	14.8	4.8	2.3	4.0	0.8	1000
A0111.040.0008	PTNB2-12	1.9	12.0	16.8	4.8	2.3	4.0	0.8	1000
A0111.040.0009	PTNB2-13	1.9	13.0	17.8	4.8	2.3	4.0	0.8	1000
A0111.040.0010	PTNB2-18	1.9	18.0	21.8	4.8	2.3	4.0	0.8	1000
A0111.040.0011	PTNB3.5-10	2.8	10.0	16.0	6.0	3.0	5.0	1.0	1000
A0111.040.0012	PTNB3.5-13	2.8	13.0	19.0	6.0	3.0	5.0	1.0	1000
A0111.040.0013	PTNB5.5-13	2.8	13.0	19.0	6.8	3.4	5.5	1.0	1000
A0111.040.0014	PTNB5.5-18	2.8	18.0	19.0	6.8	3.4	5.5	1.0	1000
A0111.040.0015	PTNB5.5-25	2.8	25	31	6.8	3.4	5.5	1.0	1000
A0111.040.0016	PTNB8-25	4.0	28	36.5	8.5	4.8	7.2	1.2	500
A0111.040.0017	PTNB10-12	4.3	14	22	8	4.5	6.9	1.1	500
A0111.040.0018	PTNB14-25	4.0	28.5	39	10.5	6.0	9.0	1.4	500
A0111.040.0019	PTNB16-13	5.5	16	26	10	5.8	2.4	1.2	500
A0111.040.0020	PTNB22-25	5.0	28.5	40.5	12.0	8.1	11.5	1.7	200
A0111.040.0021	PTNB25-15	6.8	20	33.5	13.5	7	9.5	1.2	200
A0111.040.0022	PTNB35-20	8	24.5	40.5	16	8.4	11.8	1.5	200
A0111.040.0023	PTNB35-25	5.0	28.5	40.5	14.0	9.7	13.3	1.7	200
A0111.040.0024	PTNB50-20	9.5	26	45	19	9.6	13.6	1.8	100
A0111.040.0025	PTNB70-25	11	31	55	24	11.4	15.8	2	50
A0111.040.0026	PTNB95-25	12.5	31	55	24	13.5	15.9	2.5	50

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip


A17. Insulating Nut

A18. Nylon Cable Carrier

CE RoHS EASCO® PTV Type Insulated Pin Terminal Lugs (针形预绝缘端子)



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)	Color
货号	型号	W	F	L	H	d1	D	T	包装数 (个)	颜色
A0111.041.0001	PTV0.5-10	1.6	10.0	18.5	8.5	1.2	2.3	0.5	1000	Yellow 黄色
A0111.041.0002	PTV1.25-9	1.6	9.0	19.0	10.0	1.7	4.2	0.7	1000	Red 红色
A0111.041.0003	PTV1.25-10	1.6	10.0	20.0	10.0	1.7	4.2	0.7	1000	
A0111.041.0004	PTV1.25-12	1.6	12.0	22.0	10.0	1.7	4.2	0.7	1000	
A0111.041.0005	PTV1.25-13	1.6	13.0	23.0	10.0	1.7	4.2	0.7	1000	
A0111.041.0006	PTV1.25-18	1.6	18.0	27.0	10.0	1.7	4.2	0.7	1000	
A0111.041.0007	PTV2-9	1.6	9.0	19.0	10.0	2.3	4.7	0.8	1000	
A0111.041.0008	PTV2-10	1.6	10.0	20.0	10.0	2.3	4.7	0.8	1000	
A0111.041.0009	PTV2-12	1.6	12.0	22.0	10.0	2.3	4.7	0.8	1000	
A0111.041.0010	PTV2-13	1.6	13.0	23.0	10.0	2.3	4.7	0.8	1000	Black 黑色
A0111.041.0011	PTV2-18	1.6	18.0	27.0	10.0	2.3	4.7	0.8	1000	
A0111.041.0012	PTV3.5-10	2.8	10.0	23.0	13.0	2.9	6.2	1.0	500	Yellow 黄色
A0111.041.0013	PTV3.5-13	2.8	13.0	26.0	13.0	2.9	6.2	1.0	500	
A0111.041.0014	PTV5.5-13	2.8	13.0	26.0	13.0	3.4	6.5	1.0	500	
A0111.041.0015	PTV5.5-18	2.8	18.0	31.0	13.0	3.4	6.5	1.0	500	

CE RoHS EASCO® PTNY Type Nylon Insulated Pin Terminal Lugs (尼龙针形预绝缘端子)



Material: Red Copper with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 105°C
 Max Voltage: 600V.
 材质: 尼龙, 紫铜
 表面镀层: 镀锡
 最大耐温: 105°C
 最大电压: 600V



Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)	Color
货号	型号	W	F	L	H	d1	D	T	包装数 (个)	颜色
A0111.042.0001	PTNY1.25-9	1.9	9.0	20.0	11.0	1.7	4.3	0.7	1000	Red 红色
A0111.042.0002	PTNY1.25-10	1.9	10.0	21.0	11.0	1.7	4.3	0.7	1000	
A0111.042.0003	PTNY1.25-12	1.9	12.0	23.0	11.0	1.7	4.3	0.7	1000	
A0111.042.0004	PTNY1.25-13	1.9	13.0	24.0	11.0	1.7	4.3	0.7	1000	
A0111.042.0005	PTNY1.25-18	1.9	18.0	28.0	11.0	1.7	4.3	0.7	1000	
A0111.042.0006	PTNY2-9	1.9	9.0	20.0	11.0	2.3	4.8	0.8	1000	
A0111.042.0007	PTNY2-10	1.9	10.0	21.0	11.0	2.3	4.8	0.8	1000	
A0111.042.0008	PTNY2-12	1.9	12.0	23.0	11.0	2.3	4.8	0.8	1000	
A0111.042.0009	PTNY2-13	1.9	13.0	24.0	11.0	2.3	4.8	0.8	1000	
A0111.042.0010	PTNY2-18	1.9	18.0	28.0	11.0	2.3	4.8	0.8	1000	Black 黑色
A0111.042.0011	PTNY3.5-10	2.8	10.0	23.0	13.0	2.9	6.2	1.0	500	
A0111.042.0012	PTNY3.5-13	2.8	13.0	26.0	13.0	2.9	6.2	1.0	500	
A0111.042.0013	PTNY5.5-13	2.8	13.0	26.0	13.0	3.4	6.7	1.0	500	Yellow 黄色
A0111.042.0014	PTNY5.5-18	2.8	13.0	26.0	13.0	3.4	6.7	1.0	500	


CE RoHS

EASCO® PTV Type Insulated Pin Terminal Lugs (Double Crimp)

EASCO® 双压接式针形预绝缘端子



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V
 Double Crimp: With copper shielded.
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V
 双压接: 带有铜套



Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)	Color
		W	F	L	H	d1	D	T		
A0111.043.0001	PTV1.25-9D	1.9	9.0	19.0	10.0	1.7	4.5	0.7	1000	Red 红色
A0111.043.0002	PTV1.25-10D	1.9	10.0	20.0	10.0	1.7	4.5	0.7	1000	
A0111.043.0003	PTV1.25-12D	1.9	12.0	22.0	10.0	1.7	4.5	0.7	1000	
A0111.043.0004	PTV1.25-13D	1.9	13.0	23.0	10.0	1.7	4.5	0.7	1000	
A0111.043.0005	PTV1.25-18D	1.9	18.0	27.0	10.0	1.7	4.5	0.7	1000	
A0111.043.0006	PTV2-9D	1.9	9.0	19.0	10.0	2.3	5	0.8	1000	Blue 蓝色
A0111.043.0007	PTV2-10D	1.9	10.0	20.0	10.0	2.3	5	0.8	1000	
A0111.043.0008	PTV2-12D	1.9	12.0	22.0	10.0	2.3	5	0.8	1000	
A0111.043.0009	PTV2-13D	1.9	13.0	23.0	10.0	2.3	5	0.8	1000	
A0111.043.0010	PTV2-18D	1.9	18.0	27.0	10.0	2.3	5	0.8	1000	
A0111.043.0011	PTV5.5-13D	2.8	13.0	26.0	13.0	3.4	6.7	1	500	Yellow 黄色

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip


A17. Insulating Nut

A18. Nylon Cable Carrier

CE RoHS EASCO® Square Tongue Terminals (方型裸端子)



Material: Red Copper
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V
 材质: 紫铜
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Stud Size		Dimension(尺寸)								Pkg Qty (pcs)
		螺柱口直径	美制螺旋拴号	d2	W	F	L	H	d1	D	T	
货号	型号	Metric	American	d2	W	F	L	H	d1	D	T	包装数 (个)
A0111.070.0001	SQNB22-5	5	#10	5.3	12.5	13.5	32.0	12.0	8.1	11.5	1.7	250
A0111.070.0002	SQNB22-6	6	1/4"	6.5	12.5	13.5	32.0	12.0	8.1	11.5	1.7	250
A0111.070.0003	SQNB22-8	8	5/16"	8.5	12.5	13.5	32.0	12.0	8.1	11.5	1.7	250
A0111.070.0004	SQNB38-5	5	#10	5.3	13.5	16.3	38.0	14.0	9.7	13.3	1.8	200
A0111.070.0005	SQNB38-6	6	1/4"	6.5	13.5	16.3	38.0	14.0	9.7	13.3	1.8	200
A0111.070.0006	SQNB38-8	8	5/16"	8.5	13.5	16.3	38.0	14.0	9.7	13.3	1.8	200
A0111.070.0007	SQNB38-10	10	3/8"	10.5	13.5	16.3	38.0	14.0	9.7	13.3	1.8	200
A0111.070.0008	SQNB60-6	6	1/4"	6.5	16.0	20.7	47.2	18.0	11.6	15.4	1.8	100
A0111.070.0009	SQNB60-8	8	5/16"	8.5	16.0	20.7	47.2	18.0	11.6	15.4	1.8	100
A0111.070.0010	SQNB60-10	10	3/8"	10.5	16.0	20.7	47.2	18.0	11.6	15.4	1.8	100
A0111.070.0011	SQNB70-8	8	5/16"	8.5	17.5	20.0	48.0	18.0	13.5	17.5	1.9	50
A0111.070.0012	SQNB70-10	10	3/8"	10.5	17.5	20.0	48.0	18.0	13.5	17.5	1.9	50
A0111.070.0013	SQNB70-12	12	1/2"	13	17.5	20.0	48.0	18.0	13.5	17.5	1.9	50
A0111.070.0014	SQNB80-8	8	5/16"	8.5	21.8	20.0	49.0	19.0	15.1	19.5	2.2	50
A0111.070.0015	SQNB80-10	10	3/8"	10.5	21.8	20.0	49.0	19.0	15.1	19.5	2.2	50
A0111.070.0016	SQNB80-12	12	1/2"	13.0	21.8	20.0	49.0	19.0	15.1	19.5	2.2	50
A0111.070.0017	SQNB100-8	8	5/16"	8.5	21.8	21.0	54.0	21.0	17.1	22.1	2.5	25
A0111.070.0018	SQNB100-10	10	3/8"	10.5	21.8	21.0	54.0	21.0	17.1	22.1	2.5	25
A0111.070.0019	SQNB100-12	12	1/2"	13.0	21.8	21.0	54.0	21.0	17.1	22.1	2.5	25
A0111.070.0020	SQNB150-8	8	5/16"	8.5	22.0	22.3	61.3	27.0	20.2	26.6	3.2	25
A0111.070.0021	SQNB150-10	10	3/8"	10.5	22.0	22.3	61.3	27.0	20.2	26.6	3.2	25
A0111.070.0022	SQNB150-12	12	1/2"	13.0	22.0	22.3	61.3	27.0	20.2	26.6	3.2	25
A0111.070.0023	SQNB200-10	10	3/8"	10.5	36.0	22.3	73.0	31.5	24.8	32.6	3.9	10
A0111.070.0024	SQNB200-12	12	1/2"	13.0	36.0	22.3	73.0	31.5	24.8	32.6	3.9	10
A0111.070.0025	SQNB325-12	12	1/2"	13.0	37.2	32.0	87.7	35.5	28.0	37.6	4.2	5.0
A0111.070.0026	SQNB325-16	16	5/8"	17.0	37.2	32.0	87.7	35.5	28.0	37.6	4.2	5.0
A0111.070.0027	SQNB325-18	18	11/16"	19.0	37.2	32.0	87.7	35.5	28.0	37.6	4.2	5.0

CE RoHS EASCO® DBN Type Non Insulated Blade Terminal Lugs (片形裸端子)

Material: Red Copper. (材质:紫铜)

Plating Material: Tin plating. (表面镀层:镀锡)

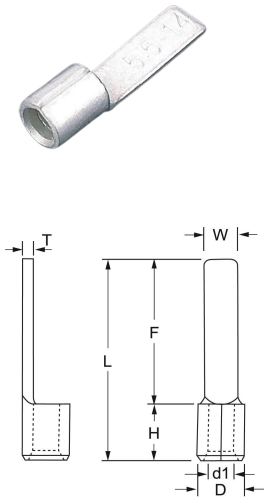


Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)
		W	F	L	H	d1	D	T	
货号	型号	包装数 (个)							
A0111.044.0001	DBNB1.25-9	2.8	9.0	13.8	4.8	1.8	3.4	0.7	1000
A0111.044.0002	DBNB1.25-10	2.3	10.0	14.8	4.8	1.8	3.4	0.7	1000
A0111.044.0003	DBNB1.25-11	3.0	11.0	15.8	4.8	1.8	3.4	0.7	1000
A0111.044.0004	DBNB1.25-11S	2.3	11.0	15.8	4.8	1.8	3.4	0.7	1000
A0111.044.0005	DBNB1.25-13	3.0	13.0	17.8	4.8	1.8	3.4	0.7	1000
A0111.044.0006	DBNB1.25-13S	2.3	13.0	17.8	4.8	1.8	3.4	0.7	1000
A0111.044.0007	DBNB1.25-14	3.0	14.0	18.8	4.8	1.8	3.4	0.7	1000
A0111.044.0008	DBNB1.25-14S	2.3	14.0	18.8	4.8	1.8	3.4	0.7	1000
A0111.044.0009	DBNB1.25-18	2.3	18.0	22.8	4.8	1.8	3.4	0.7	1000
A0111.044.0010	DBNB1.25-18S	2.0	18.0	22.8	4.8	1.8	3.4	0.7	1000
A0111.044.0011	DBNB2-9	2.8	9.0	13.8	4.8	2.4	4.0	0.8	1000
A0111.044.0012	DBNB2-10	2.3	10.0	14.8	4.8	2.4	4.0	0.8	1000
A0111.044.0013	DBNB2-13	2.4	13.0	17.8	4.8	2.4	4.0	0.8	1000
A0111.044.0014	DBNB2-13L	3.0	13.0	17.8	4.8	2.4	4.0	0.8	1000
A0111.044.0015	DBNB2-14	2.4	14.0	18.8	4.8	2.4	4.0	0.8	1000
A0111.044.0016	DBNB2-14L	3.0	14.0	18.8	4.8	2.4	4.0	0.8	1000
A0111.044.0017	DBNB2-18S	2.0	18.0	22.8	4.8	2.4	4.0	0.8	1000
A0111.044.0018	DBNB2-18	2.5	18.0	22.8	4.8	2.4	4.0	0.8	1000
A0111.044.0019	DBNB2-18L	2.8	18.0	22.8	4.8	2.4	4.0	0.8	1000
A0111.044.0020	DBNB5.5-10	2.8	10.0	16.0	6.8	3.5	5.5	1.0	1000
A0111.044.0021	DBNB5.5-14S	4.0	14.0	20.0	6.8	3.5	5.5	1.0	1000
A0111.044.0022	DBNB5.5-14	4.5	14.0	20.0	6.8	3.5	5.5	1.0	1000
A0111.044.0023	DBNB5.5-18S	2.0	18.0	24.0	6.8	3.5	5.5	1.0	1000
A0111.044.0024	DBNB5.5-18	4.5	18.0	24.0	6.8	3.5	5.5	1.0	1000
A0111.044.0025	DBNB8-14	5	14.0	22.5	8.5	4.8	7.2	1.2	500
A0111.044.0026	DBNB14-16	6	16.0	26.5	10.5	6.0	9.0	1.4	500
A0111.044.0027	DBNB14-16L	6	16.0	30.0	14.0	6.0	9.0	1.4	500
A0111.044.0028	DBNB22-17	7.0	17.0	29.0	12.0	8.1	11.5	1.8	250
A0111.044.0029	DBNB38-16	6.5	16.0	30.0	14.0	9.7	13.3	1.8	200

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS EASCO® DBV Type Insulated Blade Terminal Lugs (片型预绝缘端子)




Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)	Color
		W	F	L	E	d1	D	T		
货号	型号	W	F	L	E	d1	D	T	包装数 (个)	颜色
A0111.045.0001	DBV1.25-9	2.8	9.0	19	10.0	1.7	4.2	0.7	1000	Red 红色
A0111.045.0002	DBV1.25-10	2.3	10.0	20	10.0	1.7	4.2	0.7	1000	
A0111.045.0003	DBV1.25-11	3.0	11.0	21.0	10.0	1.7	4.2	0.7	1000	
A0111.045.0004	DBV1.25-11S	2.3	11.0	21.0	10.0	1.7	4.2	0.7	1000	
A0111.045.0005	DBV1.25-13	3.0	13.0	23	10.0	1.7	4.2	0.7	1000	
A0111.045.0006	DBV1.25-13S	2.3	13.0	23	10.0	1.7	4.2	0.7	1000	
A0111.045.0007	DBV1.25-14	3.0	14.0	24.0	10.0	1.7	4.2	0.7	1000	
A0111.045.0008	DBV1.25-14S	2.3	14.0	24.0	10.0	1.7	4.2	0.7	1000	
A0111.045.0009	DBV1.25-18	2.2	18.0	28	10.0	1.7	4.2	0.7	1000	
A0111.045.0010	DBV1.25-18S	2.0	18.0	28	10.0	1.7	4.2	0.7	1000	
A0111.045.0011	DBV2-9	3.0	9.0	19.0	10.0	2.3	4.7	0.8	1000	Blue 蓝色
A0111.045.0012	DBV2-10	2.4	10.0	20.0	10.0	2.3	4.7	0.8	1000	
A0111.045.0013	DBV2-13	2.4	13.0	23.0	10.0	2.3	4.7	0.8	1000	
A0111.045.0014	DBV2-13L	3.0	13.0	23.0	10.0	2.3	4.7	0.8	1000	
A0111.045.0015	DBV2-14	2.4	14.0	24.0	10.0	2.3	4.7	0.8	1000	
A0111.045.0016	DBV2-14L	3.0	14.0	24.0	10.0	2.3	4.7	0.8	1000	
A0111.045.0017	DBV2-18S	2.0	18.0	28.0	10.0	2.3	4.7	0.8	1000	
A0111.045.0018	DBV2-18	2.2	18.0	28.0	10.0	2.3	4.7	0.8	1000	
A0111.045.0019	DBV2-18L	2.8	18.0	28.0	10.0	2.3	4.7	0.8	1000	
A0111.045.0020	DBV5.5-10	2.8	10.0	21.2	11.2	3.4	6.5	1.0	1000	
A0111.045.0021	DBV5.5-14S	4.0	14.0	25.2	11.2	3.4	6.5	1.0	1000	Yellow 黄色
A0111.045.0022	DBV5.5-14	4.5	14.0	25.2	11.2	3.4	6.5	1.0	1000	
A0111.045.0023	DBV5.5-18S	2.0	18.0	29.2	11.2	3.4	6.5	1.0	1000	
A0111.045.0024	DBV5.5-18	4.5	18.0	29.2	11.2	3.4	6.5	1.0	1000	
A0111.045.0025	DBV8-14	5	14.0	27.7	13.7	4.8	7.2	1.2	500	
A0111.045.0026	DBV14-16	6	16.0	31.7	15.7	6.0	9.0	1.4	500	
A0111.045.0027	DBV14-16L	6	16.0	35.2	19.2	6.0	9.0	1.4	500	
A0111.045.0028	DBV22-17	6.5	17.0	34.2	17.2	8.1	11.5	1.8	250	
A0111.045.0029	DBV38-16	6.5	16.0	35.2	19.2	9.7	13.3	1.8	200	

CE RoHS

EASCO® DBNY Type Nylon Insulated Blade Terminal Lugs EASCO® 尼龙片型预绝缘端子



Material: Red Copper with Nylon insulation.
Plating Material: Tin plating.
Max Working Temperature: 105°C
Max Voltage: 600V
材质: 紫铜, 尼龙
表面镀层: 镀锡
最大耐温: 105°C
最大电压: 600V



Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)	Color
货号	型号	W	F	L	H	d1	D	T	包装数 (个)	颜色
A0111.046.0001	DBNY1.25-9	2.8	9.0	20.0	11.0	1.8	4.3	0.7	1000	Red 红色
A0111.046.0002	DBNY1.25-10	2.3	10.0	21.0	11.0	1.8	4.3	0.7	1000	
A0111.046.0003	DBNY1.25-11	3.0	11.0	22.0	11.0	1.8	4.3	0.7	1000	
A0111.046.0004	DBNY1.25-13	3.0	13.0	24.0	11.0	1.8	4.3	0.7	1000	
A0111.046.0005	DBNY1.25-14	3.0	14.0	25.0	11.0	1.8	4.3	0.7	1000	
A0111.046.0006	DBNY1.25-18	2.2	18.0	29.0	11.0	1.8	4.3	0.7	1000	
A0111.046.0007	DBNY1.25-18S	2.0	18.0	29.0	11.0	1.8	4.3	0.7	1000	
A0111.046.0008	DBNY2-9	3.0	9.0	20.0	11.0	2.4	4.8	0.8	1000	Blue 蓝色
A0111.046.0009	DBNY2-10	2.4	10.0	21.0	11.0	2.4	4.8	0.8	1000	
A0111.046.0010	DBNY2-13	2.4	13.0	24.0	11.0	2.4	4.8	0.8	1000	
A0111.046.0011	DBNY2-13L	3.0	13.0	24.0	11.0	2.4	4.8	0.8	1000	
A0111.046.0012	DBNY2-14	2.4	14.0	25.0	11.0	2.4	4.8	0.8	1000	
A0111.046.0013	DBNY2-14L	3.0	14.0	25.0	11.0	2.4	4.8	0.8	1000	
A0111.046.0014	DBNY2-18S	2.0	18.0	29.0	11.0	2.4	4.8	0.8	1000	
A0111.046.0015	DBNY2-18	2.2	18.0	29.0	11.0	2.4	4.8	0.8	1000	Yellow 黄色
A0111.046.0016	DBNY2-18L	2.8	18.0	29.0	11.0	2.4	4.8	0.8	1000	
A0111.046.0017	DBNY5.5-10	2.8	10.0	23.0	13.0	3.5	6.7	1.0	500	
A0111.046.0018	DBNY2-14S	4.0	14.0	27.0	13.0	3.5	6.7	1.0	500	
A0111.046.0019	DBNY5.5-14	4.5	14.0	27.0	13.0	3.5	6.7	1.0	500	
A0111.046.0020	DBNY2-18S	2.0	18.0	31.0	13.0	3.5	6.7	1.0	500	
A0111.046.0021	DBNY5.5-18	4.5	18.0	31.0	13.0	3.5	6.7	1.0	500	
A0111.046.0022	DBNY8-14	5	14.0	27.7	13.7	4.8	7.2	1.2	500	Terminal
A0111.046.0023	DBNY14-16	6	16.0	31.7	15.7	6.0	9.0	1.4	500	
A0111.046.0024	DBNY14-16L	6	16.0	35.2	19.2	6.0	9.0	1.4	500	
A0111.046.0025	DBNY22-17	6.5	17.0	34.2	17.2	8.1	11.5	1.8	250	
A0111.046.0026	DBNY38-16	6.5	16.0	35.2	19.2	9.7	13.3	1.8	200	


- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS EASCO® LBV Type Insulated Blade Terminal Lugs (凹片形预绝缘端子)



Material: Red Copper with PE insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 75°C
 Max Voltage: 600V.
 材质: 紫铜, 聚乙烯
 表面镀层: 镀锡
 最大耐温: 75°C
 最大电压: 600V




Article No.	Part No.	Dimension(尺寸)								Pkg Qty (pcs)	Color
		W	F	L	H	d1	D	T	A		
货号	型号	W	F	L	H	d1	D	T	A	包装数(个)	颜色
A0111.047.0001	LBV1.25-3	3.0	17.8	27.8	10.0	1.7	4.2	0.7	2.1	1000	Red 红色
A0111.047.0002	LBV1.25-4.6	4.6	17.8	27.8	10.0	1.7	4.2	0.7	2.1	1000	
A0111.047.0003	LBV2-3	3.0	17.8	27.8	10.0	2.3	4.7	0.8	2.1	1000	Blue 蓝色
A0111.047.0004	LBV2-4.6	4.6	17.8	27.8	10.0	2.3	4.7	0.8	2.1	1000	
A0111.047.0005	LBV5.5-3	3.0	18.2	31.2	13.0	3.4	6.5	1.0	2.75	500	Yellow 黄色
A0111.047.0006	LBV5.5-4.6	4.6	18.2	31.2	13.0	3.4	6.5	1.0	2.75	500	

CE RoHS EASCO® LBNY Type Nylon Insulated Blade Terminal Lugs (凹片形预绝缘端子)



Material: Red Copper with Nylon insulation.
 Plating Material: Tin plating.
 Max Working Temperature: 105°C
 Max Voltage: 600V
 材质: 紫铜, 尼龙
 表面镀层: 镀锡
 最大耐温: 105°C
 最大电压: 600V




Article No.	Part No.	Dimension(尺寸)								Pkg Qty (pcs)	Color
		W	F	L	H	d1	D	T	A		
货号	型号	W	F	L	H	d1	D	T	A	包装数(个)	颜色
A0111.048.0001	LBNY1.25-3	3.0	17.8	28.8	11.0	1.7	4.3	0.7	2.1	1000	Red 红色
A0111.048.0002	LBNY1.25-4.6	4.6	17.8	28.8	11.0	1.7	4.3	0.7	2.1	1000	
A0111.048.0003	LBNY2-3	3.0	17.8	28.8	11.0	2.3	4.8	0.8	2.1	1000	Blue 蓝色
A0111.048.0004	LBNY2-4.6	4.6	17.8	28.8	11.0	2.3	4.8	0.8	2.1	1000	
A0111.048.0005	LBNY5.5-3	3.0	18.2	31.2	13.0	3.4	6.7	1.0	2.75	500	Yellow 黄色
A0111.048.0006	LBNY5.5-4.6	4.6	18.2	31.2	13.0	3.4	6.7	1.0	2.75	500	

CE RoHS EASCO® PVT Type Fully Insulated Terminal Lugs EASCO® 短形全绝缘中间接头



Material: Red Copper with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V
材质: 紫铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V




Article No.	Part No.	Dimension(尺寸)				Max.Current	Pkg Qty (pcs)	Color
货号	型号	L	L1	D	d1	最大电流	包装数 (个)	颜色
A0111.049.0001	PVT1.25	16.0	8.0	4.3	2.3	19A	1000	Red 红色
A0111.049.0002	PVT2	16.0	8.0	5.0	2.95	27A	1000	Blue 蓝色
A0111.049.0003	PVT5.5	20.5	8.5	6.3	4.45	48A	500	Yellow 黄色

CE RoHS EASCO® BV Type Fully Insulated Terminal Lugs EASCO® 长形全绝缘中间接头



Material: Red Copper with PE insulation.
Plating Material: Tin plating.
Max Working Temperature: 75°C
Max Voltage: 600V
材质: 紫铜, 聚乙烯
表面镀层: 镀锡
最大耐温: 75°C
最大电压: 600V



Article No.	Part No.	Dimension(尺寸)				Max. Current	Wire Range. (A.W.G)	Cable Range (mm ²)	Pkg Qty (pcs)	Color
货号	型号	L	L1	D	d1	最大电流	导线面积 (A.W.G)	导线面积 (mm ²)	包装数 (个)	颜色
A0111.050.0001	BV1.25	24.6	15.0	4.2	2.15	19A	22-16	0.5-1.5	1000	Red 红色
A0111.050.0002	BV2	24.6	15.0	4.7	2.75	27A	16-14	1.5-2.5	1000	Blue 蓝色
A0111.050.0003	BV3.5	24.6	15.0	5.8	3.5	37A	14-12	2.5-4	500	Black 黑色
A0111.050.0004	BV5.5	26.0	15.0	6.3	4.25	48A	10-12	4-6	500	Yellow 黄色
A0111.050.0005	BV8	35.0	21.0	8.5	5.0	62A	8 (8)	6-10	200	Red 红色
A0111.050.0006	BV14	45.0	26.0	10.5	6.6	88A	14(6)	10-16	50	Blue 蓝色
A0111.050.0007	BV22	52.0	29.0	12.5	8.0	115A	22 (4)	16-25	50	Yellow 黄色

A1. Wiring Ducts

CE RoHS EASCO® PNT Type Non Insulated Terminal Lugs (短形中间裸接头)

A2. Cable Ties


Material: Red Copper. (材质:紫铜)
Plating Material: Tin plating. (表面镀层:镀锡)

A3. Din Rails



A4. Cable Markers

A5. Cable Clamps



A6. Wrapping Bands

A7. Nylon Cable Gland

Article No.	Part No.	Dimension(尺寸)				Pkg Qty (pcs)
货号	型号	L	D	d1	T	包装数 (个)
A0111.051.0001	PNT1	8.0	3.35	2.15	0.6	1000
A0111.051.0002	PNT2	8.0	3.95	2.75	0.6	1000
A0111.051.0003	PNT5	8.5	5.45	4.25	0.6	1000
A0111.051.0004	PNT8	9.5	7.0	5.0	1.0	1000
A0111.051.0005	PNT14	11.0	9.0	6.6	1.2	500
A0111.051.0006	PNT22	13.5	11.0	8.0	1.5	250
A0111.051.0007	PNT38	16.5	13.0	10.0	1.5	200
A0111.051.0008	PNT60	19.0	15.3	11.4	1.95	100
A0111.051.0009	PNT70	19.0	17.5	13.3	2.1	100
A0111.051.0010	PNT80	19.5	19.5	14.5	2.5	50
A0111.051.0011	PNT100	20.0	22.0	16.4	2.8	20
A0111.051.0012	PNT150	27.0	26.5	19.5	3.5	20
A0111.051.0013	PNT180	28.5	28.5	21.0	3.75	10
A0111.051.0014	PNT200	32.0	32.5	24.0	4.2	10
A0111.051.0015	PNT325	37.0	37.0	28.0	4.5	5

A8. Metal Cable Gland


A9. Plastic Flexible Conduit

CE RoHS EASCO® BNYF Type Nylon Fully Insulated Terminal Lugs (EASCO® 尼龙长形全绝缘中间接头)

A10. Metal Flexible Conduit



Material: Red Copper with Nylon insulation.
Plating Material: Tin plating.
Max Working Temperature: 105°C
Max Voltage: 600V
材质:紫铜, 尼龙
表面镀层:镀锡
最大耐温:105°C
最大电压:600V



A11. Terminal

Article No.	Part No.	Dimension(尺寸)				Max.Current	Pkg Qty (pcs)	Color
货号	型号	L	L1	D	d1	最大电流	包装数 (个)	颜色
A0111.052.0001	BNYF0.5	20.0	10.0	3.6	1.15	9A	1000	Yellow 黄色
A0111.052.0002	BNYF1.25	25.2	15.0	4.0	2.15	19A	500	Red 红色
A0111.052.0003	BNYF2	25.2	15.0	4.5	2.75	27A	500	Blue 蓝色
A0111.052.0004	BNYF5.5	28.0	15.0	6.3	4.25	48A	500	Yellow 黄色

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators


A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier


CE RoHS EASCO® BHT Type Fully Insulated Terminal Lugs (Heat Shrinkable) EASCO® 长型全绝缘中间接头(热收缩型)



Material: Red Copper with PE insulation. (材质: 紫铜, 聚乙烯)
 Plating Material: Tin plating. (表面镀层: 镀锡)
 Working Temperature: -55°C~+125°C (操作温度: -55°C~125°C)
 Heat Shrinkable Temp.: +80°C (开始收缩温度: 80°C)
 Fully Shrinkable Min. Temp.: +130°C (最低完全收缩温度: 130°C)

Article No.	Part No.	Dimension(尺寸)		Max.Current	Pkg Qty (pcs)	Color
货号	型号	d2	L	最大电流	包装数 (个)	颜色
A0111.053.0001	BHT0.5	1.0	27.0	9A	1000	Yellow 黄色
A0111.053.0002	BHT1.25	1.7	37.0	19A	500	Red 红色
A0111.053.0003	BHT2	2.3	37.0	27A	500	Blue 蓝色
A0111.053.0004	BHT5.5	3.4	41.0	48A	500	Yellow 黄色


CE RoHS EASCO® FDFH Type Fully Insulated Terminal Lugs (Heat Shrinkable) EASCO® 全预绝缘接头(热收缩型)



Material: Brass with PE insulation. (材质: 黄铜, 聚乙烯)
 Plating Material: Tin plating. (表面镀层: 镀锡)
 Working Temperature: -55°C~+125°C (操作温度: -55°C~125°C)
 Heat Shrinkable Temp.: +80°C (开始收缩温度: 80°C)
 Fully Shrinkable Min. Temp.: +130°C (最低完全收缩温度: 130°C)

Article No.	Part No.	Cable Range	Dimension(尺寸)					Pkg Qty (pcs)	Color
货号	型号	插线规格	W	L	d1	D	T	包装数 (个)	颜色
A0111.054.0001	FDFH1.25-250	0.8X6.35	7.5	30.5	1.7	7.0	0.4	500	Red 红色
A0111.054.0002	FDFH2-250	0.8X6.35	7.5	30.5	2.3	7.0	0.4	500	Blue 蓝色
A0111.054.0003	FDFH5.5-250	0.8X6.35	7.5	33.0	3.4	7.5	0.4	500	Yellow 黄色

CE RoHS EASCO® SST Type Insulated Terminal Lugs (Heat Shrinkable) EASCO® 焊锡环热缩中间管




Material: PE insulation. (材质: 聚乙烯)
 Working Temperature: -55°C~+125°C (操作温度: -55°C~125°C)
 Shrinking Temp.: +60°C~+130°C (收缩温度: +60°C~+130°C)
 Tin Plated Melting Temp.: +111°C~+118°C (焊锡溶解温度: +111°C~+118°C)


Article No.	Part No.	Dimension(尺寸)					Max. Current	Wire Range. (A.W.G)	Cable Range (mm ²)	Pkg Qty (pcs)	Color
货号	型号	A(min)	L(min)	B(min)	B&C(min)	C(min)	导线面积 (A.W.G)	导线面积 (mm ²)	包装数 (个)	颜色	
A0111.055.0001	SST-S11	1.7	26	1.0	1.7	0.76	26-24	0.25-0.34	1000	Red 红色	
A0111.055.0002	SST-S21	2.7	40	1.4	2.7	1.2	22-18	0.5-1.0	1000		
A0111.055.0003	SST-S31	4.5	40	2.3	4.5	2.0	16-14	1.5-2.5	1000	Blue 蓝色	
A0111.055.0004	SST-S41	6.0	40	3.7	6.0	3.4	12-10	4.0-6.0	500	Yellow 黄色	

A1. Wiring Ducts
A2. Cable Ties
A3. Din Rails

CE RoHS EASCO® Single Voltage High Tensile Solder Terminals EASCO® 单压高抗拉焊锡端子



Material: PE insulation.(材质:聚乙烯)
Working Temperature: -55°C~+125°C(操作温度:-55°C~125°C)
Shrinking Temp.: +60°C~+130°C(收缩温度:+60°C~130°C)
Tin Plated Melting Temp.: +111°C~+118°C(焊锡溶解温度:+111°C~118°C)




Article No.	Part No.	Dimension(尺寸)		Max. Current	Wire Range. (A.W.G)	Cable Range (mm²)	Pkg Qty (pcs)	Color
		货号	型号					
A0111.076.0001	SST-H11	0.76	26.0	4.5A	26-24	0.25-0.34	1000	Yellow 黄色
A0111.076.0002	SST-H21	1.7	36.0	19A	22-16	0.5-1.5	500	Red 红色
A0111.076.0003	SST-H31	2.3	36.0	27A	16-14	1.5-2.5	500	Blue 蓝色
A0111.076.0004	SST-H41	3.4	41.0	48A	12-10	4-6	500	Yellow 黄色

A4. Cable Markers
A5. Cable Clamps

CE RoHS EASCO® Nylon Quick Connects (快速接头)



Material: Red Copper with PP insulation.(材质:紫铜, PP)
Max Working Temperature: 105°C(最大耐温:105°C)
Max Voltage: 600V(最大电压:600V)




Article No.	Part No.	Cable Range	Dimension(尺寸)		Pkg Qty (pcs)	Color
			W	L		
A0111.056.0001	878100	22-18AWG 0.5-0.75mm²	20	27	200	Red 红色
A0111.056.0002	878101	18~14AWG 0.75~2.5mm²	20	27	200	Blue 蓝色
A0111.056.0003	878101-WHITE	18~14AWG 0.75~2.5mm²	20	27	200	White 白色
A0111.056.0004	878201	12~10AWG 4~6mm²	20.5	34.5	200	Yellow 黄色

A6. Wrapping Bands
A7. Nylon Cable Gland
A8. Metal Cable Gland
A9. Plastic Flexible Conduit
A10. Metal Flexible Conduit

CE RoHS EASCO® Quick Connects (快速接头)



Material: Red Copper with Nylon insulation.(材质:紫铜, 尼龙)
Max Working Temperature: 105°C(最大耐温:105°C)
Max Voltage: 600V(最大电压:600V)




Article No.	Part No.	Cable Range	Dimension(尺寸)		Pkg Qty (pcs)	Color
			W	L		
A0111.057.0001	878006	22-18AWG 0.5-0.75mm²	9.8	37	500	Red 红色
A0111.057.0002	878106	18-14AWG 0.75~2.5mm²	9.8	37	500	Blue 蓝色
A0111.057.0003	878206	12~10AWG 4mm²	9.8	37	500	Yellow 黄色

A11. Terminal
A12. Copper Tube Terminals
A13. Heat Shrinkable Tubings

CE RoHS EASCO® P Type Screw Wire Connector (螺旋式压线帽)



Material: PVC Rubber.(材质:PVC塑料橡胶)
Max Working Temperature: 105°C(最大耐温:105°C)
Max Voltage: 300V, 600V(最大电压:300V, 600V)




Article No.	Part No.	Dimension(尺寸)			Pkg Qty (pcs)	Color
		A	B	C		
A0111.060.0001	P1	15.2	8.5	6.7	1000	Grey 灰色
A0111.060.0002	P2	17.6	10.1	7.4	1000	Blue 蓝色
A0111.060.0003	P3	22	12.6	9.9	500	Orange 橙色
A0111.060.0004	P4	24.5	13.7	11	500	Yellow 黄色
A0111.060.0005	P6	27.4	16	13.7	500	Red 红色

A15. Tool
A16. Cable Clip
A17. Insulating Nut
A18. Nylon Cable Carrier

CE RoHS EASCO® Vinyl Wire End Cap (PVC绝缘软套管)

Material: PVC.(材质:PVC)

Color: Red, Yellow, Blue, Green, White And Black, Available In Six Colors To Choose From.(颜色:红黄蓝绿白黑,六种颜色可供选择)



Article No.	Part No.	Dimension(尺寸)							Pkg Qty (pcs)
货号	型号	D1	D2	D3	L	F	B	T	包装数 (个)
A0111.058.0001	V1.25	2.8	3.3	3.1	13.0	6.0	7.0	0.6	1000
A0111.058.0002	V2	3.3	4.5	3.7	14.0	7.0	7.0	0.7	1000
A0111.058.0003	V3.5	4.2	5.7	4.1	17.0	9.0	8.0	0.8	1000
A0111.058.0004	V5.5	4.8	5.7	5.2	17.0	9.0	8.0	0.8	500
A0111.058.0005	V8	6.2	7.2	6.2	19.0	10.0	9.0	1.0	500
A0111.058.0006	V14	7.5	10.0	8.0	25.0	14.0	11.0	1.1	200
A0111.058.0007	V22	10.5	12.0	9.5	30.0	15.0	15.0	1.2	200
A0111.058.0008	V38	12.5	14.0	11.8	34.0	17.5	16.5	1.5	100
A0111.058.0009	V60	15.0	16.8	13.5	39.0	20.0	19.0	1.5	100
A0111.058.0010	V70	16.0	17.5	14.5	43.0	22.0	20.0	1.5	50
A0111.058.0011	V80	17.0	19.0	16.0	47.0	25.0	22.0	1.5	50
A0111.058.0012	V100	19.0	22.0	18.0	54.0	30.0	24.0	1.6	50
A0111.058.0013	V125	21.0	24.0	20.0	57.0	32.0	25.0	1.7	50
A0111.058.0014	V150	23.0	24.5	22.0	65.0	35.0	30.0	1.8	25
A0111.058.0015	V200	27.0	32.0	24.0	65.0	35.0	30.0	2.0	20
A0111.058.0016	V240	29.0	38.0	26.5	77.0	35.0	39.0	2.0	20
A0111.058.0017	V325	29.0	38.0	29.0	77.0	37.0	40.0	2.5	20
A0111.058.0018	V400	42.0	45.0	36.0	85.0	46.0	41.0	2.5	10
A0111.058.0019	V500	46.0	48.0	40.0	88.0	46.0	42.0	2.5	10
A0111.058.0020	V630	52.0	50.0	44.0	92.0	50.0	47.0	2.5	10

CE RoHS EASCO® V Type PVC End Caps (尼龙压线帽)

Material: Red Copper with Nylon insulation.

Plating Material: Tin plating.

Max Working Temperature: 105°C


Max Voltage: 600V

材质:紫铜, 尼龙

表面镀层:镀锡

最大耐温:105°C

最大电压:600V



Article No.	Part No.	Dimension(尺寸)			Cable Range (mm²)	Wire Range. (A.W.G)	Cable Range (mm)	Pkg Qty (pcs)	Color
货号	型号	L	L1	D	导线面积 (mm²)	导线面积 (A.W.G)	合适的压接工具	包装数 (个)	颜色
A0111.059.0001	CE-1	17.5	6.2	2.6	1.25	22-18	AK-25 MR-30A IZUM1#7A IZUM1 AC-5ND	1000	White 白色
A0111.059.0002	CE-2	19.7	7.9	3	2	22-14		1000	
A0111.059.0003	CE-5	27.7	10.5	5.6	5.5	22-10		500	
A0111.059.0004	CE-8	29.8	11.5	4.4	8	16-10		200	
A0111.059.0005	CEF1.25	15.3	9	2.35	1.25	22-18	AK-25 MR-30A IZUM1#7A IZUM1 AC-5ND	1000	Red 红色
A0111.059.0006	CEF2	18.5	9.1	3.0	2	22-14		1000	Blue 蓝色
A0111.059.0007	CEF5.5	20	12	5.0	5.5	22-10		500	Yellow 黄色